



# PRODUCT **CATALOGUE**

MI/DJ





Cameo® is a brand of the Adam Hall Group.



ADAM HALL GROUP BRANDS



DISTRIBUTION BRANDS



Here at **Cameo**®, our mission is to make smart, innovative and high-quality lighting technology accessible to a wide audience. Because all of our products are developed in Germany at our headquarters near Frankfurt am Main, we are able to respond quickly and spontaneously to the wishes and suggestions of our customers. In this way, we can be confident that all of the passion invested into our products will ensure that they consistently meet the current and future requirements of our customers. Functionality and design go hand-in-hand during development, and this enables us to be one hundred percent behind each of our products.

**cameolight.com**

Cameo® is a brand of the Adam Hall Group.



[facebook.com/cameolightandsound](https://facebook.com/cameolightandsound)  
[youtube.com/cameolightandsound](https://youtube.com/cameolightandsound)  
[blog.adamhall.com](https://blog.adamhall.com)







# TABLE OF **CONTENT**

CONTROLLERS .....	7
LED MOVING HEADS .....	13
PIXEL MAPPING .....	27
THEATRE SPOTLIGHTS .....	31
LED STANDARD PAR CANS.....	37
LED FLAT PARS .....	49
LED STUDIO PARS .....	61
LED OUTDOOR FIXTURES .....	79
LED BARS .....	83
LASERS.....	91
LED STROBES .....	99
LED LIGHT EFFECTS.....	107
LED SCANNERS .....	127
LED LIGHT SETS .....	135
FOG MACHINES .....	149
ACCESSORIES .....	155
LASER ACCESSORIES.....	163
ICON LEGENDS.....	166
REGISTER.....	170



**cameo**  
colours of light  
dvc

Intelligent  
DMX  
Interface

DMX512  
pin 1 ground  
pin 2 data-  
pin 3 data+

DMX


NO Ports

# CONTROLLERS

Cameo offers a selection of hardware and software for convenient remote control of DMX fixtures and intelligent lighting systems in live and installed applications.

Our **DVC4 USB-to-DMX interface** and the **free D4 software package for Windows and macOS** provide a fully featured solution that turns your computer into a customizable controller to create light shows with real-time visualization and live editing. Pre-programmed shows can be stored and run directly from the DMX interface in standalone Mode.

Compact, easily portable and intuitive to operate Cameo lighting desks are perfect for DJs, clubs, bars and small to medium lighting rigs. **The 54-Channel Control 54** handles up to nine fixtures or fixture groups and comes with direct access buttons for a variety of colours, functions and Modes while the entry level **Control 6 features** six Channel Faders and an overall master. For hands-free operation the range includes a rugged 4-switch foot controller with bright LED indicators.

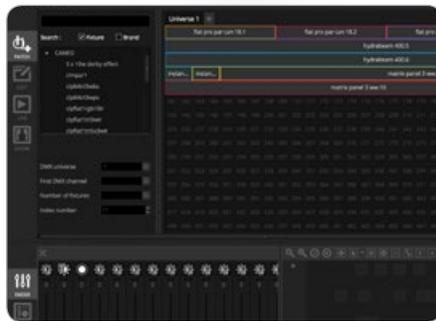

# DVC 4

## 512-CHANNEL DMX INTERFACE AND CONTROL SOFTWARE PACKAGE

### FEATURES

- ▶ Built-in flash memory for 256 DMX channels in Standalone Mode
- ▶ User friendly and intuitive Cameo DMX lighting software package by Daslight running on Windows and macOS for free download
- ▶ Software includes more than 15,000 fixture libraries, or create your own using the integrated ScanLibrary editor
- ▶ Create hundreds of amazing pixel and video effects plus moving head and scanner positions with the powerful XEEL engine
- ▶ Trigger scenes and control levels with a multi-touch screen, iOS / Android or MIDI/DMX controller
- ▶ Synchronize your show with the BPM or pulse of the music via the included audio analyzer or MIDI clock
- ▶ Design your show and pre-render your lighting effects with the real-time 3D visualization tool



### SPECIFICATIONS

Product Number:	CLDVC4
Product Type:	USB To DMX Interface
Live Channels:	512
Standalone Channels:	256
Software Mode:	Full Cameo D 4 / Full Daslight DVC 4
Inputs:	Mini USB
Outputs:	XLR 3-Pin Female
Memory:	20 K

Dry Contact Ports:	8
Operating Voltage:	USB
Width:	78 mm
Height:	27 mm
Depth:	88 mm
Accessories (included):	USB to Mini USB cable
Weight:	0.2 kg



# CONTROL 54

## 54-CHANNEL DMX CONTROLLER

- ▶ 54-Channel DMX controller
- ▶ For up to 9 fixtures or fixture groups
- ▶ Compatible with all RGB, RGBW, RGBWA and RGBWA+UV fixtures
- ▶ 6 smooth faders for Red, Green, Blue, White, Amber and UV intensity control
- ▶ 9 colour presets with direct-access buttons
- ▶ Direct access to Auto or Manual Modes, Blackout, Colour Jump, Colour Fade, Strobe and Sound Activation with sensitivity control
- ▶ Powered by included adapter or 9 V battery
- ▶ Ideal for DJs, nightclubs, lounges, bars etc.



## SPECIFICATIONS

Product Number:	CLCONTROL54
Product Type:	DMX Mixers
Number Of DMX Channels	54
Control:	USITT DMX 512 Protocol
Features:	Auto Mode, Blackout, Colour Jump, Colour Macros, Manual Control, Stroboscope, Colour Fade, Music Control
DMX Output:	XLR 3-Pin Female
Controls:	22 Control Buttons, 6x Channel Faders, Controller For Microphone Sensitivity, On / Off Switch

Indicators:	LC Display
Operating Voltage:	External Power Supply, 9 V Block, 9 - 12 V DC
Colour:	Grey
Material	Metal
Width:	316 mm
Height:	63 mm
Depth:	140 mm
Accessories (included):	9 V Block, Power Supply
Weight:	1.5 kg



## CONTROL 6

### 6-CHANNEL DMX CONTROLLER

- ▶ 6-Channel DMX controller
- ▶ Battery operation possible
- ▶ External Power Supply included
- ▶ Rugged metal housing



## SPECIFICATIONS

Product Number:	CLCONTROL6
Product Type:	DMX Mixers
Number Of DMX Channels:	6
DMX Output:	XLR 3-Pin Female
Controls:	Master Fader, 6x Channel Faders
Indicators:	Power LED

Operating Voltage:	9 V Block, External Power Supply, 9 - 12 V DC
Width:	167 mm
Height:	56 mm
Depth:	134 mm
Accessories (Included):	9 V block, Power Supply, AC Adapter
Weight:	1 kg




# **LED MOVING HEADS**

The LED moving head is a multifunctional headlight which can be freely adjusted. If you need a headlight that can be shifted around every axis and has an integrated colour changing system – here it is. It is also equipped with a variety of gobos to project creative patterns. Whatever amount of light is needed, with an LED moving head the light emission can be adjusted with a shutter or dimmer. Shine a light at discotheques, concerts, TV productions, theatres, or fashion events – the LED moving head can be used virtually everywhere where professional lighting is used.

Featuring

**OSRAM**

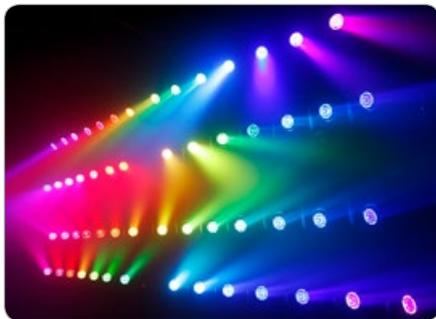

## MOVO® BEAM 100

### UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING

#### FEATURES

- ▶ Ultra-bright 60 W Osram RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED surround with single pixel control
- ▶ 2 high-speed motors for ultra-fast continuous pan and tilt
- ▶ Fantastic automated Modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX Modes and standalone, master or slave operation
- ▶ 2.5" TFT display and touch sensitive buttons for intuitive configuration
- ▶ Omega Mounting bracket included



#### SPECIFICATIONS

Product Number:	CLMB100
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 15-Channel
DMX Functions:	Auto Programs, Colour Ring Macro Speed, Dimmer Fine, PAN, PAN Unlimited Rotation, Pan/ Tilt Fine, PAN/ TILT Macros, Pan/ Tilt Speed, RGBW, Stroboscope, TILT, TILT Unlimited Rotation, Colour Fade, Colour Jump, Colour Macro, Colour Ring Macro, Dimmer, Dimmer Colour Ring, Dimmer Curve, RGB Ring 1-4, Strobe Colour Ring

PAN / TILT Movement:	Unlimited 540° / 270°
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	130 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	157,000 lx @ 1m
Luminous Flux:	1,480 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	5.2 kg

Featuring

**OSRAM**



## MOVO® BEAM Z 100

UNLIMITED ROTATION BEAM MOVING HEAD WITH LED RING AND ZOOM

NEW

### FEATURES

- ▶ Ultra-bright 60 W OSRAM RGBW LED for saturated primary colours, subtle pastel hues and natural shades of white
- ▶ Individually controllable 4-segment RGB LED ring with single pixel control
- ▶ 2 high-speed, high torque motors for ultra-fast unlimited pan and tilt
- ▶ Motor zoom with 4° to 30° range
- ▶ Spectacular automated modes
- ▶ 4 selectable dimming curves
- ▶ 3 DMX modes, standalone or master/slave operation
- ▶ 2.5" TFT display and touch panel for intuitive configuration
- ▶ Omega mounting bracket included



### SPECIFICATIONS

Product Number:	CLMBZ100
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	60 W OSRAM (Approx. 50.000 operating hours)
Refresh Rate:	1,000 Hz
Dispersion:	4 - 30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	16-channel, 5-channel, 36-channel
DMX Functions:	PAN, colour jump, Colour Ring Macro Speed, Pan/Tilt Speed, Zoom, colour fade, Pan/Tilt Macros, TILT UNLIMITED ROTATION, auto programs, Pan/Tilt fine, TILT, PAN UNLIMITED ROTATION, Stroboscope, Dimmer Fine, Strobe Colour Ring, Dimmer Curve, RGBW, Colour Ring Macro, Dimmer Colour Ring, RGB Ring 1-4, colour macro

PAN / TILT Movement:	Unlimited
Standalone Modes:	Static Mode, Auto Programs
Controls:	Enter, Value Up, Mode, Value Down
Indicators:	2.5" TFT display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	140 W
Power Connector:	Blue and White Power I/O
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	8500 lx @ 3 m
Luminous Flux:	1,220 lm
Dimensions (W x H x D):	210 x 299 x 210mm
Weight:	6.5 kg

Featuring


**CREE**   
LEDs

# HYDRABEAM 100 RGBW

ULTRA-FAST MOVINGHEAD  
WITH 10 W CREE RGBW LED



- ▶ Compact ultra-fast moving head
- ▶ Powerful 10 W Cree RGBW LED
- ▶ 5 Modes of DMX control
- ▶ Standalone, master and slave capability
- ▶ 4 effective automated operating Modes
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED Display for easy menu navigation and setting

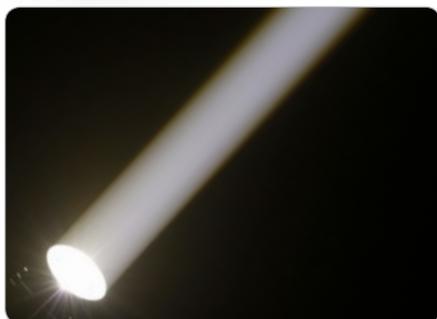

## SPECIFICATIONS

Product Number:	CLHB100RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	10 W
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3, 6, 9, 12, 14-Channel
DMX Functions:	Dimmer, Strobe, TILT, Colour Change, PAN
PAN / TILT Movement:	540° / 270°
High Speed Strobe:	20 Hz

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	blue 4,100 lx @ 1 m, green 27,000 lx @ 1 m, red 7,000 lx @ 1 m
Dimensions (W x H x D):	100 x 240 x 160 mm
Weight:	1 kg

Featuring

**CREE** LEDs


AVAILABLE WITH COLD-WHITE LED AND RGBW LED

## HYDRABEAM 300 W / 300 RGBW

LIGHTING SYSTEM WITH 3 ULTRA-FAST 10 W CREE RGBW QUAD LED MOVING HEADS



- ▶ Triangular moving head fixture
- ▶ 3 individually controllable ultra fast heads
- ▶ Ultra bright white 10 W Lumi-Engin LEDs / 10W high power Cree RGBW Quad-LEDs
- ▶ Universal mounting options
- ▶ Omega bracket and detachable Pole mount included
- ▶ 16 effective automated operating Modes
- ▶ 5 DMX Modes
- ▶ 4-button LED Display for easy manual control

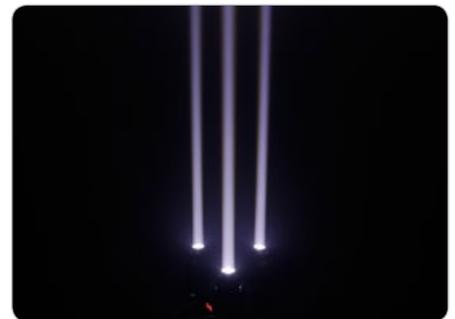

## SPECIFICATIONS

Product Number:	CLHB300W / CLHB300RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White / RGBW
Number Of LEDs:	3
LED Type:	10 W
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6, 10, 12, 22, 27-Channel / 6, 10, 16, 26, 36-Channel
DMX Functions:	Dimmer, Colour Change, TILT, Strobe, PAN
PAN/TILT Movement:	540° / 270°
High Speed Strobe:	20Hz

Standalone Modes:	Sound Control, Auto Run
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	60 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	92,000 lx @ 1 m / R=9,600 lx @ 1 m, G=22,400 lx @ 1 m, B=4,650 lx @ 1 m, W=w31,000 lx @ 1 m
Dimensions (W x H x L):	380 x 240 x 380 mm
Weight:	5.5 kg



## HYDRABEAM 4000 RGBW

LIGHTING SYSTEM WITH 4 ULTRA-FAST 32 W RGBW QUAD LED MOVING HEADS

NEW

### FEATURES

- ▶ Lighting system with 4 individually controllable moving heads
- ▶ Ultra fast 540° pan and 270° tilt
- ▶ Powerful 32 W RGBW Quad LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and pole mount adapter included
- ▶ Blue and grey Power Twist plus 3 and 5-Pin DMX connectors
- ▶ Easy daisy chaining and power linking
- ▶ 5 DMX modes, sound activation and automatic operation
- ▶ 16 exciting auto-run programs
- ▶ 4-button LC colour display for intuitive configuration



### SPECIFICATIONS

Product Number:	CLHB4000RGBW	Controls:	Enter , LCD display , mode , Value Down , Value Up
Product Type:	LED Moving Lights	Indicators:	colour LC display
Type:	LED Moving Effects	Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Colour Spectrum:	RGBW	Power consumption:	220 V
Number Of LEDs:	4	When 110V / 240 V, how many pcs can be connected:	3 / 5
Refresh rate:	6000 Hz	Power connector:	blue Power Twist male
LED Type:	32 W	Power through connector:	grey Power Twist female
Dispersion:	2.5 °	Max. output current:	11 A
DMX Input / Output:	XLR 3-pin male / female, XLR 5-pin male / female	Housing material:	ABS plastic , metal
RDM:	no	Cabinet colour:	Black
Protocols:	USITT DMX-512	Protection class IP:	IP20
DMX Mode:	6, 10, 19, 32, 56-Channel	Cooling:	low-noise fan
DMX Functions:	Auto programs, Colour change, Dimmer, PAN, strobe ,TILT	Illuminance:	blue 9600lx @ 1m , green 42400lx @ 1m , red 17900lx @ 1m , white 67200lx @ 1m
Wireless DMX:	no	Maximum Ambient Temperature:	0 - 40° C
PAN movement:	540	Dimensions (W x H x L):	1000 x 270 x 90 mm
TILT movement:	270	Weight:	11.6 kg
High Speed Strobe:	1 - 20 Hz		
Standalone modes:	Auto run , sound control		

AVAILABLE WITH COLD-WHITE LED AND RGBW LED

Featuring

**CREE**  **LEDs**

# HYDRABEAM 400 W / 400 RGBW

LIGHTING SET WITH 4 ULTRA-FAST  
10 W CREE QUAD LED MOVING HEADS

- ▶ Bar with 4 ultra-fast moving heads
- ▶ Each moving head can be controlled individually
- ▶ Powerful 10 W Cree RGBW or Cold White Quad LEDs
- ▶ Universal mounting options
- ▶ 2 Omega brackets and a removable tripod flange included
- ▶ 16 effective automated operating Modes
- ▶ Simple operation using the four buttons and LED Display



## SPECIFICATIONS

Product Number:	CLHB400W / CLHB400RGBW
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White / RGBW
Number Of LEDs:	4
LED Type:	10 W / 10 W Cree
Dispersion:	4.5 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6, 10, 15, 28-Channel / 6, 10, 19, 32-Channel
DMX Functions:	Dimmer, Colour Change, TILT, Strobe, PAN
PAN/TILT Movement:	540° / 540°
High Speed Strobe:	20Hz
Standalone Modes:	Sound Control, Auto Run

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	100 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	84,000 lx @ 1 m / red 10,670 lx @ 1 m, green 19,000 lx @ 1 m, blue 3,710 lx @ 1 m, white 27,600 lx @ 1 m
Dimensions (W x H x L):	810 x 250 x 130 mm
Weight:	7.5 kg

Featuring


**CREE** LEDs

## NANO BEAM 300

1 x 30 W CREE LED RGBW  
MINI MOVING HEAD  
WITH UNLIMITED PAN INCL. IR-REMOTE




- ▶ Miniature moving head with Unlimited pan and 230° tilt
- ▶ 30 W Cree RGBW LED
- ▶ Tightly focused 4° beam
- ▶ 8 show presets
- ▶ Modes of DMX control plus master, slave and standalone applications
- ▶ Automatic and sound activation Modes
- ▶ Inverse pan and tilt Mode
- ▶ 4-button display for intuitive operation
- ▶ IR Remote Control included
- ▶ Omega bracket for easy mounting

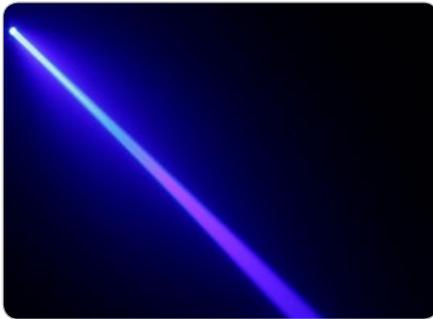

## SPECIFICATIONS

Product Number:	CLNB300
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	RGBW
Number Of LEDs:	1 x 4
LED Type:	30 W CREE (Approx. 50000 operating hours)
Dispersion:	4 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	7, 13, 11-Channel
DMX Functions:	Auto Programs, Colours, Pan/Tilt Fine, Sound Programs, Dimmer, Motor Speed, Pan/Tilt, Strobe
PAN/TILT Movement:	Unlimited / 230°
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Mode, Value Down, Enter, Value Up
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	70 W
Power Connector:	IEC Power Connector Male
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	G=59,000 lx @ 1m, W=72,000 lx @ 1m, B=17,000 lx @ 1m, R= 27,500 lx @ 1m
Dimensions (W x H x L):	175 x 275 x 145 mm
Weight:	3 kg

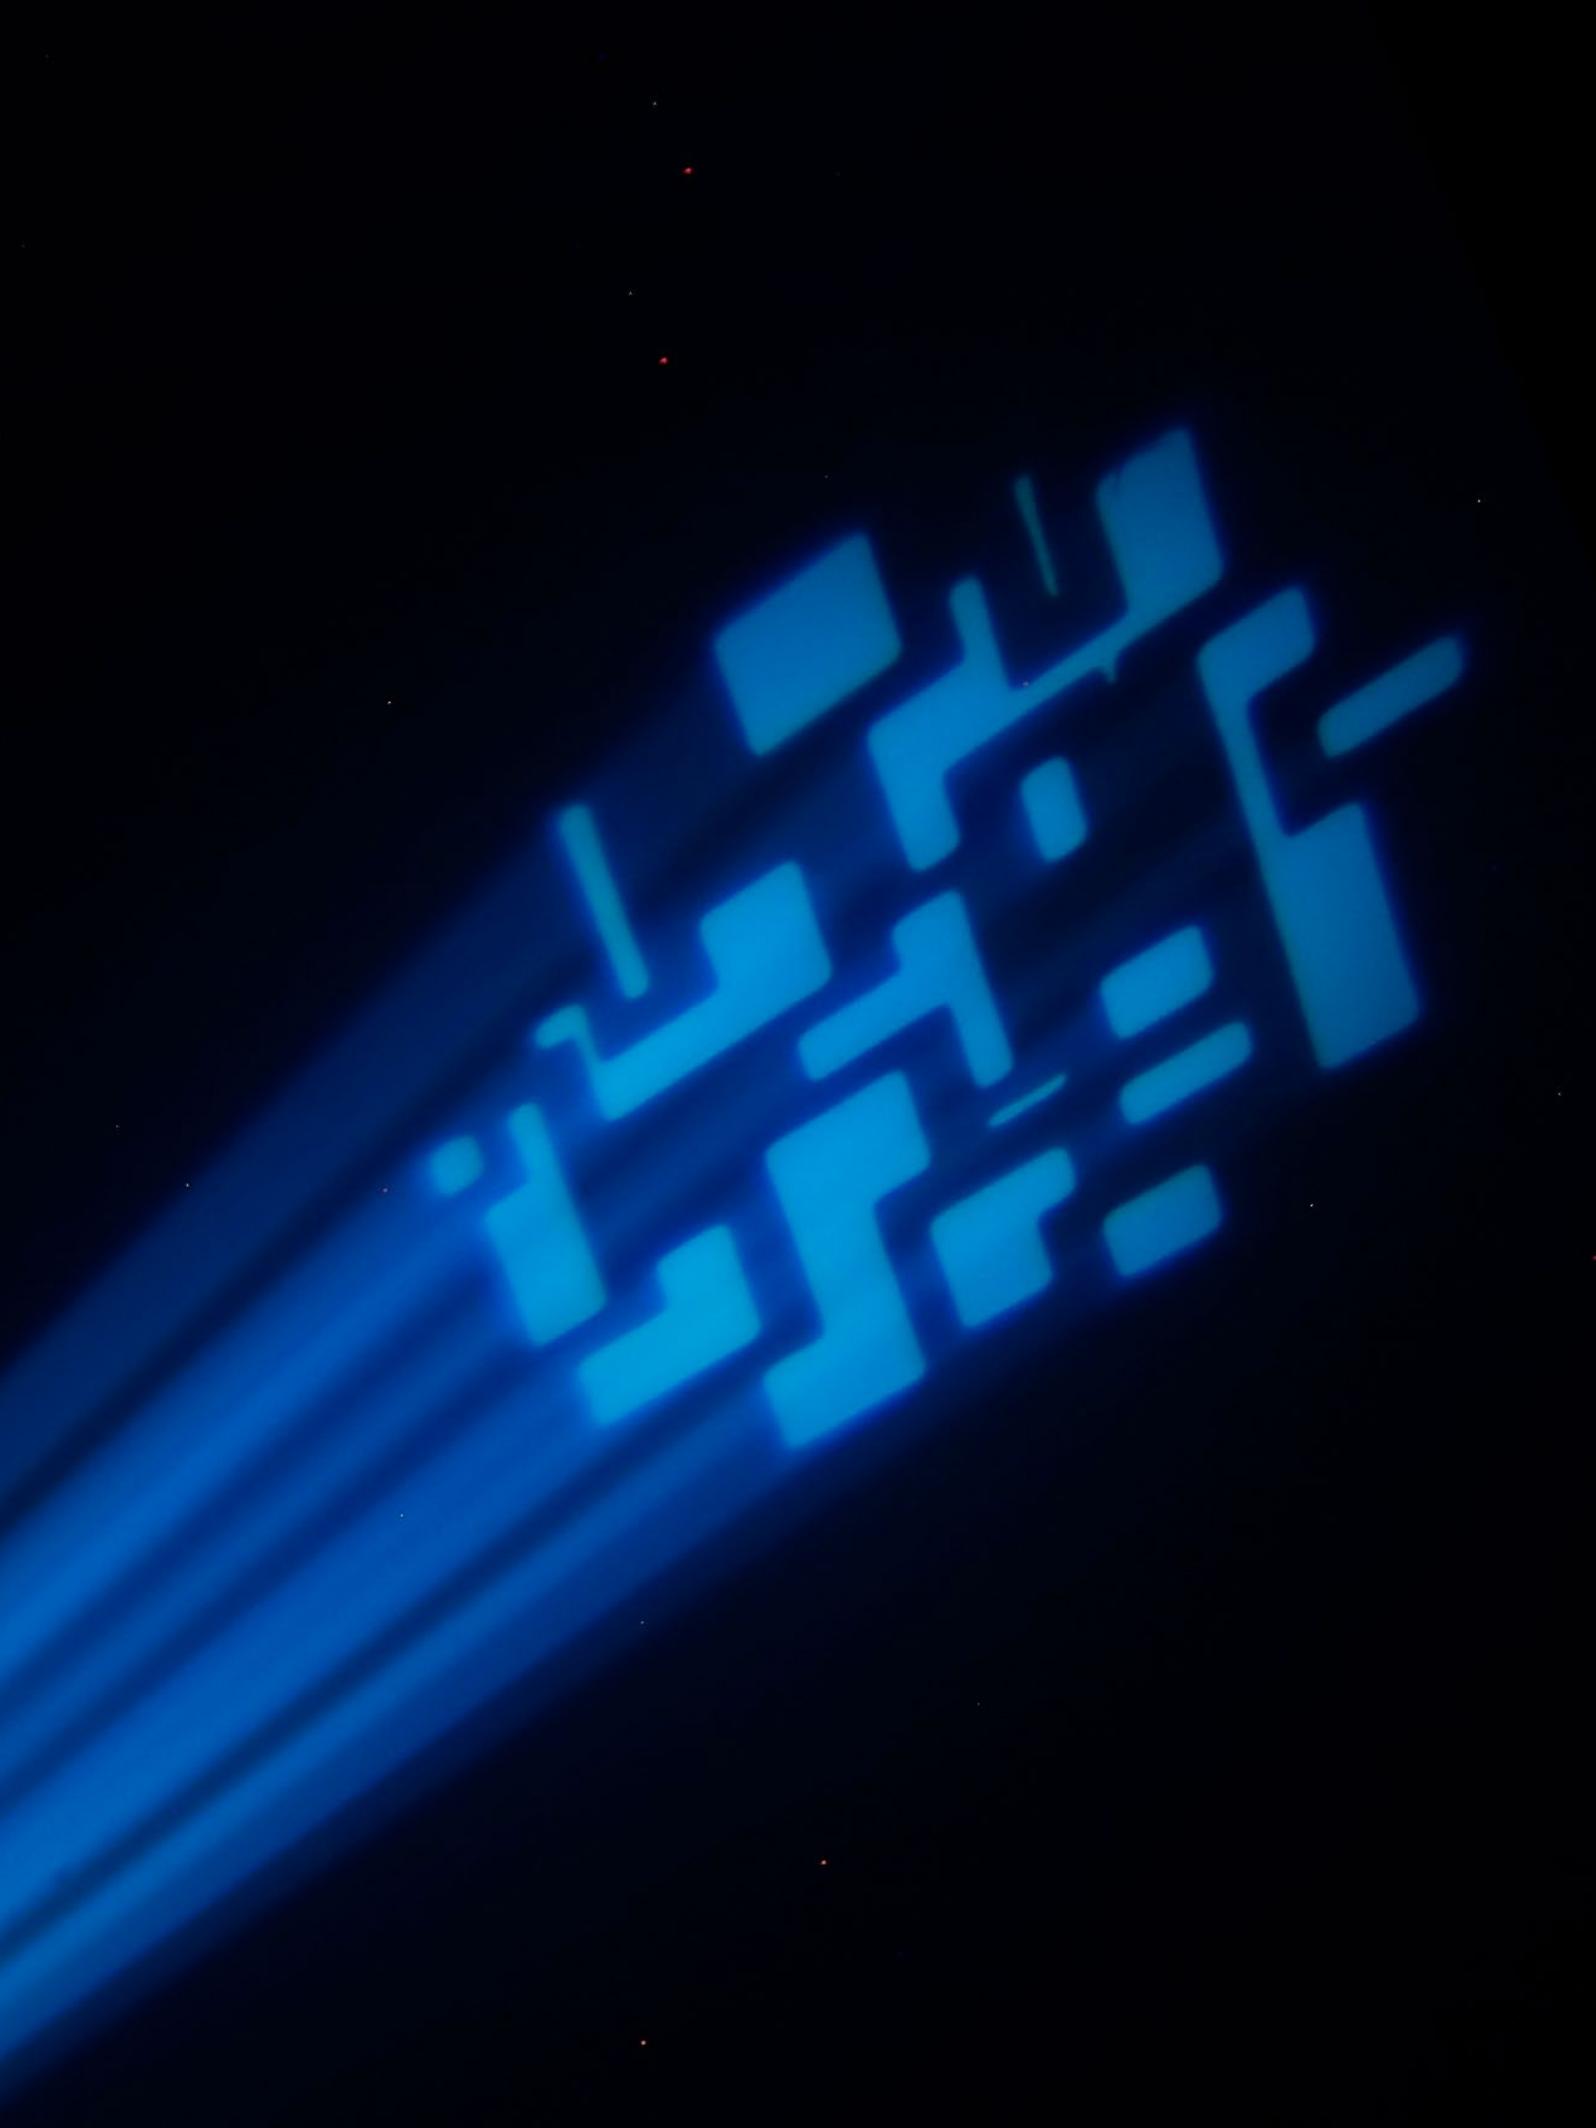

NEW



## NANO SPOT 300

LED MINI MOVING HEAD 30 W

- ▶ Miniature moving head with single 30W LED
- ▶ 540 x 230 pan and tilt
- ▶ Colour wheel with red, orange, yellow, green, blue, cyan and purple filters
- ▶ Gobo wheel with 7 gobos
- ▶ 7 lightshow presets
- ▶ Dimmer and strobe effects
- ▶ 3 DMX modes plus standalone, master and slave operation
- ▶ 4 function keys + display for manual control
- ▶ Built-in microphone for sound control
- ▶ IR remote control included
- ▶ Comes with omega bracket for multiple mounting options



## SPECIFICATIONS

Product Number:	CLNS300
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	White
Number Of LEDs:	1
LED Type:	30 W
Dispersion:	Beam 10° / Field 12 °
Number of gobos:	7 + open
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	5, 9, 11-Channel
DMX Functions:	Auto Programs , Colour Wheel , Dimmer , Gobo Wheel , Moving Speed , Pan/Tilt , Pan/Tilt Fine , Sound Programs , Strobe
PAN/TILT Movement:	540° / 230°

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Fuse:	F2AL / 250 V
Power Connector:	IEC Power Input And Output
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	24500lx @ 1m
Luminous flux:	650 lm
Dimensions (W x H x L):	165 x 280 x 155 mm
Weight:	3 kg





# **PIXEL MAPPING**

With dynamic single pixel control, Cameo's LED panels are a great choice for mapping alphabetic characters or numerals and an infinite variety of impressive lighting effects. The panels' smart interlocking systems enable secure, easy linking of multiple units to create large walls of vivid light.







# MATRIX PANEL 3 WW

5 x 5 LED MATRIX PANEL  
WITH SINGLE PIXEL CONTROL

- ▶ 5 x 5 LED Matrix Panel with single pixel control
- ▶ 25 x 3 W Warm White LEDs
- ▶ 4 DMX Modes, sound activation
- ▶ Master, slave and standalone capability
- ▶ Blinder, chase and Strobe effects
- ▶ Alphabetic character and numeral mapping
- ▶ 4 selectable dimming curves
- ▶ Noiseless and flicker-free operation
- ▶ Ultra flat enclosure
- ▶ Even more impressive in multiples

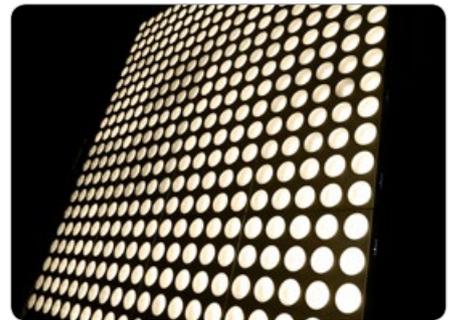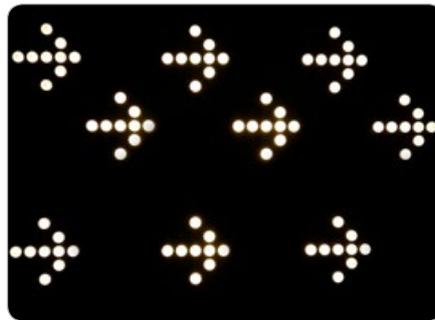

## SPECIFICATIONS

Product Number:	CLMP3WW
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	Warm White
Colour Temperature:	3,300 K
Number Of LEDs:	25
LED Type:	3 W Single LED
Dispersion:	40 °
Refresh Rate:	3,400 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5, 10, 28-Channel
DMX Functions:	Dimmer Fine, Master Dimmer, Auto Programs, Sound Programs, Stroboscope
Standalone Modes:	Master / Slave Mode, Music Control
Controls:	Enter, Mode, Down, Up

Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Fuse:	F5A / 250V
Operating Temperature:	10 - 40 °C
Power Connector:	Blue and White Power I/O
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	6100 lx @ 1m
Features:	LED MATRIX PANEL, Swivel Bracket, 2 x Omega Mounting, Security Lock Slot
Dimensions (W x H x D):	580 x 580 x 67 mm
Weight:	8 kg



# **THEATRE SPOTLIGHTS**

Designed especially for theatrical lighting, these fixtures are available with a choice of warm white or colourful RGBW LEDs. Cameo Theatre Spotlights feature precision plano-convex lenses, RDM capability and come with barn doors and a filter frame.



# TS 40 WW / TS 40 WW WH

## THEATRE SPOTLIGHT WITH PC LENS AND 40 WATT WARM WHITE LED

### FEATURES

- ▶ High-intensity warm white 40 W LED
- ▶ Plano-convex lens
- ▶ Continuously adjustable manual zoom with a beam angle of 14° to 38°
- ▶ RDM enabled
- ▶ 18,000 lux @ 1 m
- ▶ 3,200 K colour temperature
- ▶ CRI >90
- ▶ Flicker-free projection
- ▶ Rugged metal housing with convection cooling
- ▶ Includes rotatable wing limiter and colour filter frame



### SPECIFICATIONS

Product Number:	CLTS40WW / CLTS40WWWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White
Number Of LEDs:	1
Colour Temperature:	3.200 K
CRI:	>90
LED Type:	Warm White 40 W / 60 W
Refresh Rate:	1,200 MHz / 3,600 MHz
Flash Rate Strobe:	1 - 20 Hz
Dispersion:	(Beam) 14° - 38° / (Field) 20° - 48 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	3-Channel
DMX Functions:	Dimmer, Dimmer Curve, Strobe
Wireless DMX:	No

Standalone Modes:	Static
Controls:	down, Enter, mode, up
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Die Cast Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	18,000 lx @ 1 m
Luminous Flux:	1,570 lm
Operating Temperature:	0 - 40 °C
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg
Accessories (included):	Barndoor



## TS 60 W RGBW / TS 60 W RGBW WH

### THEATRE SPOTLIGHT WITH PC LENS AND 60W RGBW LED

#### FEATURES

- ▶ High-intensity 60 W RGBW COB LED
- ▶ Plano-convex lens
- ▶ Continuously adjustable manual zoom with beam angle of 9° to 41°
- ▶ RDM enabled
- ▶ 19,800 lux @ 1 m
- ▶ Flicker-free projection
- ▶ Rugged metal housing
- ▶ Includes rotatable wing limiter and colour filter frame



#### SPECIFICATIONS

Product Number:	CLTS60WRGBW / CLTS60WRGBWWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	1
CRI:	90
LED Type:	60 W
Refresh Rate:	3,600 MHz
Flash Rate Strobe:	1 - 20 Hz
Dispersion:	(Beam) 9° - 41° / (Field) 16° - 49°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	5-Channel
DMX Functions:	Colour Macro, CTO, Dimmer, RGBW, Strobe
Wireless DMX:	No
Standalone Modes:	Auto Programs, Slave Mode, Sound Control, Static

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LC Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	65 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Die Cast Metal
Cabinet Colour:	Black / White
Cooling:	Temperature-controlled fan
Illuminance:	19,800 lx @ 1 m
Luminous Flux:	910 lm
Operating Temperature:	0 - 40 °C
Dimensions (W x H x L):	145 x 205 x 240 mm
Weight:	3.6 kg
Accessories (included):	Barndoor



# **LED STANDARD PAR CANS**

The LED PAR, which is a headlight with an aluminium case, is right for everyone in need of headlights which are sturdy and run on little energy. PAR headlights have some kind of history. The first headlights of that type (PAR is the abbreviation for parabolic aluminium reflector) were sold in the 1950's. Nowadays, they are offered with light-emitting diodes (LEDs). You can adjust the intensity and colour of light with a digital multiplex (DMX), which is a common digital control program. The DMX is used in lighting to control dimmers, moving heads and many more.





# PAR 64 CAN RGBWA+UV 10 WBS / WPS

12 x 10W 6-IN-1 LED RGBWA+UV PAR LIGHT IN BLACK OR POLISHED HOUSING

- ▶ 12 x 10 W Ultra High Power 6 in 1 RGBWA+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet
- ▶ Flicker Free
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



## PHOTOMETRICAL DATA

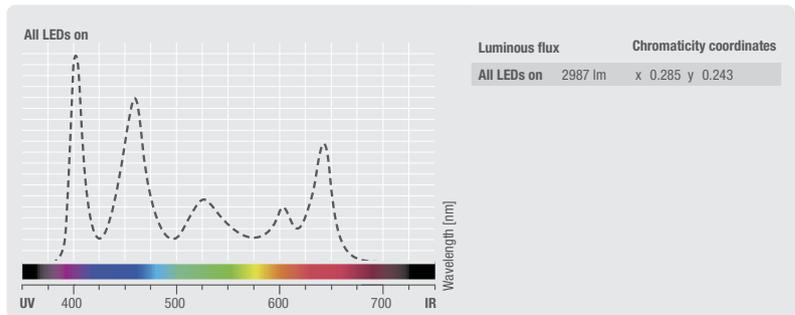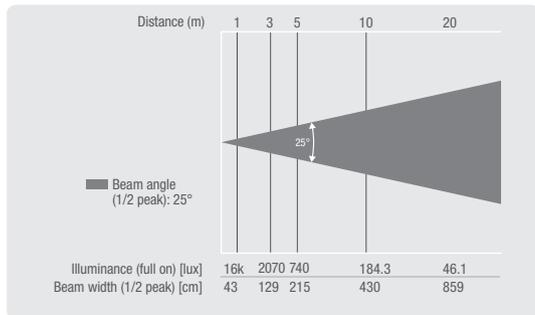

## SPECIFICATIONS

Product Number:	CLP64RGBWU10WBS / CLP64RGBWU10WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	12
LED Type:	10 W 6 in 1 colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Ch-1, 3-Ch-2, 2, 6, 9-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBWA+UV, Sound Control, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Macro, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	Backlit LCD
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	120 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Illuminance:	16,000 lx @ 1m
Dimensions (W x H x L):	260 x 280 x 300 mm
Weight:	3.7 kg





## PAR 64 CAN Q 8W BS / WPS

18 x 8W QUAD COLOUR LED RGBW PAR LIGHT IN BLACK OR POLISHED HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



### PHOTOMETRICAL DATA

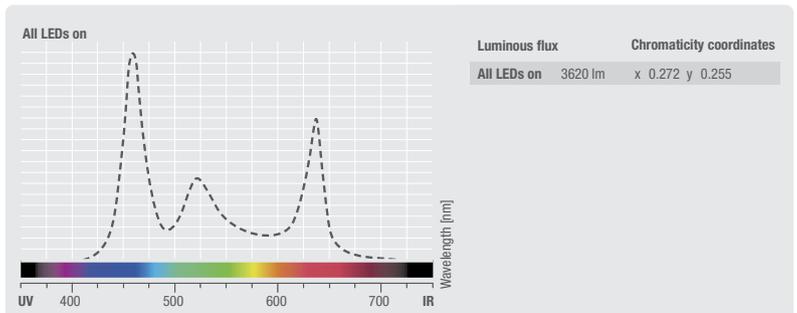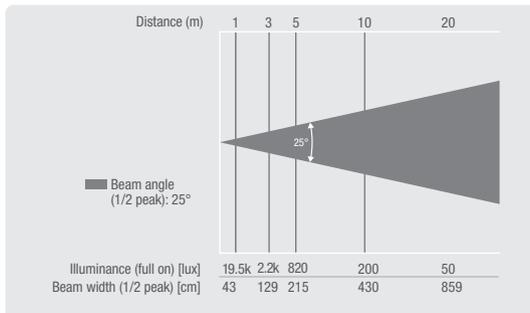

### SPECIFICATIONS

Product Number:	CLP64Q8WBS / CLP64Q8WPS
Product Type:	Indoor, PAR64
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBW, Sound Control, Colour Jump, Strobe

Standalone Modes:	Colour Fade, Colour Jump, Slave Mode , Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	180 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Dimensions (W x H x L):	260 x 270 x 305 mm
Weight:	3.5 kg





# PAR 56 Q 8 WBS / WPS

9 x 8 W QUAD COLOUR LED  
RGBW PAR LIGHT IN BLACK  
OR POLISHED HOUSING

- ▶ 9 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect vibrant and pastel colours
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double mounting bracket included in the delivery
- ▶ Rugged, compact aluminium housing



## PHOTOMETRICAL DATA

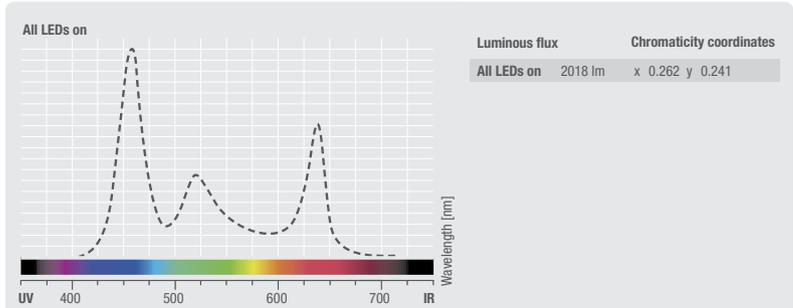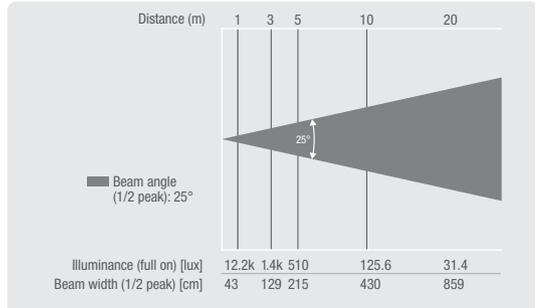

## SPECIFICATIONS

Product Number:	CLP56Q8WBS / CLP56Q8WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	9
LED Type:	8 W QUAD Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Ch-1, 3-Ch-2, 2, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBW, Sound Control, Colour Macro, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Macro, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60Hz
Power Consumption:	75 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Large Low-Speed Fan
Illuminance:	12,200 lx @ 1m
Dimensions (W x H x L):	235 x 240 x 260 mm
Weight:	2.7 kg





## PAR 64 CAN RGB 3W BS / WPS

36 x 3 W LED RGB PAR LIGHT  
IN BLACK OR POLISHED HOUSING

- ▶ 36 x 3 W Ultra High Power RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



### PHOTOMETRICAL DATA

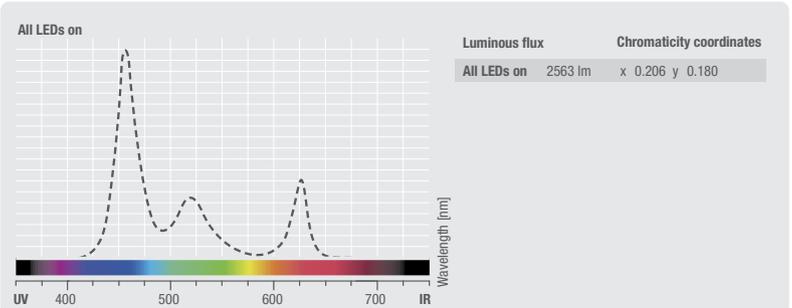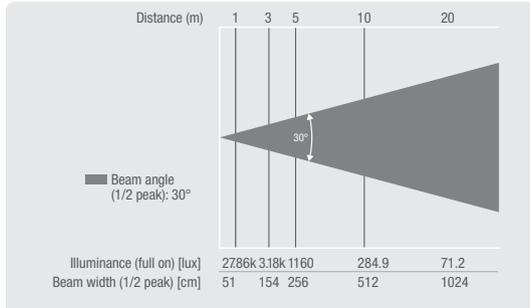

### SPECIFICATIONS

Product Number:	CLP64RGB3WBS / CLP64RGB3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	36
LED Type:	3 W
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Sound Control, Colour Jump, Strobe


Standalone Modes:	Colour Fade, Colour Jump, Slave Mode , Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	150 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Fan
Dimensions (W x H x L):	260 x 270 x 305 mm
Weight:	3.55 kg





# PAR 64 CAN TRI 3W BS / WPS

18 x 3 W TRI COLOUR LED RGB  
PAR LIGHT IN BLACK OR  
POLISHED HOUSING

- ▶ 18 x 3 W High Power TRI RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

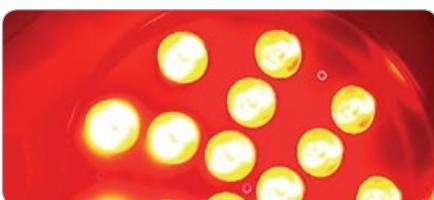

## PHOTOMETRICAL DATA

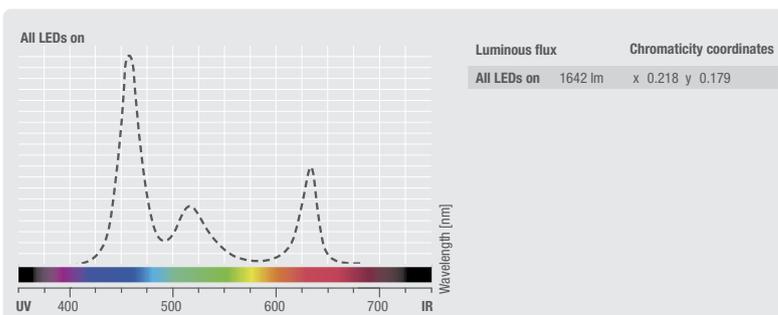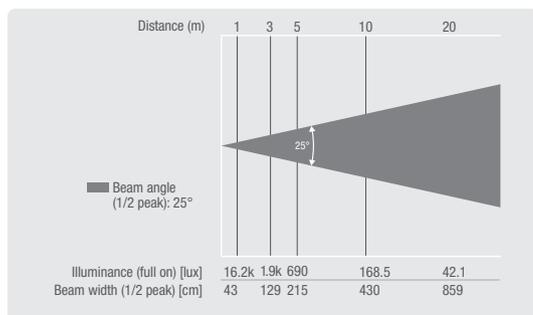

## SPECIFICATIONS

Product Number:	CLP64TRI3WBS / CLP64TRI3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	18
LED Type:	3 W TRI Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6 -Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Large Low-Speed Fan
Dimensions (W x H x L):	260 x 280 x 300 mm
Weight:	2.7 kg





## PAR 56 CAN 3W BS / WPS

9 x 3 W TRI COLOUR LED RGB  
PAR LIGHT IN BLACK OR  
POLISHED HOUSING

- ▶ 9 x 3 W High Power RGB TRI LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



### PHOTOMETRICAL DATA

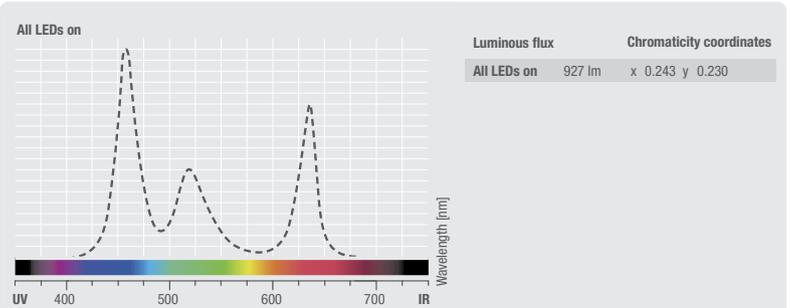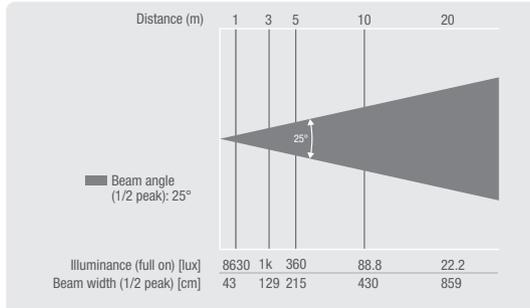

### SPECIFICATIONS

Product Number:	CLP56TRI3WBS / CLP56TRI3WPS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	9
LED Type:	3 W TRI Colour
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Strobe


Standalone Modes:	Colour Fade, Colour Change, Slave Mode , Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	230 x 250 x 260 mm
Weight:	2.7 kg





# PAR 64 CAN RGBA 10 BS / PS

177 x 10 MM LED RGBA PAR LIGHT  
IN BLACK OR POLISHED HOUSING

- ▶ Powerful 177 x 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

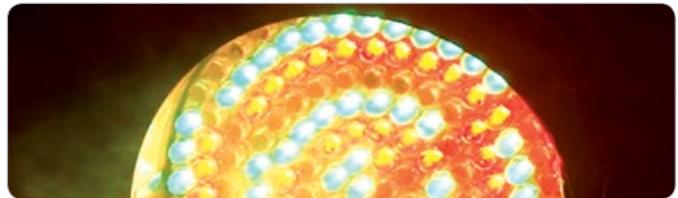

## PHOTOMETRICAL DATA

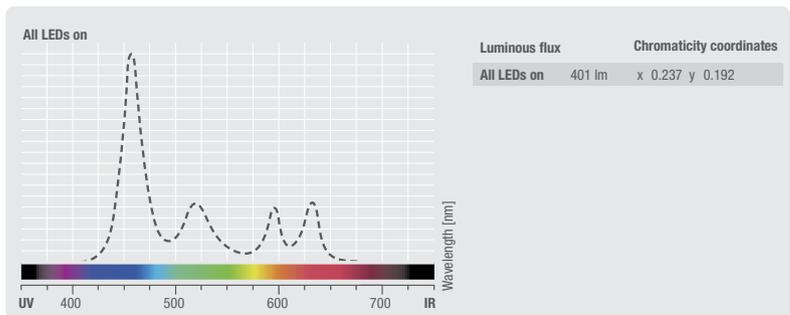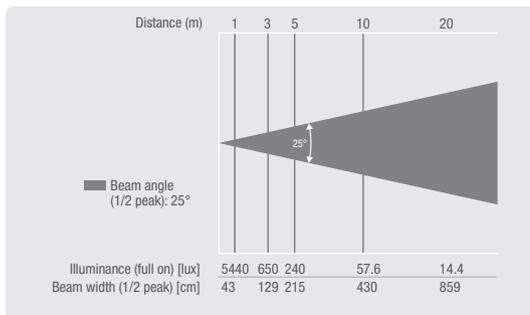

## SPECIFICATIONS

Product Number:	CLP64RGBA10BS / CLP64RGBA10PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBA
Number Of LEDs:	177
LED Type:	10 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	7 -Channel
DMX Functions:	Colour Fade, Master Dimmer, RGBA, Colour Jump, Strobe
Standalone Modes:	Colour Fade, Slave Mode, Colour Change, Sound Control, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	230 V AC
Power Consumption:	30 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	265 x 270 x 280 mm
Weight:	2.5 kg





## PAR 64 CAN 10 BS / PS

183 x 10 MM LED RGB PAR LIGHT  
IN BLACK OR POLISHED HOUSING

- ▶ Powerful 183 x 10 mm RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing

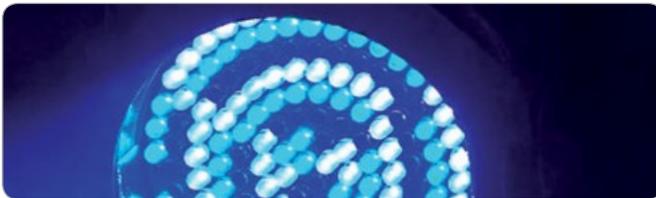

### PHOTOMETRICAL DATA

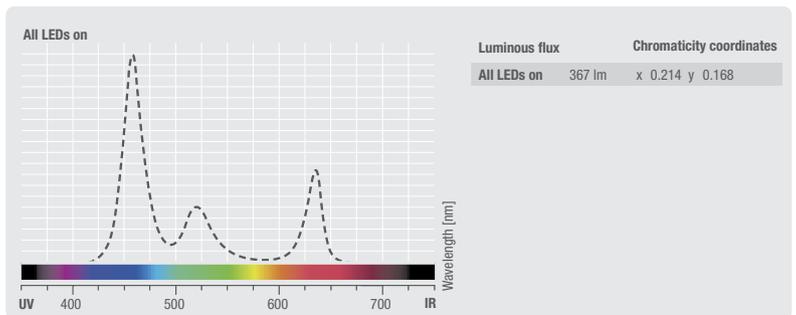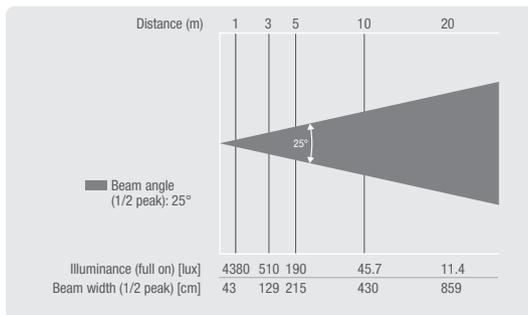

### SPECIFICATIONS

Product Number:	CLP64RGB10BS / CLP64RGB10PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	183
LED Type:	10 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe

Standalone Modes:	Colour Fade, Colour Change, Slave Mode, Sound Control, Static Colour
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	230 V AC
Power Consumption:	30 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	265 x 270 x 280 mm
Weight:	2.3 kg





# PAR 56 CAN RGB 10 BS / PS

108 x 10 MM LED RGB PAR LIGHT  
IN BLACK OR POLISHED HOUSING

- ▶ 108 powerful 10mm RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact aluminum housing



## PHOTOMETRICAL DATA

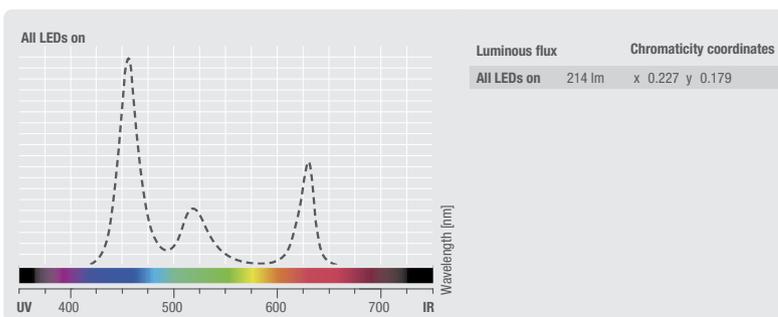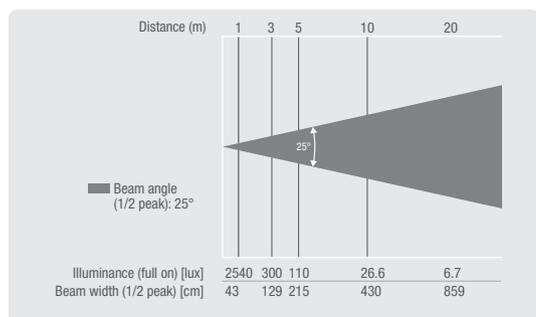

## SPECIFICATIONS

Product Number:	CLP56RGB10BS / CLP56RGB10PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	108
LED Type:	10 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe
Standalone Modes:	Colour Fade, Slave Mode, Colour Change, Sound Control, Slave Mode


Controls:	Mode, Value Up, Value Down
Indicators:	Program selection, LED Display
Operating Voltage:	230 V AC
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	230 x 250 x 260 mm
Weight:	1.7 kg





## PAR 56 CAN RGB 05 BS / PS

151 x 5 MM LED RGB PAR LIGHT  
IN BLACK OR POLISHED HOUSING

- ▶ 151 powerful RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the three buttons and LED Display
- ▶ Rugged compact aluminum housing

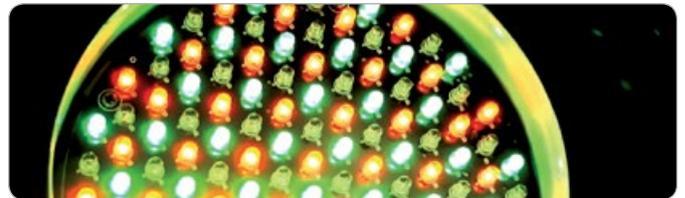

### PHOTOMETRICAL DATA

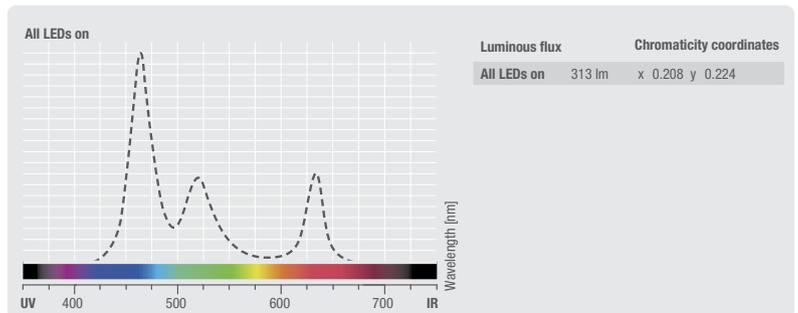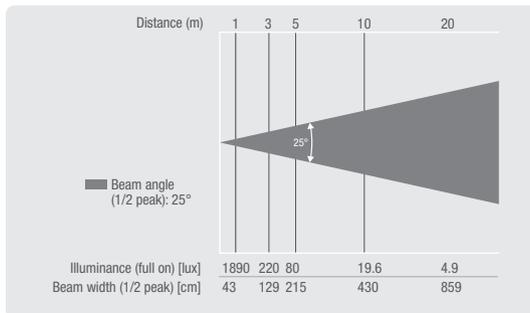

### SPECIFICATIONS

Product Number:	CLP56RGB05BS / CLP56RGB05PS
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	151 (51 x Red, 49 x Green, 51 x Blue)
LED Type:	5 mm
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, RGB, Colour Jump, Sound Control, Strobe

Standalone Modes:	Colour Fade, Colour Change, Slave Mode, Sound Control, Static Colour
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	230 V AC
Power Consumption:	20 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / Polished
Cooling:	Convection
Dimensions (W x H x L):	170 x 170 x 169 mm
Weight:	1.5 kg



# LED FLAT PARS

If you are used to the classic shape of PAR headlights, you will be surprised to find this version with slender design and low weight, easily to transport and flexibly to use. Compared with common light bulbs, the LED PAR Flat's LEDs are two to three times more efficient. They are extremely durable, they consume very little energy and therefore, they are the perfect choice. Discotheques, events, light shows – these are only some of the locations where LED PAR Flats are a typical choice. With an LED PAR Flat you will not be without light all of a sudden. After many years, their brightness might decrease, but you will probably not see the day when they finally go out. Another advantage of the LED PAR Flat is that they release very little heat.



Optional IR remote control





# FLAT PAR 1 RGBW IR / WH

7 x 4 W HIGH-POWER FLAT RGBW LED PAR LIGHT  
IN BLACK OR WHITE HOUSING WITH IR REMOTE CONTROL OPTION

## FEATURES

- ▶ High-power 7 x 4 W quad-color LED Flat Par Can
- ▶ Superb RGBW colour mixing
- ▶ Lens optimized for uniform light intensity
- ▶ Infrared remote control option
- ▶ Low Power Consumption
- ▶ 6 DMX Modes, master, slave and standalone operation plus IR remote option
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ Built-in microphone for sound activation
- ▶ 4-button LED Display for intuitive configuration
- ▶ Flat, compact ABS housing
- ▶ Twin brackets included

## PHOTOMETRICAL DATA

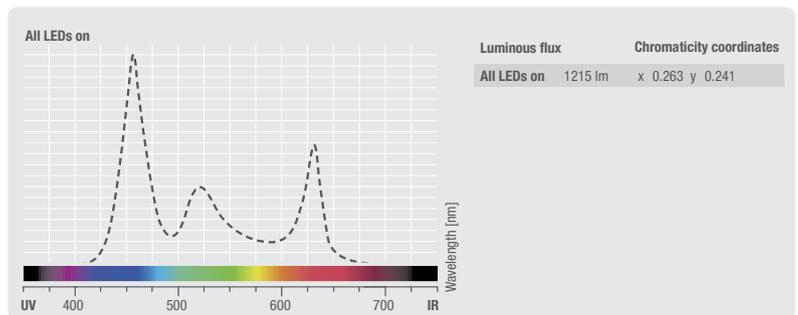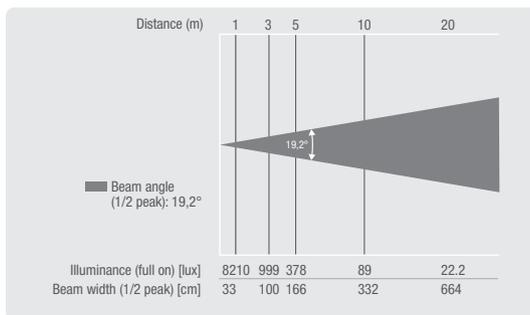


## SPECIFICATIONS

Product Number:	CLPFLAT1RGBWIR / CLPFLAT1RGBWIRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	7
LED Type:	4 W
Refresh Rate:	4,000 Hz
Dispersion:	19°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 8-Channel, 3 Ch-1, 3 Ch-2, 3 Ch-3
DMX Functions:	Colour Fade, Master Dimmer, Strobe, Colour Jump, Colour Macro, RGBW, Sound Control

Standalone Modes:	Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour, Strobe
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Power Connector:	IEC Power Input And Output
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	8,200 lx @ 1m
Dimensions (W x H x L):	180 x 175 x 115 mm
Weight:	1.2 kg



Optional IR remote control

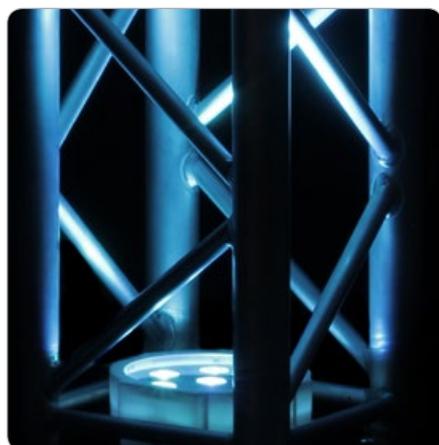

Also available as set in black or white



# FLAT PAR CAN TRI 3W IR / WH

7 x 3 W HIGH POWER TRI COLOUR FLAT LED RGB PAR LIGHT IN BLACK OR WHITE HOUSING

## FEATURES

- ▶ With IR-remote control capability
- ▶ Low Power Consumption
- ▶ Power in / out for daisy chaining up to 10 units
- ▶ Operated via DMX, in master/slave Mode or standalone Mode or optional IR-remote
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Flat and compact ABS housing

## PHOTOMETRICAL DATA

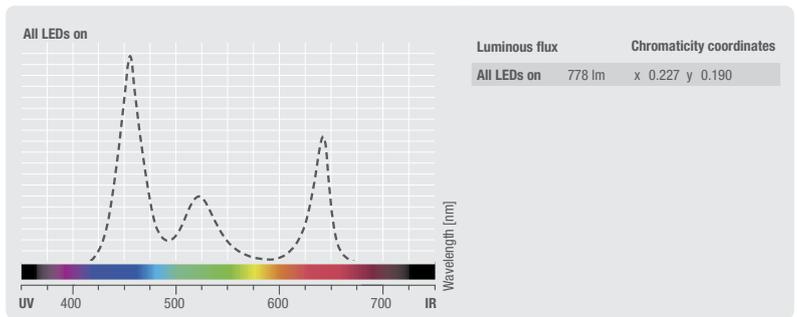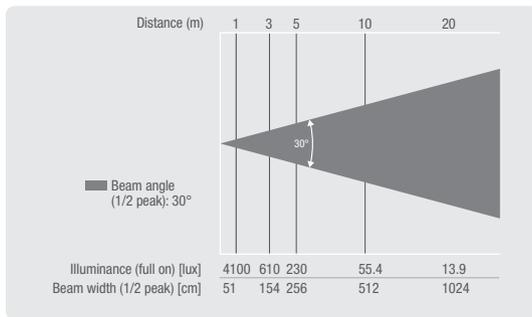



## SPECIFICATIONS

Product Number:	CLPFLAT1TRI3WIR / CLPFLAT1TRI3WIRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	7
LED Type:	3 W TRI Colour
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, Strobe, Colour Jump, RGBW, Sound Control
Standalone Modes:	Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Connector Female / Male
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	4,100 lx @ 1m
Dimensions (W x H x L):	180 x 175 x 115 mm
Weight:	1.2 kg



Optional IR remote control

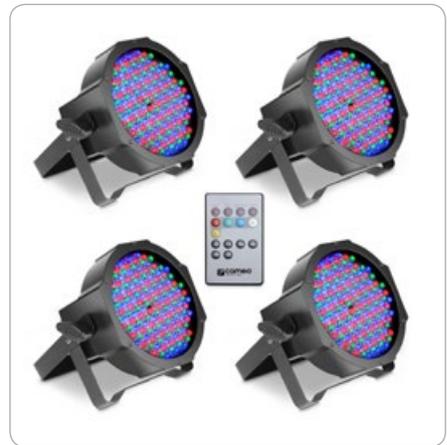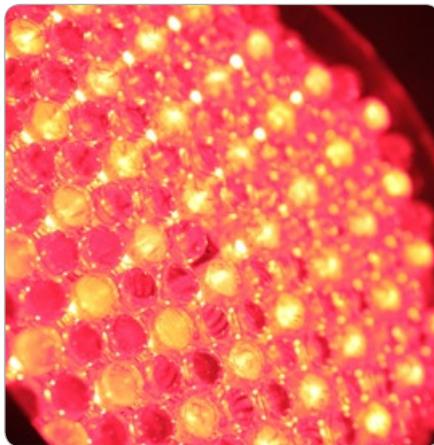

also available as set with IR remote



# FLAT PAR CAN RGB 10 IR / WH

144 x 10 MM FLAT LED RGB PAR SPOT LIGHT  
IN BLACK OR WHITE HOUSING WITH IR-REMOTE CONTROL CAPABILITY

## FEATURES

- ▶ Extremely bright Spotlight in a flat and lightweight ABS housing
- ▶ Optional IR-Remote available (CLPFLAT1REMOTE)
- ▶ Very low Power Consumption
- ▶ Power in / out for daisy chaining up to 10 units

## PHOTOMETRICAL DATA

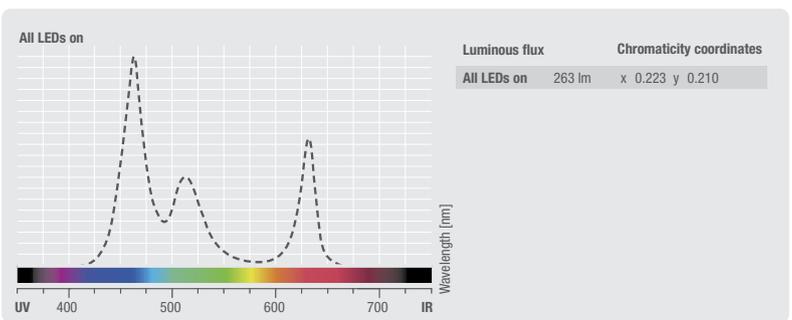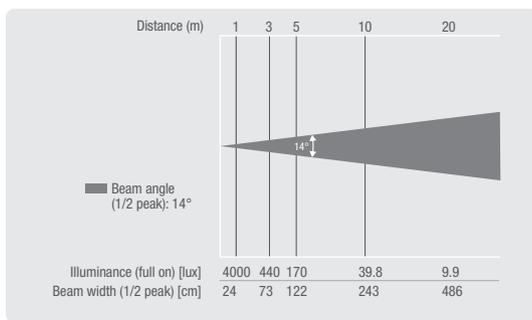

## SPECIFICATIONS

Product Number:	CLPFLAT1RGB10IR / CLPFLAT1RGB10IRSET1 / CLPFLAT1RGB10IRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	144 (48 x Red, 48 x Green, 48 x Blue)
LED Type:	10 mm
Dispersion:	14 °
DMX Input / Output:	XLR 3-Pin male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel
DMX Functions:	Colour Fade, Master Dimmer, Strobe, Colour Jump, RGB
Standalone Modes:	Colour Jump, Colour Macro, Colour Fade, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 – 60 Hz
Power Consumption:	15 W
Power Connector:	IEC Power Connector
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	4,000 lx @ 1m
Dimensions (W x H x L):	176 x 180 x 113 mm
Weight:	1.2 kg
Features:	IR Remote Control Optional



## FLAT PAR CAN 7 x 3W UV IR / WH

7 x 3 W HIGH POWER FLAT LED UV PAR LIGHT IN BLACK OR WHITE HOUSING





Optional IR remote control



- ▶ Infrared remote control capability
- ▶ Low Power Consumption
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ 3 DMX Modes, master, slave and standalone operation plus IR remote option
- ▶ 4-button LED Display for intuitive configuration
- ▶ Twin brackets included as standard
- ▶ Flat, compact ABS housing



### PHOTOMETRICAL DATA

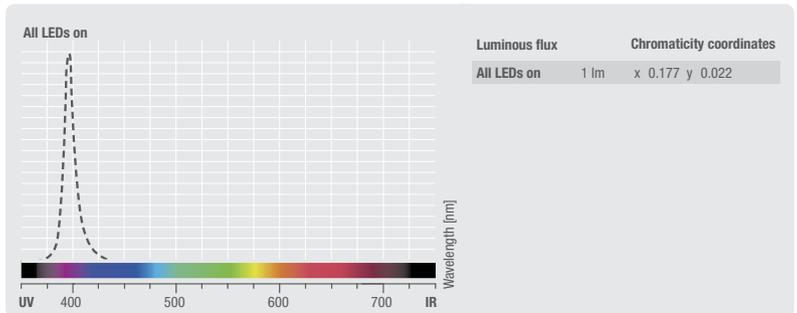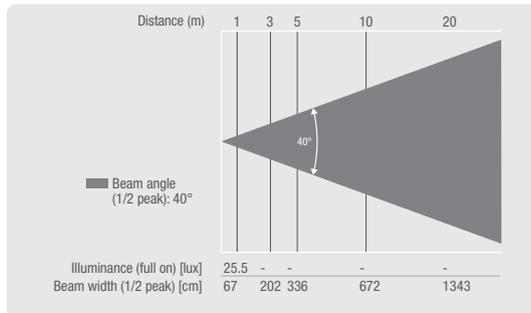

### SPECIFICATIONS

Product Number:	CLPFLAT1UVIR / CLPFLAT1UVIRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	UV
Number Of LEDs:	7
LED Type:	3 W
Dispersion:	40 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3-Channel
DMX Functions:	Master Dimmer, Strobe

Standalone Modes:	Slave Mode, Static Colour, Colour Change, Strobe
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	20 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Dimensions (W x H x L):	180 x 175 x 115 mm
Weight:	1.2 kg



Optional IR remote control



NEW

# FLAT 1 TW IR / FLAT 1 TW IR WH

7 x 4 W HIGH-POWER FLAT TUNABLE WHITE LED PAR LIGHT  
IN BLACK HOUSING WITH IR REMOTE CONTROL OPTION

## FEATURES

- ▶ High-power 7 x 4 W tunable white LED flat PAR can
- ▶ White colour temperature variable from 3,400 - 7,000 K
- ▶ Lens optimized for uniform light intensity
- ▶ Dimming with 4 selectable curves and halogen lamp-like or LED response
- ▶ 20 Hz high-speed strobe
- ▶ 4 DMX, automatic and sound control modes plus optional IR remote
- ▶ DMX and IEC power in and out for daisy chaining up to 10 units
- ▶ 4-button LED display for intuitive configuration
- ▶ Flat, compact ABS housing
- ▶ Low power consumption
- ▶ Twin brackets included



## SPECIFICATIONS

Product Number:	CLPFLAT1TWIR / CLPFLAT1TWRWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White/Cold White
Number Of LEDs:	7
LED Type:	4 W
Refresh rate:	3000Hz
Dispersion:	25 °
DMX Input / Output:	XLR 3-Pin male / XLR 3-Pin Female
DMX Mode:	2-channel, 1-channel, 7-channel, 3-channel
DMX Functions:	Dimmer, CW, Color Temperature (17 Presets), WW, strobe, Dimmer Response, Dimmer Curve (8 Presets)
Standalone Modes:	WW, strobe, CW, Color Temperature (17 Presets)

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 – 60 Hz
Power Consumption:	22 W
Power Connector:	IEC Power Connector
Housing Material:	ABS Plastic
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	6,000 lx @ 1m
Dimensions (W x H x L):	175 x 180 x 115 mm
Weight:	1.2 kg
Features:	IR Remote Control Optional



# **LED STUDIO PAR CANS**

The PAR lights thought further – that is the LED Studio PAR. LED PAR lights are extremely durable, consume very little energy and do not pollute the environment too much. Studios in which one part of the headlight is fixed are a common location for the LED Studio PAR. You can use them not only in photo studios or exhibitions - they are also the right choice for theatres and museums. The LED Studio PAR with a double bracket can also be used on the floor.





## Q-SPOT 15 RGBW / WH

COMPACT SPOT LIGHT WITH 15W RGBW LED  
IN BLACK OR WHITE HOUSING

### FEATURES


- ▶ Compact LED spot light with single 15 watt quad LED
- ▶ 2 additional lenses for Beam Angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for high definition colours and ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications
- ▶ Colour Temperature correction
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 5 Modes of DMX control, sound activation plus master, slave and standalone capability
- ▶ Infrared remote control included
- ▶ 4-button OLED Display for easy configuration
- ▶ convection cooling for noise-free performance

### PHOTOMETRICAL DATA

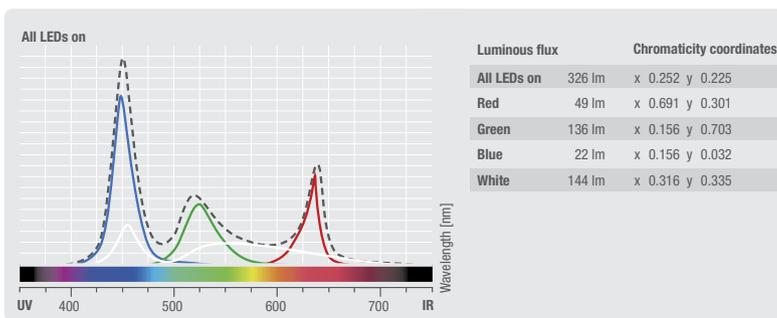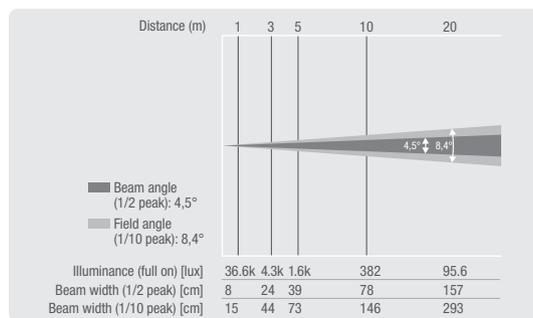

### SPECIFICATIONS

Product Number:	CLQS15RGBW (Black) CLQS15RGBWWH (White)	Standalone Modes:	Slave Mode, Sound Control, Auto Run, Colour Fade, Colour Jump, Colour Macro
Product Type:	LED PAR Lighting	Controls:	Enter, Mode, Value Up, Value Down
Type:	Indoor, PAR56	Indicators:	OLED Display
Colour Spectrum:	RGBW	Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Number Of LEDs:	1	Power Consumption:	18 W
LED Type:	15 W	Power Connector:	Blue and white power I / O
Refresh Rate:	3,600 Hz	Housing Material:	Metal
High Speed Strobe:	20 Hz	Cabinet Colour:	Black / White
Dispersion:	10°, 25°, 4.5°	Cooling:	Convection
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female	Illuminance:	24,000 lx @ 1 m
DMX Mode:	2, 4, 9-Channel, 3 Ch-1, 3 Ch-2	Dimensions (W x H x L):	89 x 89 x 172 mm
DMX Functions:	Colour Macro, Master Dimmer, RGBW, Colour Jump, Sound Control, Strobe	Weight:	1.2 kg

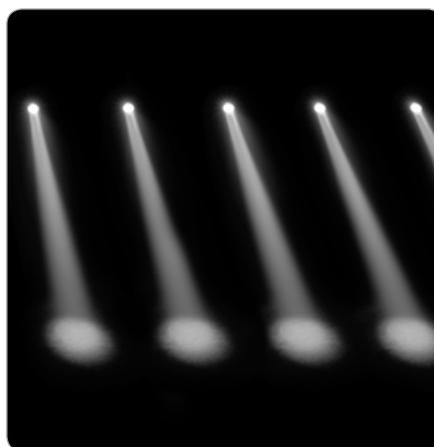



## Q-SPOT 15 W / WH

COMPACT SPOT LIGHT WITH 15W WARM WHITE LED IN BLACK OR WHITE HOUSING

### FEATURES

- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 3-Channel DMX control, sound activation plus master, slave and standalone capability
- ▶ 4-button OLED Display for easy configuration
- ▶ Convection cooling for noise-free performance
- ▶ Includes handheld for convenient infrared remote control
- ▶ Compact spot light with single high-power 15 watt Warm White LED
- ▶ 3 lenses for Beam Angles of 4.5°, 10° or 25°
- ▶ RDM capable
- ▶ 16-bit technology for ultra smooth dimming
- ▶ Flicker free, ideal for motion picture and TV applications

### PHOTOMETRICAL DATA

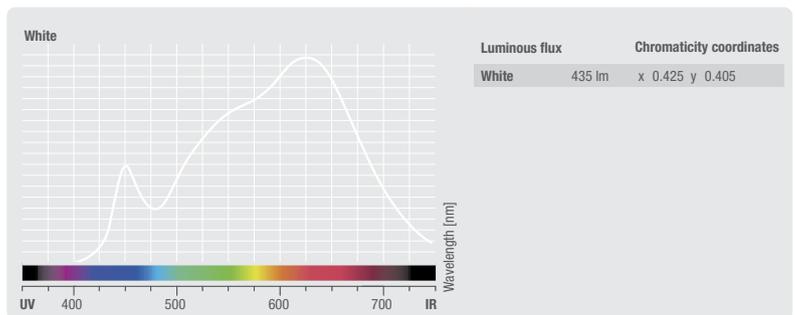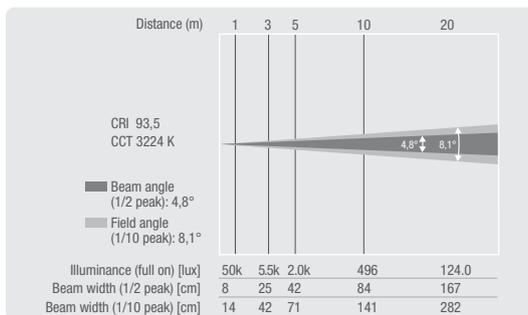

### SPECIFICATIONS

Product Number:	CLQS15W (black ) CLQS15WWH (White)
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	Warm White
Number Of LEDs:	1
LED Type:	15 W
Refresh Rate:	3,600 Hz
High Speed Strobe:	20 Hz
Dispersion:	4.5°, 25°, 10°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-Channel
DMX Functions:	Master Dimmer, Sound Control, Strobe
Standalone Modes:	Master / Slave Mode, Sound Control

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	OLED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	18 W
Power Connector:	Blue and white power I / O
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	5,500 lx @ 1 m
Luminous Flux:	435 lm
CRI:	94
Dimensions (W x H x L):	89 x 89 x 172 mm
Weight:	1.2 kg



Optional IR remote control



NEW

## Q-SPOT 40 RGBW

COMPACT SPOT LIGHT  
WITH 40W RGBW LED IN BLACK HOUSING

ALSO AVAILABLE  
WITH WARM WHITE  
OR COLD WHITE LED

### FEATURES

- ▶ Compact spotlight with single 40W Osram quad LED
- ▶ Custom lens with 4.5° beam spread for uniform light intensity
- ▶ Includes 2 replacement lenses for 10° or 25° beamangles
- ▶ RDM enabled
- ▶ 16-bit technology for highdefinition colours and ultra smooth dimming
- ▶ Flickerfree, ideal for motion picture and TV applications
- ▶ Colour temperature correction
- ▶ 4 high resolution dimming curves with adjustable response
- ▶ 5 modes of DMXcontrol, sound activation plus master, slave and standalone capability
- ▶ Infrared remote control available as accessory
- ▶ 4-button OLED display for easy configuration
- ▶ Convection cooling for noiseless performance



### SPECIFICATIONS

Product Number:	CLQS40RGBW (RGBW LED - black Housing) CLQS40RGBWWH (RGBW LED - white Housing) CLQS40WW (Warm-White LED - black Housing) CLQS40WWWH (Warm-White LED - white Housing) CLQS40CW (Cold-White LED - black Housing) CLQS40CWWH (Cold-White LED - white Housing)
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	40 W
Refresh Rate:	3,600 Hz
High Speed Strobe:	1 - 20 Hz
Dispersion:	25°, 10°, 4.5°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3-channel 1, 2-channel, 3-channel 2, 4- channel, 9-channel

DMX Functions:	Master dimmer, RGBW, sound control, strobe, colour jump, colour macro
Standalone Modes:	Auto run, slave mode, colour fade, colour jump, colour macro, sound control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	OLED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	55 W
Power Connector:	Blue Power Twist male
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	8900lx @ 3m, 58000lx @ 1m
Luminous Flux:	780 lm
Dimensions (W x H x L):	220 x 230 x 220 mm
Weight:	2,1 kg





## STUDIO PAR 64 CAN RGBWA + UV 12 W / WH

12 x 12W QUAD COLOUR LED RGBWA+UV  
PAR LIGHT IN BLACK OR WHITE HOUSING

### FEATURES

- ▶ 12 x 12 W Ultra High Power RGBWA+UV LEDs
- ▶ Highest flexibility for perfect mixing of solid and pastel colours to warm rich colours and ultra violet
- ▶ Flicker Free with a Refresh Rate of 3000Hz
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ 5 DMX Modes for flexible operation
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LC-display
- ▶ Original Neutrik PowerCON In- and Outputs
- ▶ Sturdy metal housing with double brackets

### PHOTOMETRICAL DATA

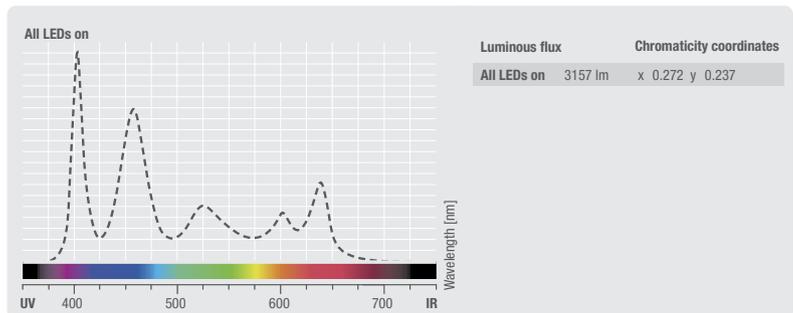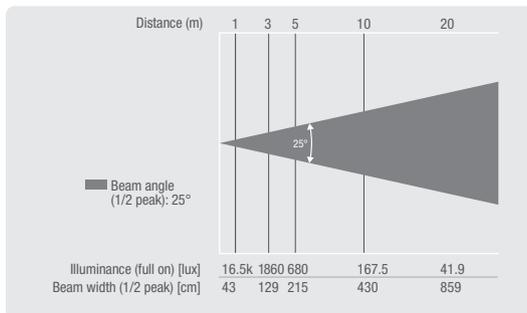

### SPECIFICATIONS

Product Number:	CLPST64RGBWAW12W / CLPST64RGBWAW12WWH
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBWA+UV
Number Of LEDs:	12
LED Type:	12 W 6 in 1 colour
Refresh Rate:	3,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6, 9-Channel
DMX Functions:	Colour Fade, Colour Jump, Strobe, RGBW+UV, Sound Control
Standalone Modes:	Colour Macro, Sound Control, Strobe, Colour Jump, Colour Fade, Slave Mode, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	Backlit LCD
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	110 W
Power Connector:	Neutrik PowerCON
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Fuse:	F2AL / 250 V
Dimensions (W x H x L):	130 x 220 x 255 mm (Dimensions without mounting bracket)
Weight:	4.9 kg
Features:	1m Power Cable With Neutrik PowerCON And Safety Plug Included, Double Bracket Included





# STUDIO PAR 64 CAN Q 8W

18 x 8W QUAD COLOUR LED RGBW PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master/slave mode or standalone mode
- ▶ Integrated microphone for sound control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double brackets included as standard
- ▶ Sturdy metal housing

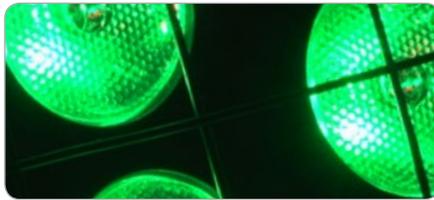

## PHOTOMETRICAL DATA

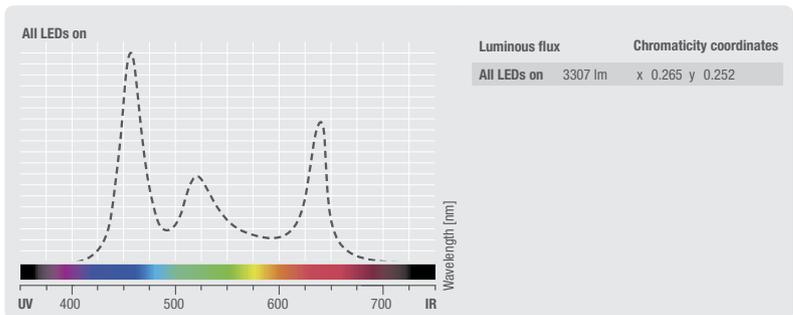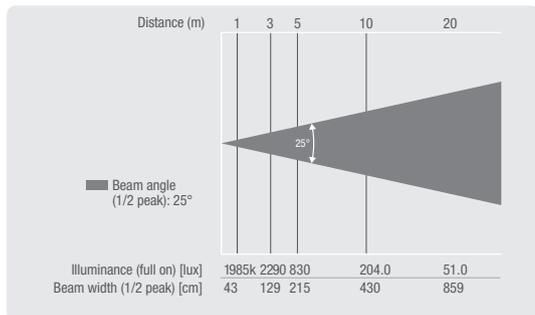

## SPECIFICATIONS

Product Number:	CLPST64Q8W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, Sound Control, Strobe,
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	170 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	5,000 lx @ 1m / 12,000 lx (+/- 10%)
Dimensions (W x H x L):	130 x 220 x 255 mm
Weight:	4.9 kg





## STUDIO PAR 64 CAN RGB A Q 8W

18 x 8W QUAD COLOUR LED RGB A  
PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 8 W Ultra High Power QUAD RGB A LEDs
- ▶ RGB A for warmer richer colours
- ▶ Operation via DMX, in Master/Slave mode or as a single projector
- ▶ Built-in microphone for sound-control mode
- ▶ Simple to operate using the four buttons and LED display
- ▶ Double bracket included
- ▶ Sturdy metal housing

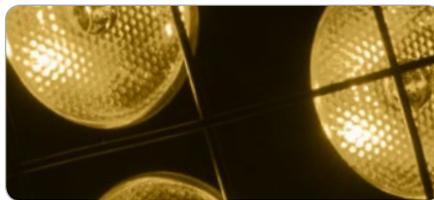

### PHOTOMETRICAL DATA

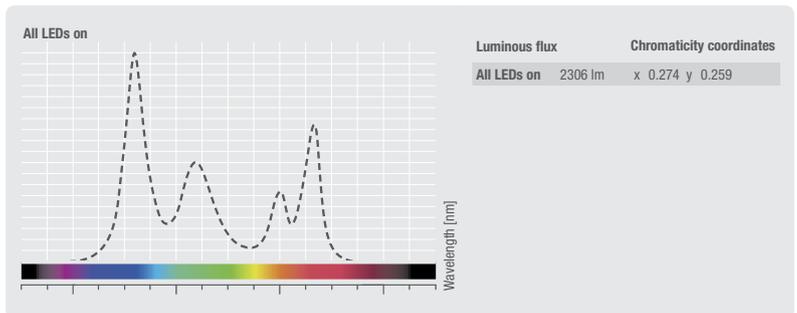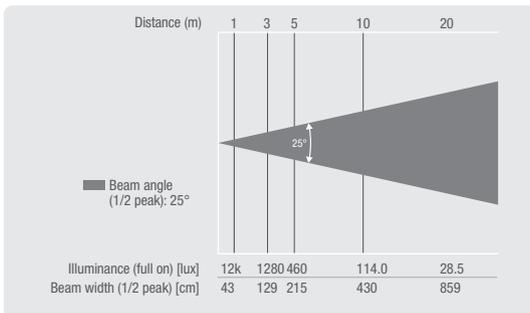

### SPECIFICATIONS

Product Number:	CLPST64RGB AQ8W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB A
Number Of LEDs:	18
LED Type:	8 W QUAD Colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 4, 7-Channel
DMX Functions:	Colour Fade, Master Dimmer, Sound Control, Strobe, Colour Jump, RGBW / RGB A
Standalone Modes:	Colour Fade, Colour Jump, Slave Mode, Sound Control, Static Colour

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	170 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Illuminance:	12,000lx (+/- 10%)
Dimensions (W x H x L):	130 x 220 x 255 mm
Weight:	4.9 kg





# STUDIO PAR 64 CAN TRI 3W

18 x 3 W TRI COLOUR LED RGB  
PAR LIGHT IN BLACK HOUSING

- ▶ 18 x 3 W High Power TRI RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Sturdy metal housing



## PHOTOMETRICAL DATA

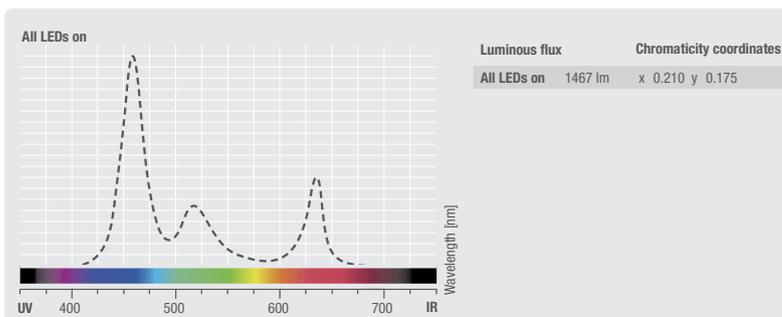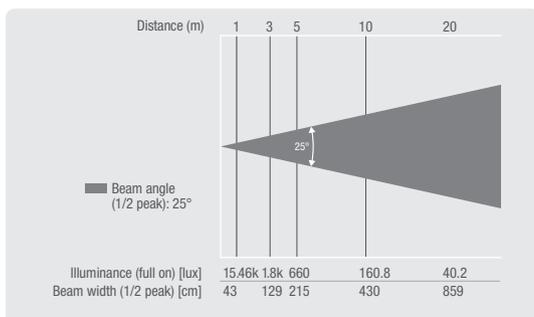

## SPECIFICATIONS

Product Number:	CLPST64TRI3W
Product Type:	LED PAR Lighting
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	18
LED Type:	3 W TRI Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6-Channel
DMX Functions:	Colour Fade, Colour Jump, Master Dimmer, Strobe
Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	230 x 220 x 260 mm
Weight:	4.9 kg





## STUDIO MINI PAR Q 8W / WH

7x8 W QUAD COLOUR LED PAR CAN RGBW IN BLACK OR WHITE HOUSING

- ▶ 7 x 8 W ultra high-power quad RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Operated via DMX, in master / slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



### PHOTOMETRICAL DATA

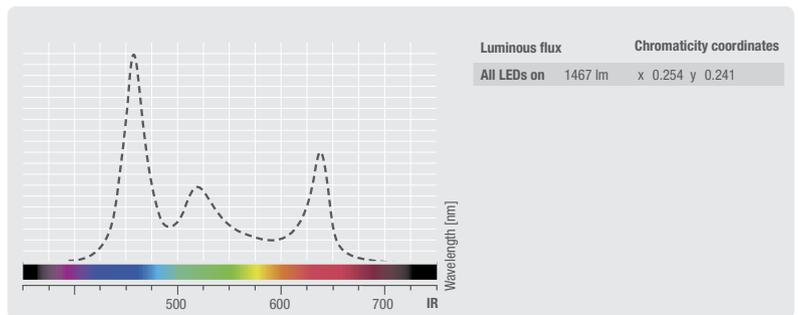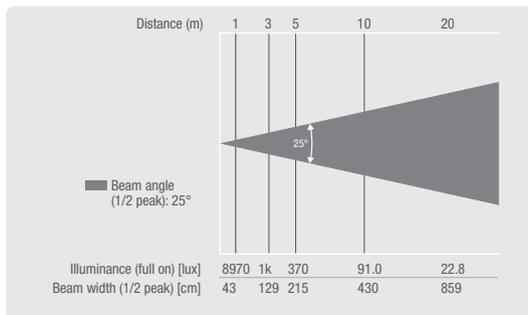

### SPECIFICATIONS

Product Number:	CLPSTMINIQ8W (Black Housing) CLPSTMINIQ8WWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	RGBW
Number Of LEDs:	7
LED Type:	8W quad colour
Refresh Rate:	5,000 Hz
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 4, 7-Channel
DMX Functions:	RGBW, Colour Fade, Colour Jump, Master Dimmer, Strobe

Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	60 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Aluminium
Cabinet Colour:	Black / White
Cooling:	Fan
Illuminance:	8,970 lx @ 1 m
Dimensions (W x H x L):	168 x 183 x 186 mm (Excluding Mounting Bracket)
Weight:	2 kg





# STUDIO MINI PAR COB 30W / WH

30W COB LED PAR CAN RGB  
IN WHITE OR BLACK HOUSING

- ▶ Powerful and innovative 30 W RGB COB LED
- ▶ For rich, natural colours and illumination uniformity
- ▶ Wide Beam Angle
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



## PHOTOMETRICAL DATA

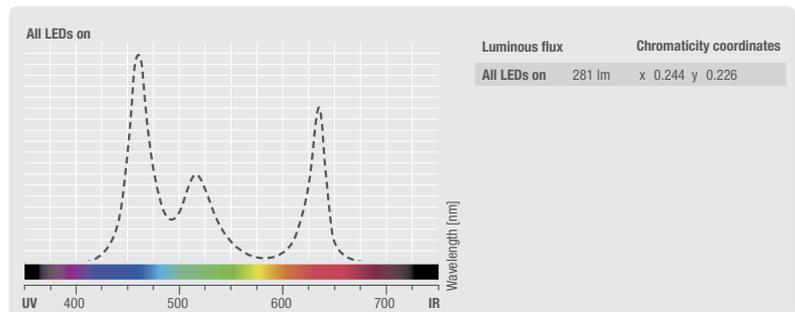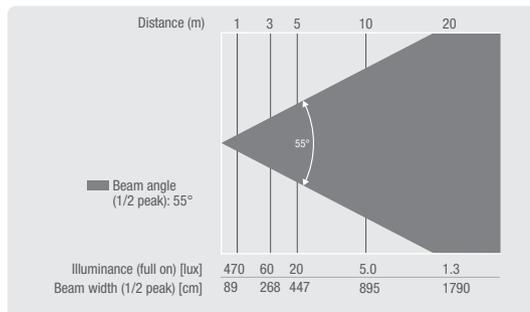

## SPECIFICATIONS

Product Number:	CLPSTMINICOB30W (Black Housing) CLPSTMINICOB30WWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	1
LED Type:	30 W COB
Dispersion:	55°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel
DMX Functions:	RGB, Colour Fade, Colour Jump, Master Dimmer, Strobe, Sound Control

Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode, Strobe
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	15 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Dimensions (W x H x L):	168 x 183 x 186 mm (Excluding Mounting Bracket)
Weight:	2.0 kg

## STUDIO MINI PAR Q 4W W / WH



7 x 4 W COLD WHITE/WARM WHITE LED PAR CAN IN WHITE OR BLACK HOUSING



- ▶ 7 x 4 W High Power Cold White/Warm White LEDs
- ▶ 17 presets for different Colour Temperatures
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing



### PHOTOMETRICAL DATA

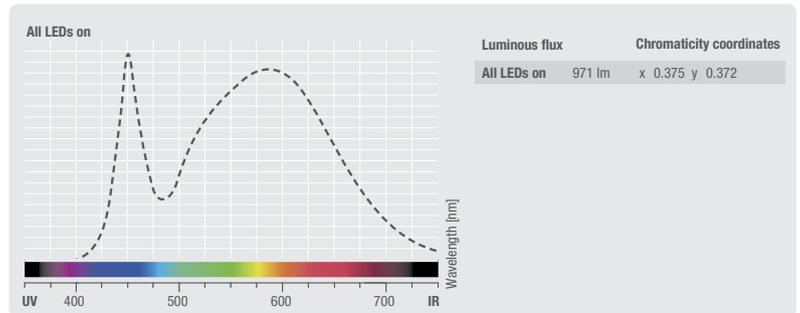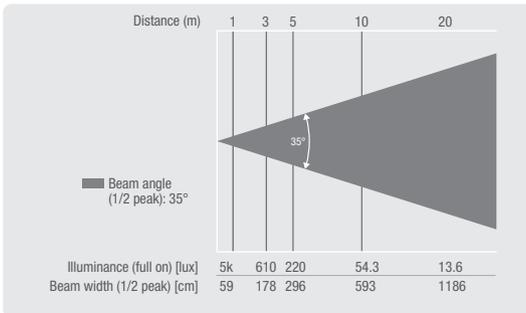

### SPECIFICATIONS

Product Number:	CLPSTMINIQ4WW (Black Housing) CLPSTMINIQ4WWWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	Warm White/Cold White
Number Of LEDs:	7
LED Type:	4 W 2 in 1 LED
Dispersion:	35°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5, 6-Channel
DMX Functions:	Cool White, Strobe, Color Temperature (17 Presets), Dimmer Curve (8 Presets), Master Dimmer, Warm White
Standalone Modes:	Static Colour, Slave Mode, Color Temperature (17 Presets)
Controls:	Mode, Value Up, Value Down, Enter

Indicators:	LED Display
Operating Voltage:	100 - 240 V
Power Consumption:	30 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Fan
Illuminance:	5,000 lx @ 1m
Colour Temperature:	3,200 - 6,500 K
Dimensions (W x H x L):	168 x 186 x 186 mm (Excluding Mounting Bracket)
Weight:	2.0 kg
Features:	IR Remote





# STUDIO MINI PAR TRI 3W / WH

7 x 3 W TRI-COLOUR LED PAR CAN RGB IN BLACK OR WHITE HOUSING

- ▶ 7 x 3 W high-power tri-RGB LEDs
- ▶ Low Power Consumption
- ▶ Operated via DMX, in master / slave Mode or standalone Mode
- ▶ Integrated microphone for sound control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Compact, sturdy metal housing




## PHOTOMETRICAL DATA

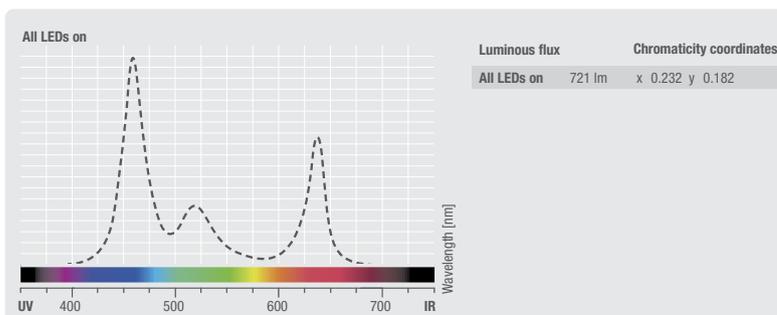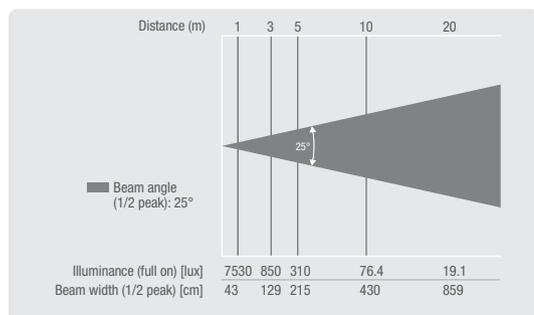

## SPECIFICATIONS

Product Number:	CLPSTMINITRI3W (Black Housing) CLPSTMINITRI3WWH (White Housing)
Product Type:	Studio Mini PAR
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	7
LED Type:	3W Tri-Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	6-Channel
DMX Functions:	RGB, Colour Fade, Colour Jump, Master Dimmer, Strobe

Standalone Modes:	Static Colour, Colour Change, Colour Fade, Sound Control, Slave Mode
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 250 V AC
Power Consumption:	15 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	7,530 lx @ 1 m
Dimensions (W x H x L):	168 x 183 x 186 mm (Excluding Mounting Bracket)
Weight:	2 kg

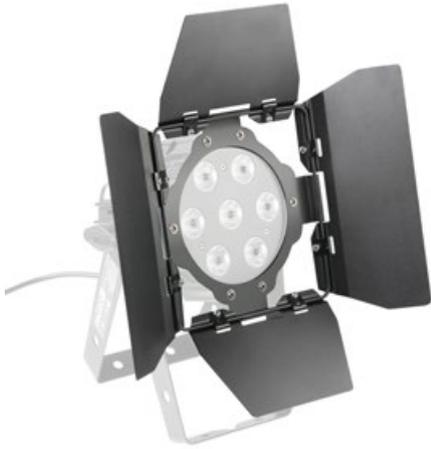


## STUDIO PAR BARN DOOR 1B

BARN DOORS FOR STUDIO MINI PAR BLACK / **0.4 KG**  
PRODUCT NO: CLPSTBARNDOOR1B



## STUDIO PAR BARN DOOR 1 WH

BARN DOORS FOR STUDIO MINI PAR WHITE / **0.4 KG**  
PRODUCT NO: CLPSTBARNDOOR1WH

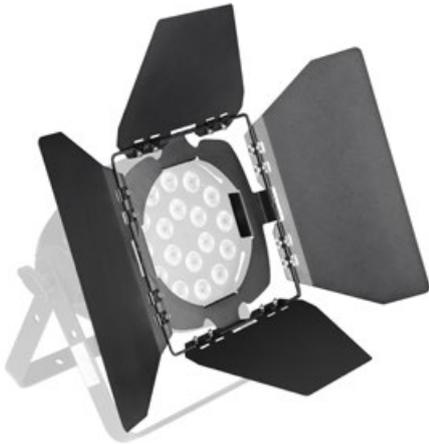

## STUDIO PAR BARN DOOR 2B

BARN DOORS FOR STUDIO PAR BLACK / **0.8 KG**  
PRODUCT NO: CLPSTBARNDOOR2B



## STUDIO PAR BARN DOOR 2 WH

BARN DOORS FOR STUDIO PAR WHITE / **0.8 KG**  
PRODUCT NO: CLPSTBARNDOOR2WH





# **LED OUTDOOR FIXTURES**

You can have creative lighting outdoors with our LED outdoor PAR cans. They are sturdy, have a high performance and are ideal to envision your lighting ideas. You cannot only light up the environment – you can also take care of it. The LED outdoor headlight has a very bright LED lamp, which is extremely durable and consumes very little energy (up to 95 percent less than a common light). The high quality LED outdoor cans are LED PAR devices. PAR is the abbreviation for parabolic aluminium reflector.





## OUTDOOR PAR TRI 12 IP 65

12 x 3 W TRI COLOUR  
LED OUTDOOR PAR CAN RGB IN BLACK HOUSING

### FEATURES


- ▶ 12 x 3 W High Power TRI RGB LEDs
- ▶ IP65 for outdoor use
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Double brackets included as standard
- ▶ Rugged compact metal housing

### PHOTOMETRICAL DATA

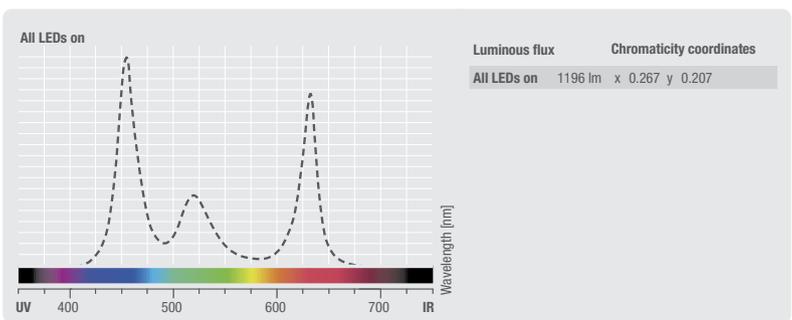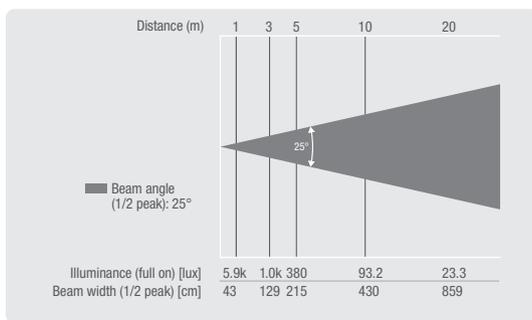

### SPECIFICATIONS

Product Number:	CLPSTTRI12IP	Controls:	Mode, Value Up, Value Down, Enter
Product Type:	LED PAR Lighting	Indicators:	LED Display
Type:	Outdoor	Operating Voltage:	110 V AC - 250 V AC
Colour Spectrum:	RGB	Power Consumption:	50 W
Number Of LEDs:	12	Power Connector:	3-Pin special connector, screwable
LED Type:	3W Tri-Colour	Housing Material:	Metal
Dispersion:	25°	Cabinet Colour:	Black
DMX Input / Output:	3-Pin special connector, screwable	Cooling:	Convection
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 6-Channel	Protection Class IP:	65
DMX Functions:	RGB, Colour Fade, Colour Jump, Strobe, Colour Macro	Illuminance:	5,900 lx @ 1m
Standalone Modes:	Static Colour, Colour Change, Colour Fade, Slave Mode	Dimensions (W x H x L):	203 x 203 x 193 mm (Excluding Mounting Bracket)
		Weight:	4.25 kg

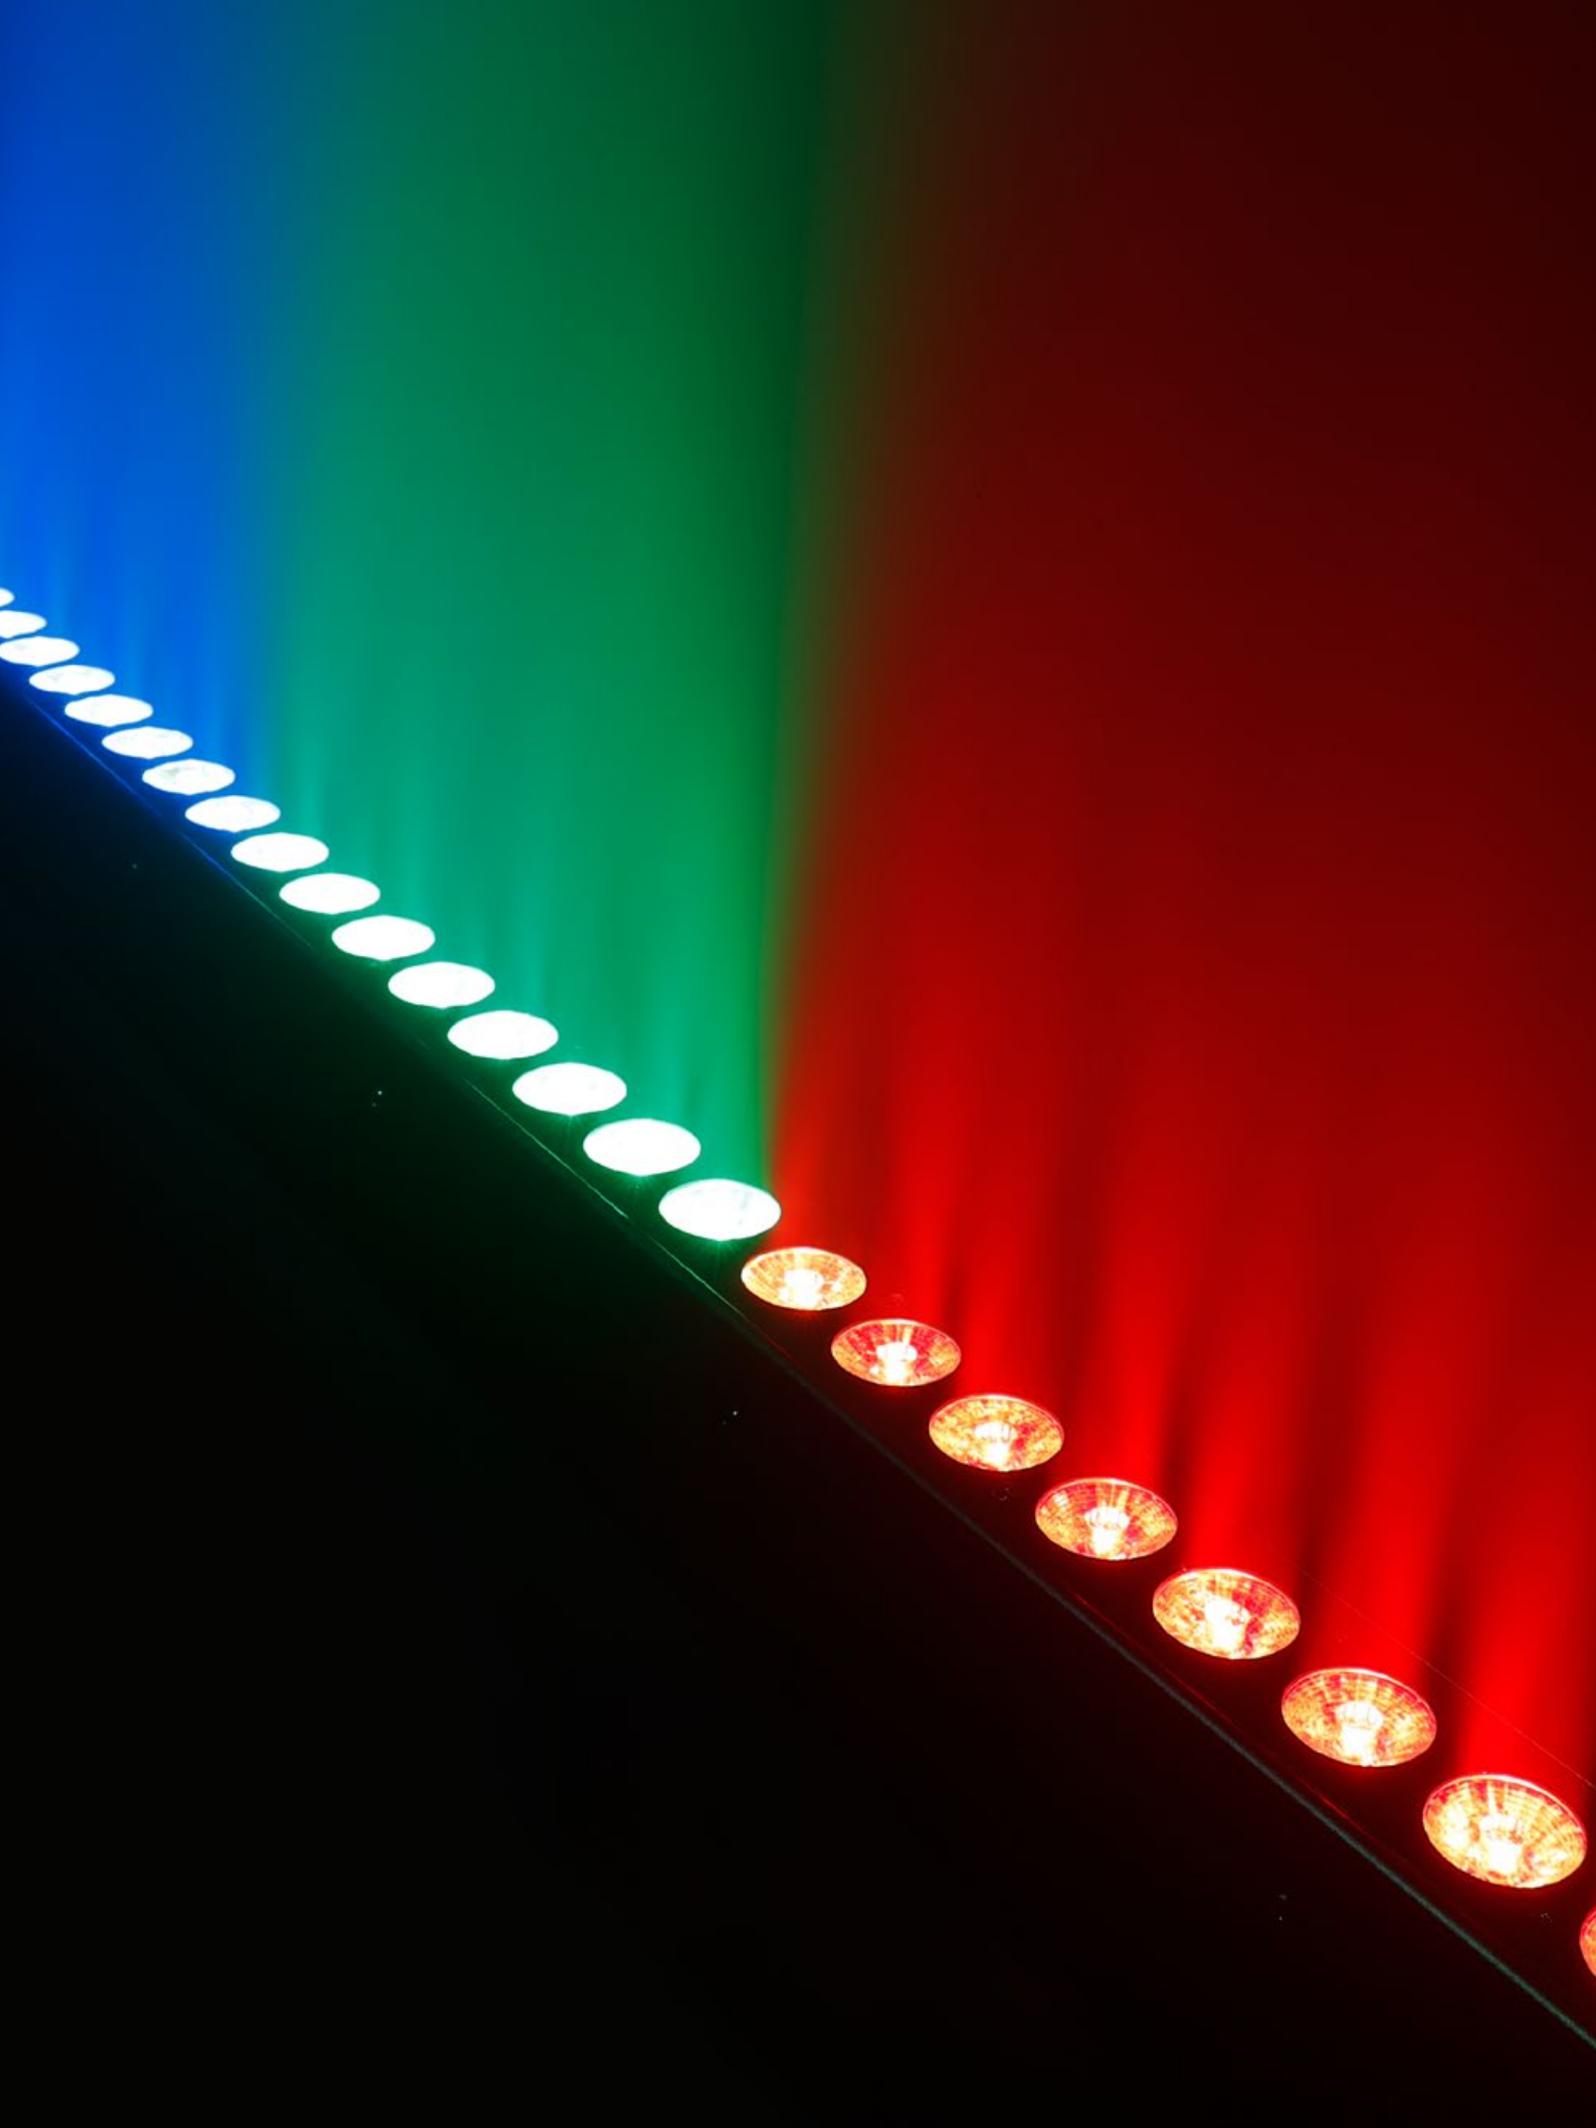

# LED BARS


Brilliant and bright colours come to you with the LED bar. Clubs, bars, shops and stages are the ideal locations for this slender instrument. It is also the perfect device for interesting light creations in your own rooms. LEDs have a high performance, are very bright and shed a strong and intense light. This is naturally also true for the LED bar. Common lamps can be used about 2.000 hours in lighting engineering. This is only a fraction of LED's longevity, which can bring you Approx. 50.000 hours of light. The LEDs in the LED bar consume only little energy. Additionally, they dissipate only little heat. This is not only good for your energy balance, it is also good for the environment.



# TRIBAR 200 IR / WH

12 x 3 W TRI LED BAR  
IN WHITE AND BLACK HOUSING  
WITH IR REMOTE CONTROL

- ▶ 12 ultra bright 3W Tri-LEDs
- ▶ 3 individually controllable quartets of LEDs for amazing chase effects
- ▶ Includes IR Remote Control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 Mode DMX control plus master, slave and Standalone Modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles
- ▶ Available in black or white

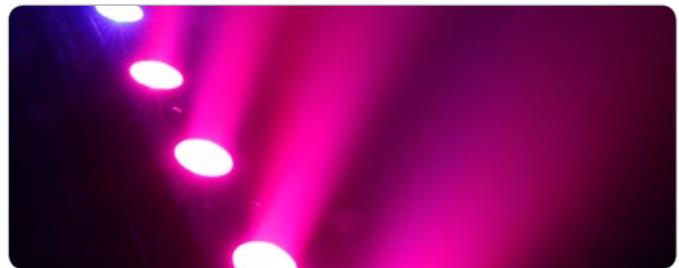

## SPECIFICATIONS

Product Number:	CLTRIBAR200IR (Black Housing) CLTRIBAR200IRWH (White Housing)
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	12
LED Type:	3 W TRI Colour
Dispersion:	20°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	3 Sections RGB, Colour Macro, Sound Control, Master Dimmer, 12 Programs, Strobe


Standalone Modes:	Strobe, 12 Programs, Colour Macro, Sound Control, Slave Mode, Auto Programs
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	2,340 lx @ 1 m
Dimensions (W x H x L):	1022 x 66 x 65 mm (Excluding Mounting Bracket)
Weight:	2.6 kg

# TRIBAR 400 IR

24 x 3 W TRI LED BAR  
IN BLACK HOUSING WITH  
IR REMOTE CONTROL



- ▶ 24 ultra bright 3W Tri-LEDs
- ▶ 3 individually controllable octets of LEDs
- ▶ Includes IR Remote Control with batteries
- ▶ Convection cooling for noiseless operation
- ▶ 5 Mode DMX control plus master, slave and Standalone Modes
- ▶ Built-in microphone for sound control
- ▶ Backlit display with 4 function keys for easy manual operation
- ▶ IEC mains input and output for serial connection
- ▶ Rugged metal enclosure with roping eye and universal mounting angles

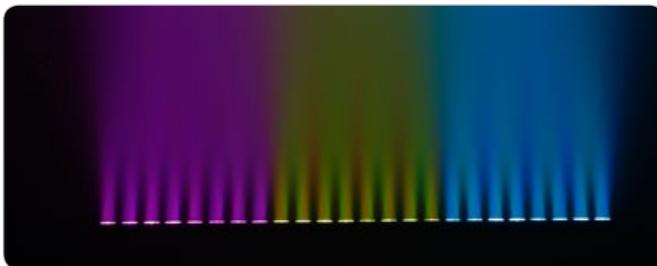

## SPECIFICATIONS

Product Number:	CLTRIBAR400IR
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGB
Number Of LEDs:	24
LED Type:	3 W TRI Colour
Dispersion:	20°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	3 Sections RGB, Colour Macro, Sound Control, Master Dimmer, 12 Programs, Strobe
Standalone Modes:	Strobe, 12 Programs, Colour Macro, Sound Control, Slave Mode, Auto Programs

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	2,340 lx @ 1m
Dimensions (W x H x L):	1022 x 66 x 65 mm (Excluding Mounting Bracket)
Weight:	2.6 kg



# UVBAR 200 IR

12 x 3 W UV LED BAR  
IN BLACK HOUSING WITH  
IR REMOTE CONTROL

- ▶ UV bar with convenient infrared remote control
- ▶ 12 brilliant 3 watt UV LEDs with 65° Beam Angle
- ▶ Convection cooling for noiseless operation
- ▶ DMX control, master, slave and Standalone Modes
- ▶ Strobe and dimming effects
- ▶ Stiff, rugged metal enclosure with 2 roping eyes
- ▶ Comes with universal mounting angles for optimum alignment



## SPECIFICATIONS

Product Number:	CLUVBAR200IR
Product Type:	LED Bars
Type:	Indoor, Washer
Colour Spectrum:	RGB
Number Of LEDs:	12
LED Type:	3 W UV
Dispersion:	65°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2-Channel
DMX Functions:	Master Dimmer, Strobe, Dimmer
Standalone Modes:	Strobe, Sound Control, Master Dimmer


Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	1022 x 66 x 67 mm (Excluding Mounting Bracket)
Weight:	2.3 kg



## BAR 10 RGBA / WH

252 x 10 MM LED RGBA  
COLOUR BAR IN BLACK  
AND WHITE HOUSING

- ▶ 252 powerful, long-life 10 mm RGBA LEDs
- ▶ RGBA for warm, rich colour mixing
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Can be operated in one block or separately in 4 equal blocks
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Universal Mounting Brackets included
- ▶ Rugged slim metal housing

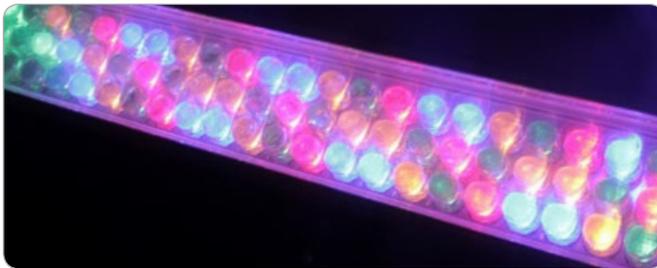

### SPECIFICATIONS

Product Number:	CLBARL10RGBA (Black Housing) CLBARL10RGBAWH (White Housing)
Product Type:	LED Bars
Type:	Indoor
Colour Spectrum:	RGBA
Number Of LEDs:	252
LED Type:	10 mm
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 6, 19-Channel
DMX Functions:	Colour Fade, Colour Jump, Colour Macro, Master Dimmer, RGBA, Strobe

Standalone Modes:	Auto Run, Colour Change, Colour Fade, Sound Control, Slave Mode, Static Colour
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	110 V AC - 250 V AC
Power Consumption:	40 W
Power Connector:	Power Cord With Safety Plug (Type E / CEE 7/7)
Housing Material:	Metal
Cabinet Colour:	Black / White
Dimensions (W x H x L):	1018 x 63 x 87 mm (Excluding Mounting Bracket)
Weight:	2.5 kg





## BAR 10 RGB IR / WH

252 x 10 MM LED RGB  
COLOUR BAR BLACK WITH  
IR REMOTE CONTROL


- ▶ 252 luminous, long-lasting 10 mm RGB LEDs
- ▶ RGB for warmer, richer colours
- ▶ Operating in one block or separately in 3 equal blocks
- ▶ Supplied with IR remote control
- ▶ Operation via DMX, in Master/Slave Mode or as a single projector
- ▶ Built-in microphone for sound-control Mode
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing with universal Mounting Brackets
- ▶ Power input and output jacks for serial connection



### SPECIFICATIONS

Product Number:	CLBAR10RGBIR (Black) / CLBAR10RGBIR WH (White)
Product Type:	Washer
Colour Spectrum:	RGB
Number Of LEDs:	252
LED Type:	10 mm
Dispersion:	30 °
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-2, 2, 9, 12-Channel
DMX Functions:	Colour Macro, Sound Control, RGB, Program, Strobe
Standalone Modes:	Auto Run, Colour Macro, Sound Control, Slave Mode, 12 Programs

Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black / White
Cooling:	Convection
Illuminance:	2,340 lx @ 1m
Dimensions (W x H x L):	1018 x 63 x 87 mm
Weight:	2.5 kg

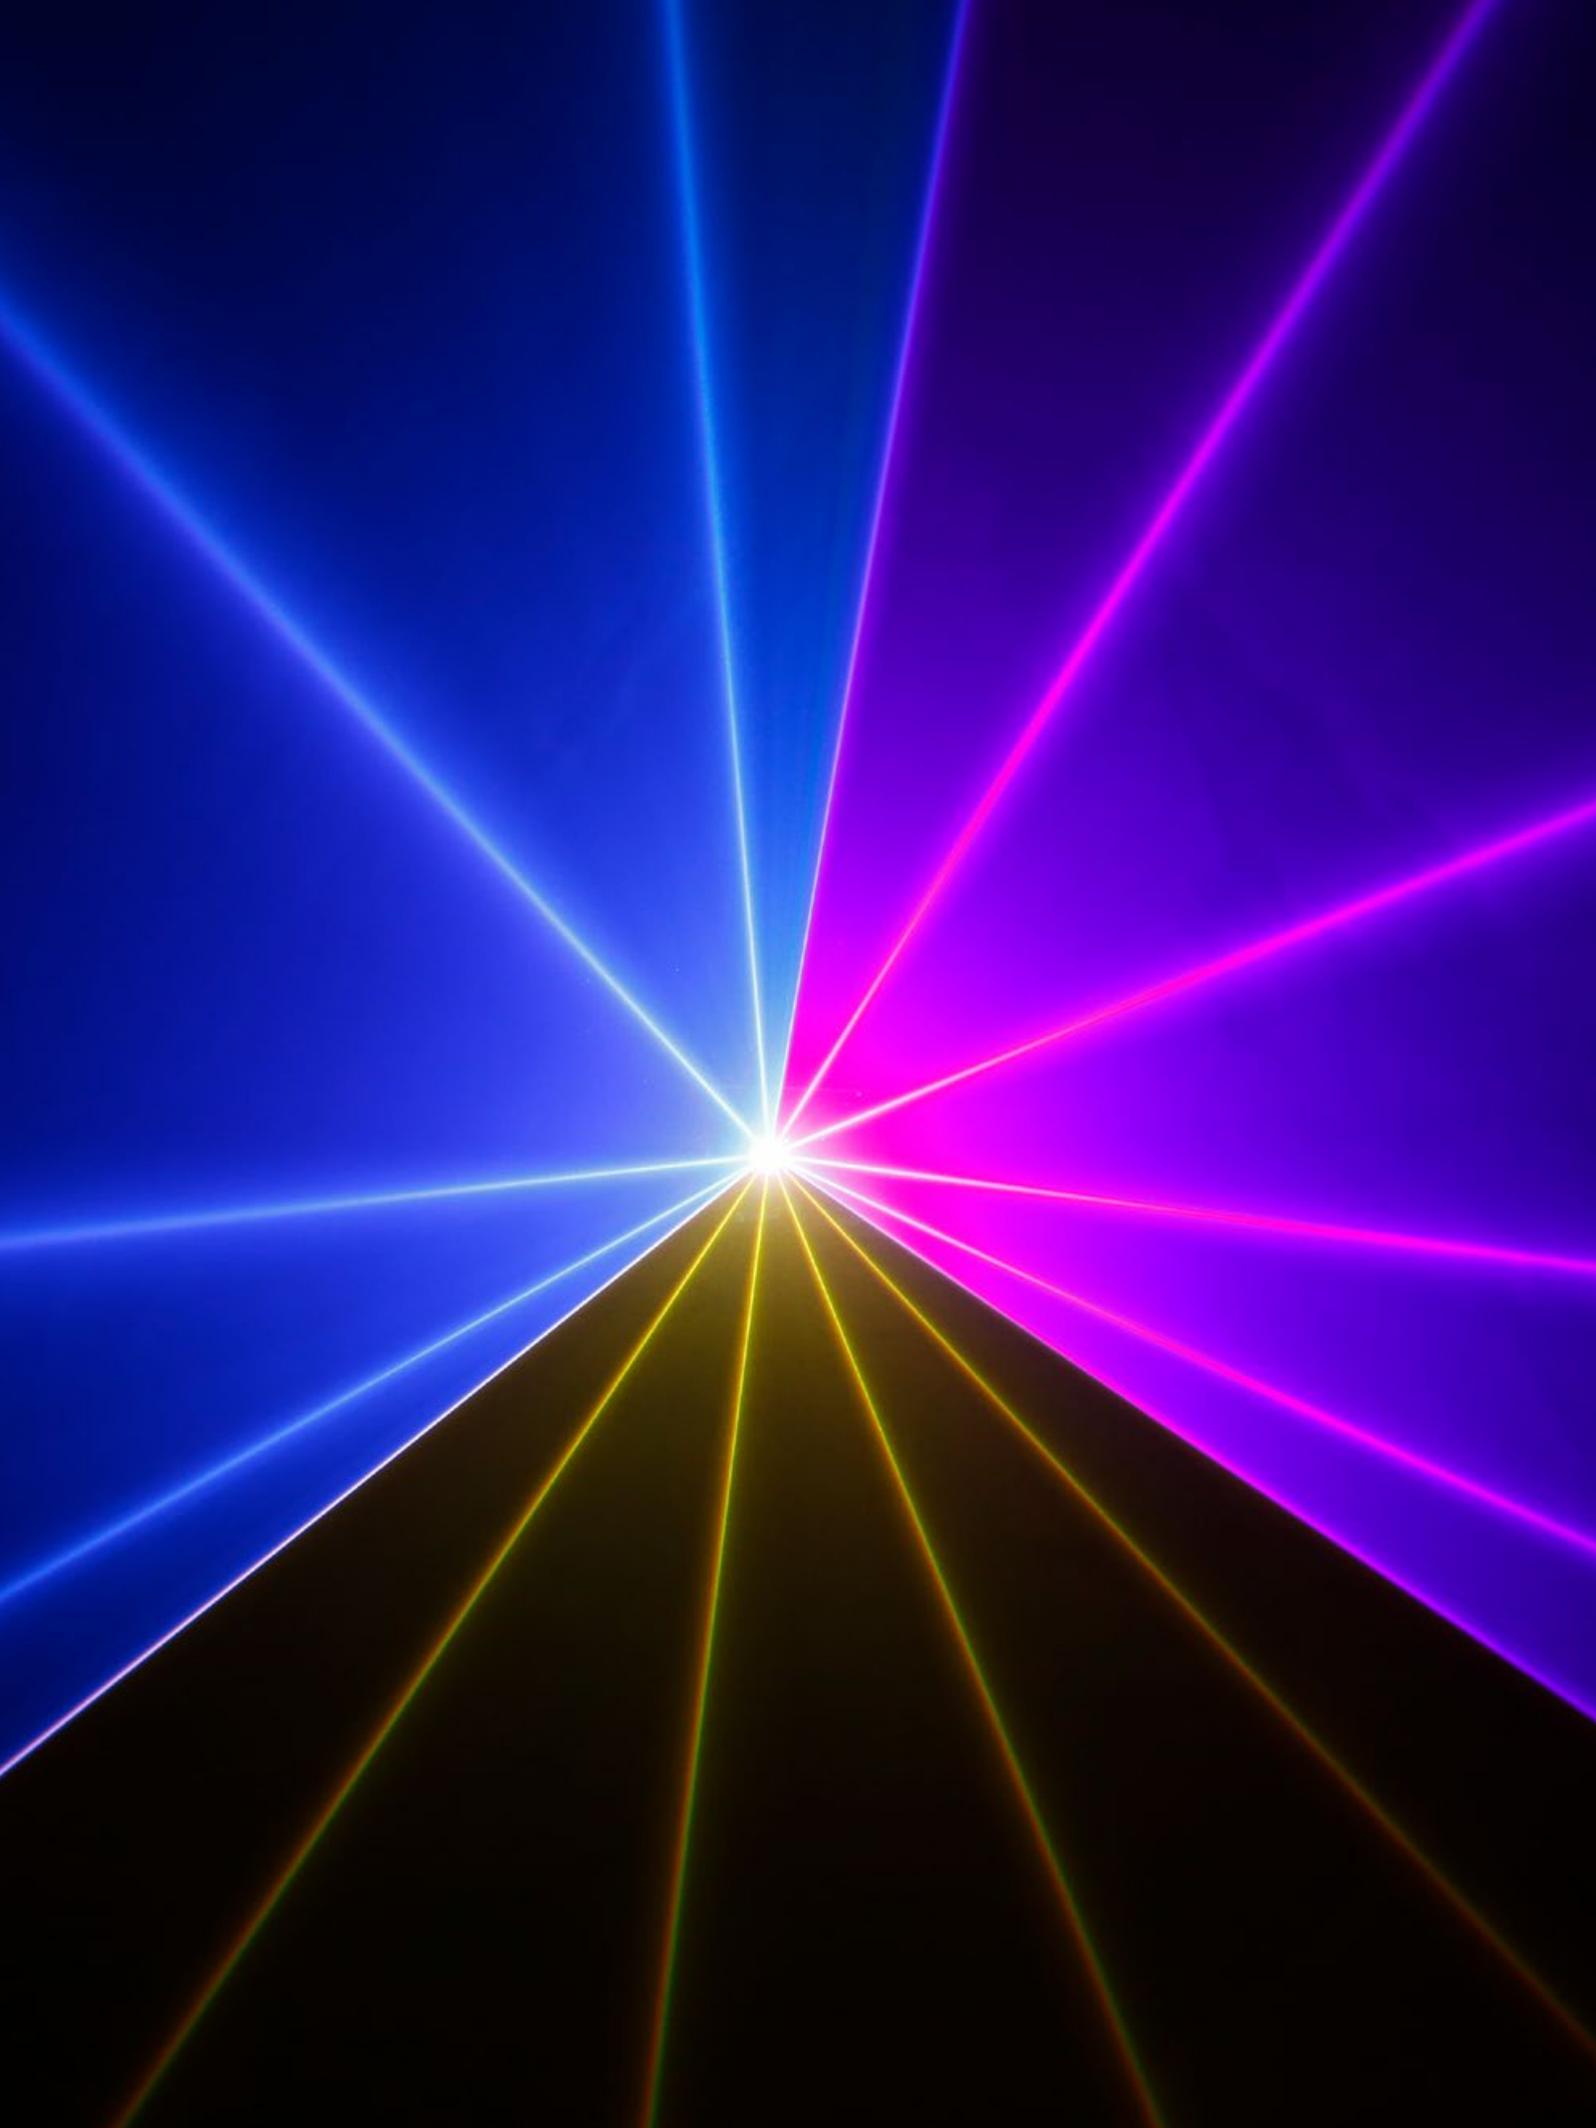

# LASERS

Laser lights are highly effective to add animation, drama and serious punch to performances and events taking them to a whole new level. They create exciting and impressive lighting effects at big concerts, mobile DJ shows, in nightclubs and major bars. With its Ioda, Luke and Wookie series Cameo provides compact, easily portable laser lights to generate stunning graphic patterns with razor-sharp beams. Featuring ILDA and DMX control, pre-programmed patterns, sound activation plus master, slave and standalone capability, Cameo pro level lasers are very affordable and the convenient way to create stellar light shows.



# IODA 1000 RGB

## PROFESSIONAL 1000MW RGB SHOW LASER

### FEATURES


- ▶ Professional laser show light
- ▶ Dust proof aluminium enclosure for minimum maintenance
- ▶ High speed high performance 30 Kpps galvo scanners @ 8° ILDA
- ▶ 128 pattern presets
- ▶ Analog modulation for up to 16 million color hues
- ▶ Precision beams with minimum Divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik PowerCON mains inputs and outputs
- ▶ Low noise fan for Quiet and cool operation




### SPECIFICATIONS

Product Number:	CLLIODA1000RGB
Product Type:	Laser
Total Power:	1000 mW
Colour Spectrum:	RGB
Wavelength:	447 nm, 532 nm, 638 nm
Beam Data:	Approx. 3 mm / 1.5 mrad Divergence
Laser Sources:	DPSS, Laser diode
Laser Class:	4
Scanner:	High Performance Galvoscaner, 30 kpps @ 8 Degrees ILDA
Max. Scan Angle:	60°
Operating Modes:	Auto Programs, DMX 512 Protocol, ILDA, Sound Control

DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
ILDA input / output:	25-Pin Sub-D Male / Female
DMX Mode:	4, 11-Channel
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector:	Neutrik PowerCON
Housing Material:	Aluminium
Cabinet Colour:	Black
Dimensions (W x H x L):	188 x 201 x 210 mm
Weight:	6.5 kg

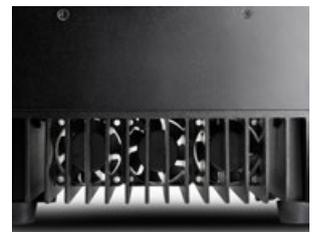

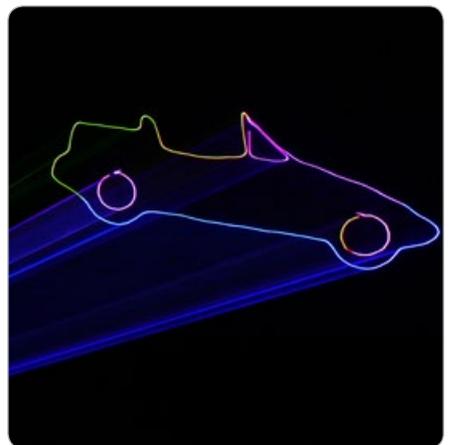

# LUKE SERIES

## PROFESSIONAL RGB SHOW LASER

### FEATURES


- ▶ Professional laser show light
- ▶ Dual layer construction for maximum optical performance
- ▶ High speed 30 Kpps galvo scanners @ 8° ILDA
- ▶ 128 pattern presets
- ▶ Precision beams with minimum Divergence for razor-sharp projections
- ▶ ILDA, DMX and sound control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Scan Fail Safety system
- ▶ Neutrik PowerCON mains inputs and outputs
- ▶ Rugged aluminium enclosure with low noise fan and key switch



### SPECIFICATIONS

Product Number:	CLLLUKE700RGB	CLLLUKE1000RGB
Product Type:	Laser	Laser
Total Power:	700 mW	1000 mW
Colour Spectrum:	RGB	RGB
Wavelength:	447 nm, 532 nm, 650 nm	447 nm, 532 nm, 638 nm
Beam Data:	Approx. 3 mm / 2 mrad Divergence	Approx. 3 mm / 1.5 mrad Divergence
Laser Sources:	Laser Diode & DPSS	Laser Diode & DPSS
Laser Class:	4	4
Scanner:	High-performance galvoscaner, 30 kpps @ 8 Degrees ILDA	High-performance galvoscaner, 30 kpps @ 8 Degrees ILDA
Max. Scan Angle:	60 °	60 °
Operating Modes:	Auto Programs, DMX 512 Protocol, ILDA, Sound Control	Auto Programs, DMX 512 Protocol, ILDA, Sound Control
DMX Input / Output:	3-Pin XLR Male / Female	3-Pin XLR Male / Female
ILDA input / output:	25-Pin Sub-D Male / Female	25-Pin Sub-D Male / Female
DMX Mode:	4, 11-Channel	4, 11-Channel
Controls:	Enter, Mode, Value Up, Value Down	Mode, Enter, Value Down, Value Up
Power Supply:	100 V AC - 240 V AC, 50 - 60 Hz	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W	100 W
Power Connector:	Neutrik PowerCON	Neutrik PowerCON
Housing Material:	Metal	Metal
Dimensions (W x H x D):	215 x 157 x 225 mm	215 x 157 x 225 mm



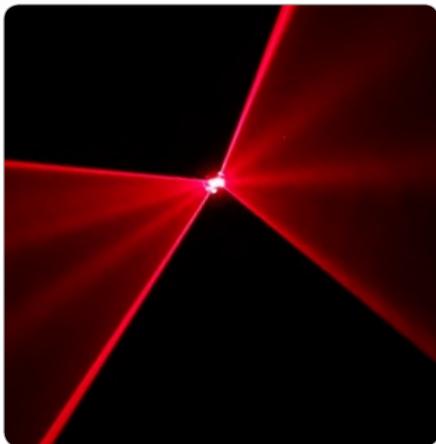

# WOOKIE SERIES

ANIMATION LASER GREEN / RED / RGY / RGB OR BLUE

## FEATURES

- ▶ Animation laser with high speed 5 Kpps stepper motor
- ▶ 60° scan angle
- ▶ Precision beams with minimum Divergence
- ▶ 32 pattern presets
- ▶ DMX, sound and infrared control plus auto function
- ▶ Master, slave and Standalone Modes
- ▶ Display with 4 function keys for easy manual operation
- ▶ Rugged aluminium enclosure with key switch
- ▶ Includes handheld infrared remote



Available versions:



## SPECIFICATIONS

Product Number:	CLLWOOKIE150G	CLLWOOKIE200R	CLLWOOKIE200RGY	CLLWOOKIE400RGB	CLLWOOKIE600B
Product Type:	Laser	Laser	Laser	Laser	Laser
Total Power:	150 mW	200 mW	200 mW	400 mW	600 mW
Colour Spectrum:	Green	Red	RGY	RGB	Blue
Wavelength:	532 nm	650 nm	532 nm, 650 nm	447 nm, 532 nm, 650 nm	447 nm
Beam Data:	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 1 mrad Divergence	Approx. 3 mm / 2 mrad Divergence	Approx. 3 mm / 2 mrad Divergence
Laser Sources:	DPSS	Laser diode	Laser diode, DPSS	Laser diode, DPSS	Laser diode
Laser Class:	3B	3B	3B	3B	4
Scanner:	High Speed Stepper Motors, 5 kpps				
Max. Scan Angle:	60°	60°	60°	60°	60°
Operating Modes:	Auto Programs, DMX 512 Protocol, Sound Control				
DMX Input / Output:	3-Pin XLR Male / Female	3-Pin XLR3 male / female	3-Pin XLR Male / Female	3-Pin XLR Male / Female	3-Pin XLR Male / Female
DMX Mode:	3, 9-Channel				
Controls:	Mode, Enter, Value Down, Value Up				
Power Supply:	AC 100-240 V / 50-60 Hz				
Power Consumption:	50 W				
Power Connector:	IEC Power Socket Male				
Housing Material:	Metal	Metal	Metal	Metal	Metal
Housing Colour:	Black	Black	Black	Black	Black
Dimensions (W x H x D):	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)	180 x 90 x 192 mm (Excl. Mntg. Bracket)
Weight:	2.0 kg				





# LED STROBES




Controlling the weather is impossible in nature, but in clubs or discotheques you can control flashes with an LED Strobe. This is an instrument emitting flashes of light in determined periods. Cameo's Strobes work with 20 flashes of light per second. The typical disco effect with staccato movements occurs if the LED Strobe is used in a dark setting.





# THUNDER WASH 600 W

3 IN 1 STROBE, BLINDER AND  
WASH LIGHT 648 x 0.2 W WHITE

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 648 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ 4-zone segment control for spectacular chase effects

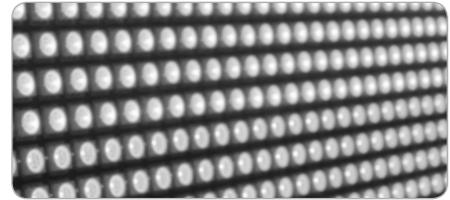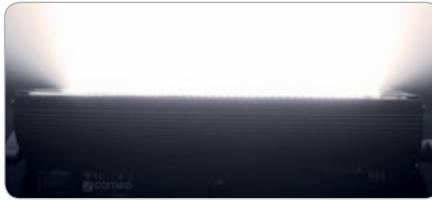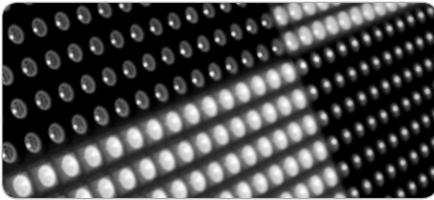

## PHOTOMETRICAL DATA

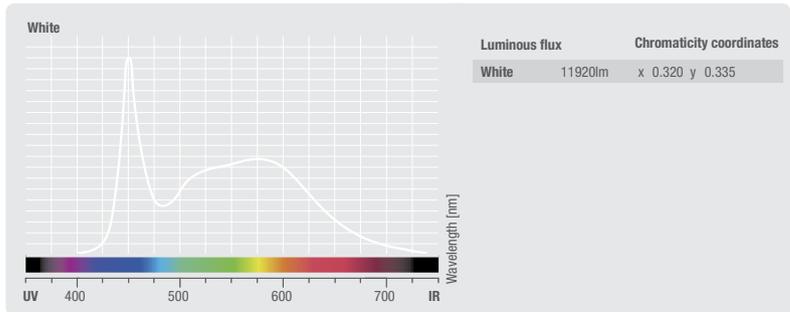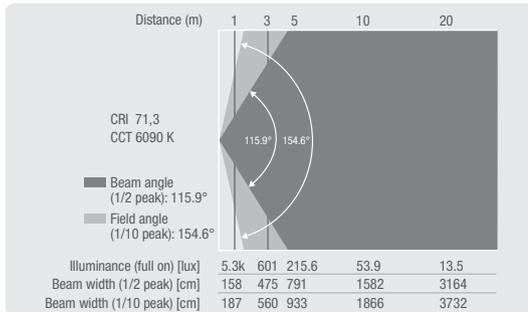

## SPECIFICATIONS

Product Number:	CLTW600W
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	White
Number Of LEDs:	648
LED Type:	0.2 W
Dispersion:	116°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 1, 2, 5, 7-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate
Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control


Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	335 x 93 x 182 mm (Excluding Mounting Bracket)
Weight:	1.8 kg




## THUNDER WASH 600 RGB

3 IN 1 STROBE, BLINDER AND  
WASH LIGHT 648 x 0.2 W RGB

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 648 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket

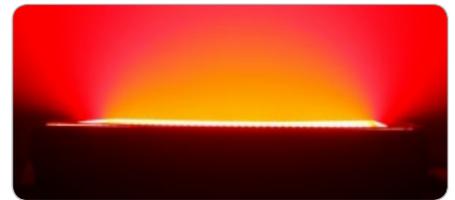

### PHOTOMETRICAL DATA

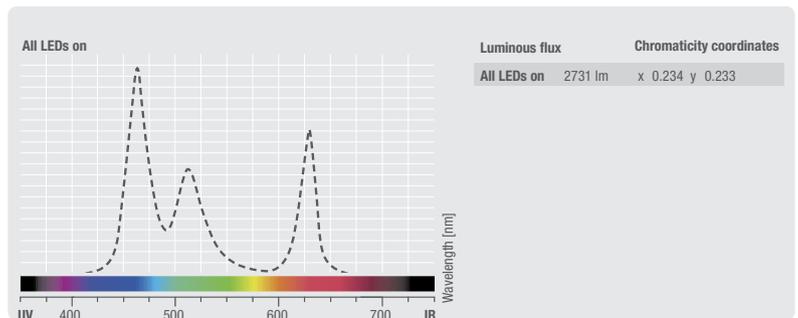

### SPECIFICATIONS

Product Number:	CLTW600RGB
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	RGB
Number Of LEDs:	648
LED Type:	0.2 W
Dispersion:	118°
Refresh Rate:	1 - 30 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2 Ch-1, 2 Ch-2, 3 Ch-1, 3 Ch-2, 3 Ch-3, 2, 9, 12-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate


Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control
Controls:	Mode, Value Up, Value Down, Enter
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	335 x 93 x 182 mm (Excluding Mounting Bracket)
Weight:	1.8 kg





# THUNDER WASH 100 W

3 IN 1 STROBE, BLINDER AND  
WASH LIGHT 648 x 0.2 W WHITE

- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 132 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low Power Consumption

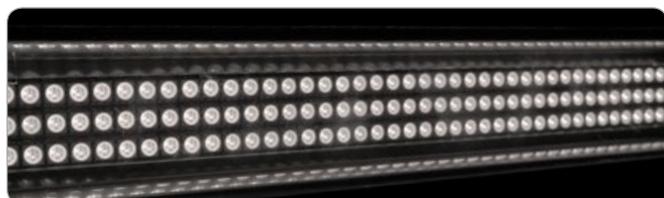

## PHOTOMETRICAL DATA

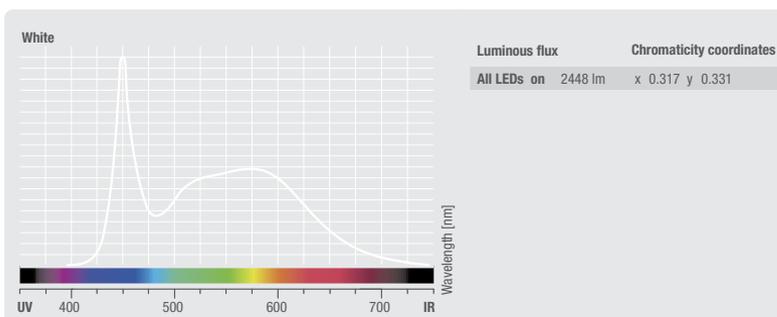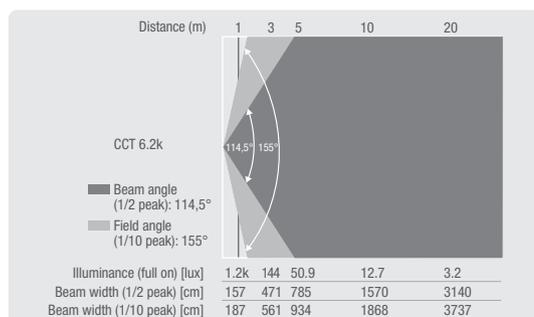

## SPECIFICATIONS

Product Number:	CLTW100W
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	White
Number Of LEDs:	132
LED Type:	0.2 W
Dispersion:	115°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3 Ch-1, 3 Ch-1, 1, 2-Channel
DMX Functions:	Dimmer, Flash Rate
Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control


Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	310 x 70 x 70 mm (Excluding Mounting Bracket)
Weight:	1.4 kg

# THUNDER WASH 100 RGB



3 IN 1 STROBE, BLINDER AND  
WASH LIGHT 648 x 0.2 W RBG



- ▶ Strobe, Blinder and Wash Light all in one
- ▶ 132 white SMD LEDs
- ▶ 1 to 30 flashes/sec adjustable
- ▶ DMX, Sound- and manual control
- ▶ Master, Slave and Standalone operation
- ▶ Rugged metal housing with universal mounting bracket
- ▶ Low Power Consumption

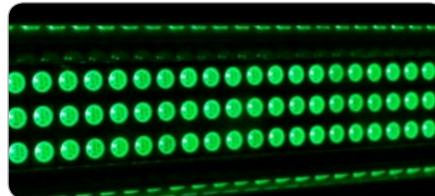

## PHOTOMETRICAL DATA

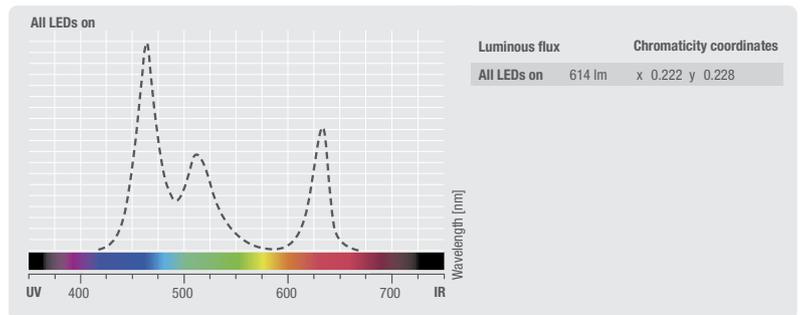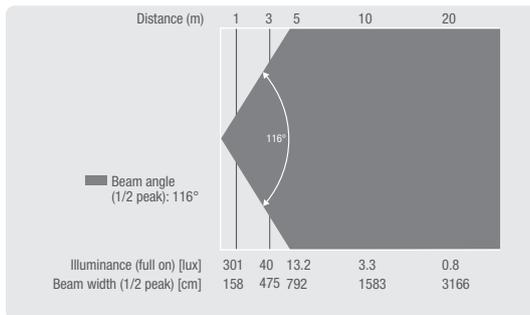

## SPECIFICATIONS

Product Number:	CLTW100RGB
Product Type:	LED Strobes
Type:	Strobe / Blinder / Washer
Colour Spectrum:	RGB
Number Of LEDs:	132
LED Type:	0.2 W
Dispersion:	116°
Refresh Rate:	1 - 30 Hz
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2 Ch-1, 2 Ch-2, 3 Ch-1, 3 Ch-2, 3 Ch-3, 1, 4, 6-Channel
DMX Functions:	Dimmer, Flash Duration, Flash Rate

Standalone Modes:	Dimmer Mode, Flash Duration, Slave Mode, Sound Control
Controls:	Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	310 x 70 x 70 mm (Excluding Mounting Bracket)
Weight:	1.4 kg



NEW



# FLASH MATRIX 250

## 3-IN-1 STROBE-, CHASE- AND BLINDER EFFECT

- ▶ 3 effects in 1 fixture: Strobe, chaser and blinder
- ▶ 25 powerful white 6W LEDs for impressive, ultra bright 9200 lm
- ▶ 1 - 30 Hz adjustable Strobe
- ▶ 25-zone chase effect
- ▶ Alphabetic character and numeral mapping
- ▶ 7 Modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED Display for easy configuration

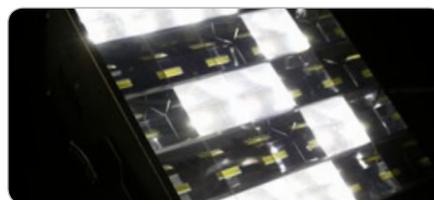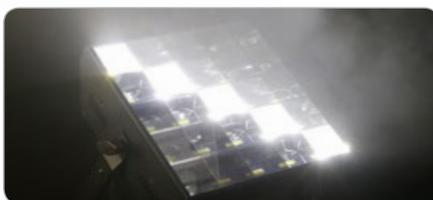

## SPECIFICATIONS

Product Number:	CLFM250
Product Type:	LED Lighting Effects
Type:	Strobe
Colour Spectrum:	White
Number Of LEDs:	25
LED Type:	COB LED
Dispersion:	(Beam) 50° / (Field) 74°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3, 5, 10, 25, 30-Channel
DMX Functions:	Letters, Numbers, Strobe, Symbols, Auto Programs
Standalone Modes:	Strobe, Auto Run, Sound Control, Static Colour
Controls:	Enter, Mode, Value Up, Value Down

Indicators:	7-Segment AF Input Level Meter (Left / Right)
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	125 W
Power Connector:	IEC Power Input And Output
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Quiet
Illuminance:	3,730 lx @ 1 m
Luminous Flux:	9,200 lm
Dimensions (W x H x L):	305 x 310 x 105 mm (Excluding Mounting Bracket)
Weight:	4 kg
Features:	Adjustable Mounting Bracket Included



## FLASH BAR 150

3-IN-1 STROBE-, CHASE- AND BLINDER EFFECT FIXTURE

- ▶ 3 FX in 1: Strobe, chaser and blinder
- ▶ 15-zone chase effect
- ▶ 15 powerful, ultra bright 6W LEDs
- ▶ 6 Modes of DMX control plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ 4-button LED Display for easy operation



### SPECIFICATIONS


Product Number:	CLFB150
Product Type:	LED Strobe
Type:	Strobe
Colour Spectrum:	White
Number Of LEDs:	15
LED Type:	6 W
Dispersion:	80°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 2, 3, 5, 15, 20-Channel
DMX Functions:	Auto Programs, Dimmer, Flash Duration, Flash Rate
High Speed Strobe:	> 30 Hz

Standalone Modes:	Dimmer Mode, Flash Rate, Slave Mode, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Illuminance:	2,250 lx @ 1m
Dimensions (W x H x L):	906 x 73 x 1155 mm
Weight:	3.3 kg



# LED LIGHT EFFECTS

With the LED effect moonflower you can have a creative lighting choreography. Create the typical LED effect of discotheques and clubs with the moonflower headlight. That means, dancing lights filling the room with colourful light beams. This intense light effect is mostly controlled by an integrated microphone transporting the sounds in the sound control Mode. Although they are moving at rapid speed, you can still distinguish the colourful light beams with the LED effect moonflower. Further features are wide Beam Angles and the possibility to regulate or programme your choreography manually.

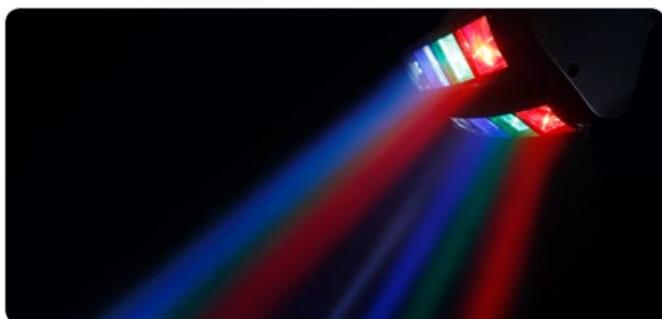

# OCTAFLY XS

## SWEEPING 8-ZONE RGBW CHASE EFFECT LIGHT

### FEATURES

- ▶ Quick sweeping 8-zone chase effect
- ▶ Dual LED bars with independent 270° tilt and 4 lenses each
- ▶ Tightly focused 4.5° beam spread
- ▶ 3 DMX Modes plus Standalone, Master and Slave operation
- ▶ Sound activation and Show Mode with amazing built-in Auto Programs
- ▶ Intense pulse & Strobe effects
- ▶ Convection Cooling
- ▶ 4-button LED Display for easy configuration



### SPECIFICATIONS

Product Number:	CLOFXS
Product Type:	LED Moving Lights
Type:	LED Moving Effects
Colour Spectrum:	2x Red, 2x Blue, 2x Green, 2 x white
Number Of LEDs:	8
Rated Avg. Life:	50,000 h
Beam Angle:	4.5°
LED Type:	3 W
Protocols:	USITT DMX-512
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	5, 9, 11-Channel
DMX Functions:	Master Dimmer, PAN, PAN Fine, Strobe, Strobe Duration, Red, Green, Blue, White, Auto/Sound Program, Sound-Sensitivity / Auto-Speed
Wireless DMX:	No
Flash Rate Strobe:	1 - 20Hz

Standalone Modes:	Show, Auto Run, Sound Control
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Fuse:	F 3 AL
Power Input:	IEC Power Connector Male
Housing Material:	Metal, ABS Plastic
Cabinet Colour:	Black
Cooling:	Convection Cooled
Protection Class IP:	IP20
Operating Temperature:	0 - 40°C
Battery:	No
Dimensions (W x H x D):	280 x 145 x 150 mm
Weight:	2 kg

NEW



# UVO

## 5-IN-1 LED EFFECT LIGHT

- ▶ 5-in-1 LED effect light with IR remote control
- ▶ Wash light and black light with 9 x 4W RGB+UV LEDs
- ▶ Flower effect with 24 red, 18 green, 18 blue and 24 amber LEDs
- ▶ Laser with Red 100 mW and green 30 mW diodes
- ▶ Stroboscope with 12 ultra bright white 0.5 W LEDs
- ▶ All effects can be applied individually
- ▶ DMX control, sound activation and automated programs
- ▶ Master and slave operation
- ▶ Rugged all-metal housing with Low-Noise Fan
- ▶ Universal mounting bracket included



### SPECIFICATIONS

Product Number:	CLUVO
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Laser Effects
Colour Spectrum Washlight:	RGB+UV
Number Of LEDs Washlight:	9
Colour Spectrum Flower Effect:	RGBA
Number Of LEDs Flower Effect:	84
Colour Spectrum Laser Effect:	Green LED (532 nm), Red LED (650 nm)
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	12
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female


DMX Mode:	3, 5, 12, 27, 32-Channel
DMX Functions:	Laser, Auto Programs, Wash, Strobe, Flower, Sound Programs
Standalone Modes:	Auto Programs, Slave Mode, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	70 W
Power Connector:	IEC Power Input And Output
Fuse:	T 1.6AL / 250 V
Temperature range:	0 - 40 °C
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Low-Noise Fan
Dimensions (W x H x L):	280 x 230 x 170 mm
Weight:	2.6 kg
Features:	Adjustable Mounting Bracket Included, Connection For External Emergency Stop Switch, IR Remote, Key Switch With 2 Keys



## STORM

3 IN 1 LIGHTING EFFECT,  
5 x 3W RGBWA DERBY,  
STROBE AND GRATING LASER

- ▶ 3-in-1 LED Effect
- ▶ 5 x 3 W RGBWA Derby Effect
- ▶ 150 mW Grating Laser (Red 100 mW, Green 50 mW)
- ▶ 8 x 1 W Strobe LED's
- ▶ 10 DMX channels, sound and automatic control
- ▶ Master and slave operation
- ▶ Low Power Consumption
- ▶ Sturdy metal housing
- ▶ Universal mounting bracket included

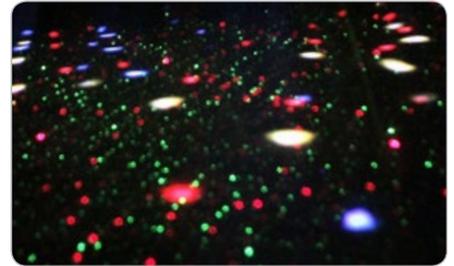

## SPECIFICATIONS

Product Number:	CLSTORM
Product Type:	LED Lighting Effects
Type:	LED / Laser / Effects
Colour Spectrum Derby Effect:	RGBWA
Number Of LEDs Derby Effect:	5
LED Type Derby Effect:	3 W
Dispersion Derby Effect:	68°
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Beam Angle Laser Effect:	74°
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Remote Connection
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	8
LED Type Strobe:	1 W
Beam Angle Strobe:	8°

DMX Input / Output:	Optional Remote Switch , XLR 3-Pin Male / Female
DMX Mode:	3, 5, 12, 27, 32-Channel
DMX Functions:	Laser, Auto Programs, Derby, Strobe, Sound Programs
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	250 x 250 x 170 mm
Weight:	4.3 kg
Features:	Adjustable Mounting Bracket Included, Optional Remote Switch, Security Lock Slot



# FLAT STORM

## 3-IN-1 FLAT PAR CAN WITH GRATING LASER AND STROBE

- ▶ 3-in-1 flat PAR can with grating laser and Strobe
- ▶ PAR can with 6 x 9W RGB LEDs and single pixel control
- ▶ Class 3R grating laser with Red 100 mW and green 30 mW diodes
- ▶ Strobe with 24 white 0.5 W LEDs
- ▶ Each effect individually usable
- ▶ 4 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Compound housing with Low-Noise Fan and safety eye
- ▶ Infrared remote and Adjustable Mounting Bracket Included



### SPECIFICATIONS

Product Number:	CLFLATSTORM
Product Type:	LED Lighting Effects
Type:	Laser, LED / Strobe / Laser Effects
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Number Of Diodes Laser Effect:	1 x Green , 1 x Red
Type of Diodes Laser Effect:	Red 100mW, Green 30mW
Laser Class Laser Effect:	3R
Colour Spectrum Strobe:	CW
Number Of LEDs Strobe:	24
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	3, 5, 9, 30-Channel

DMX Functions:	Auto Programm Speed, Auto Programs, Colour Macro, Laser, Master Dimmer, Rotate Laser, Single RGB LED's, Sound Control, Strobe, Strobe Speed Laser
Standalone Modes:	Auto Programs, Master / Slave Mode, Sound Programs, Static
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4x7 Segment LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Fuse:	T 1.0A
Housing Material:	ABS Plastic
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	207 x 207 x 78 mm
Weight:	1.3 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Key, Remote Connection



**NEW**

## FLAT MOON

3-IN-1 LIGHTING EFFECT WITH  
FLAT 3-IN-1 MULTI-EFFECT RGB  
+UV PAR-LIGHT WITH STROBE



- ▶ 3-in-1 multi-effect light with RGB+UV, cold white strobe and single RGB centre LED
- ▶ 9 x 4W RGB+UV LEDs for rich colour mixing and blacklight
- ▶ 21 x 0.5W cold white SMD LEDs for dynamic high-speed strobe effects
- ▶ Single 18W RGB centre LED
- ▶ Individual control of RGB+UV ring, strobe programs and center LED
- ▶ 4 DMX plus automatic and sound activation modes
- ▶ Master, slave and standalone operation
- ▶ Low-noise fan for cool, quiet operation
- ▶ IR remote and universal mounting bracket included

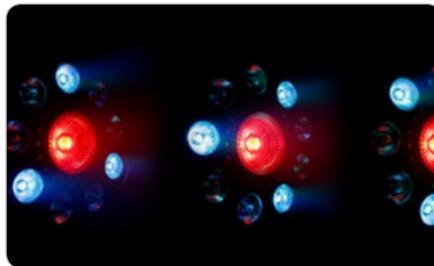

### SPECIFICATIONS

Product Number:	CLFLATMOON
Product Type:	LED PAR Lighting
Type:	LED / Laser / Effects
Colour Spectrum PAR:	RGB+UV
LED Type PAR:	4 W
Number of LEDs PAR:	9
Colour Spectrum centre LED:	RGB
Number of centre LEDs:	1
LED Type centre LEDs:	18 W
Colour Spectrum Strobe:	CW
Number of LEDs Strobe:	21
LED Type Strobe:	0.5 W
DMX Input:	XLR 3-Pin Male
DMX Mode:	2, 5, 9, 22-Channel
DMX Functions:	Auto programs, Colour macro, Master dimmer, RGB centre LED, RGB+UV, Sound control, Strobe

Standalone Modes:	Auto programs, Master / Slave mode, Setup, Sound programs, Static colour
Controls:	Down, Enter, Mode, Up
Indicators:	4x7 segment LED Display
Power Connector:	IEC Power Input And Output
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	67 W
Fuse:	T1.0A
Temperature range:	0 - 40 °C
Housing Material:	ABS plastic
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	207 x 78 x 207 mm
Weight:	1.8 kg
Features:	Adjustable mounting bracket included, IR Remote, Security lock slot





## STORM FX

3-IN-1 LIGHTING EFFECT WITH GRATING LASER, STROBE AND DERBY EFFECT INCL. IR-REMOTE

- ▶ 3 FX in 1: grating laser, Strobe, chaser and derby effect
- ▶ Laser with Red 100mW / 650nm and green 30mW / 532nm diodes
- ▶ Strobe with 12 ultra-bright white 0.5 W LEDs
- ▶ RGBWA derby effect with 9 W RGB and 9 W BWA LEDs
- ▶ 2 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



## SPECIFICATIONS

Product Number:	CLSTORMFX
Product Type:	LED Lighting Effects
Type:	LED / Laser / Effects
Colour Spectrum Derby Effect:	RGBWA (9W RGB + 9W BWA)
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Colour Spectrum Laser Effect:	Green LED (532 nm) , Red LED (650 nm)
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	white
Number Of LEDs Strobe:	12
LED Type Strobe:	0.5 W


DMX Input / Output:	XLR 3-Pin Male / Female
DMX Mode:	2, 12-Channel
DMX Functions:	Auto Programs, Derby, Strobe, Sound Programs
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	290 x 210 x 200 mm
Weight:	2.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Optional Remote Switch, Security Lock Slot, Short-Circuit Connector For Remote Connection Included



# MOONFLOWER HP

## 32 W 4 IN 1 RGBW HIGHPOWER LED EFFECT

- ▶ 1 x 32 W RGBW 4 in 1 High Power LED
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included

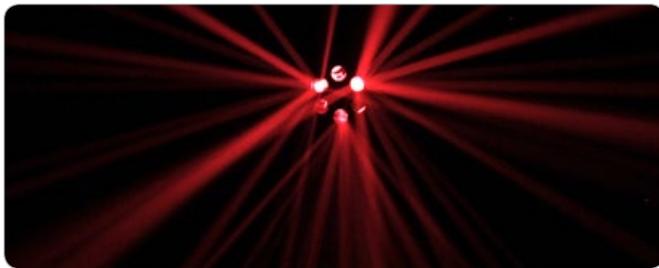

### SPECIFICATIONS

Product Number:	CLFLOWERHP
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBW
Number Of LEDs:	1
LED Type:	32 W 4 in 1
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow

Standalone Modes:	Auto Run, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	250 x 240 x 177 mm
Weight:	3.3 kg



## MOONFLOWER

9 W TRI COLOUR LED LIGHTING EFFECT

- ▶ 9 W Ultra High Power TRI RGB LED
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Universal mounting bracket included
- ▶ Sturdy metal housing



### SPECIFICATIONS

Product Number:	CLMOVER1
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGB
Number Of LEDs:	1
LED Type:	9 W TRI Colour
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	4-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow
Standalone Modes:	Auto Run, Sound Control

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	30 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	250 x 240 x 177 mm
Weight:	4.0 kg
Features:	6 Lenses For Razor-Sharp Light Beams



# SUPERFLY HP

## 5 x 10 WATT RGBWA HIGHPOWER LED EFFECT

- ▶ 5 x 10 Watt RGBWA High Power LEDs
- ▶ Low Power Consumption
- ▶ Power in/out for daisy chaining
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LED Display
- ▶ Rugged metal housing
- ▶ Universal mounting bracket included



## SPECIFICATIONS

Product Number:	CLSUPERFLYHP
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBWA
Number Of LEDs:	5
LED Type:	10 W RGBWA
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 5-Channel
DMX Functions:	Clockwise Fast & Slow, Colour Selection, Counter Clockwise Fast & Slow, Dimmer, No Rotation, Strobing Fast & Slow

Standalone Modes:	Auto Run, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	260 x 225 x 300 mm
Weight:	5.5 kg



## SUPERFLY XS

2-IN-1 DERBY EFFECT AND STROBE INCL. IR-REMOTE

- ▶ 2 FX in 1: derby effect and Strobe
- ▶ RGBW flower effect with four 3 W LEDs
- ▶ Strobe with 16 ultra-bright white 0.5 W LEDs
- ▶ 2 DMX Modes, sound activation and automated programs
- ▶ Master, slave and standalone operation
- ▶ Each effect individually usable
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



### SPECIFICATIONS

Product Number:	CLSUPERFLYXS
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBW
Number Of LEDs Derby Effect:	4
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	16
LED Type Strobe:	0.5 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 5-Channel
DMX Functions:	Auto Programs, Derby, Sound Programs, Strobe

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	50 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	202 x 168 x 142 mm
Weight:	1.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Security Lock Slot



# SUPERFLY FX

## 2-IN-1 LED DERBY EFFECT WITH GRATING LASER

- ▶ 2 FX in one: derby effect and grating laser
- ▶ RGBW derby effect with four 3 W LEDs
- ▶ 100mW red and 30mW green class 3R grating laser
- ▶ Each effect individually usable
- ▶ 2 DMX Modes, sound activation and Auto Run programs
- ▶ Master, slave and standalone operation
- ▶ Interlock connector and key switch
- ▶ Low-Noise Fan
- ▶ Safety eye and adjustable mounting bracket
- ▶ Infrared remote control included



## SPECIFICATIONS

Product Number:	CLSUPERFLYFX
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBW
Number Of LEDs:	4
Type of Diodes Laser Effect:	Red 100 mW, Green 50 mW (DPSS Laser)
Laser Class Laser Effect:	3R
Laser Shutdown (Safety Function):	Lock Switch, Remote Connection
LED Type:	3 W
Colour Spectrum Laser Effect:	Green (532 nm) , Red (650 nm)
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 8-Channel
DMX Functions:	Derby, Derby Motor, Derby Program, Laser, Laser Motor, Laser Program, Stroboscope
Standalone Modes:	Auto Programs, Sound Programs


Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	220 x 140 x 169 mm
Weight:	1.6 kg
Features:	Adjustable Mounting Bracket Included, IR Remote, Optional Remote Switch, Rubber feet, Security Lock Slot , Short-Circuit Connector For Remote Connection Included



## SERUM

### 3-IN-1 DERBY, MOONFLOWER AND STROBE EFFECT LIGHT

- ▶ 3-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 2 x 9W RGB LEDs
- ▶ Moonflower effect with 64 x 5mm LEDs (16 red, green, blue, white respectively)
- ▶ Strobe effect with 36 x 5mm LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation

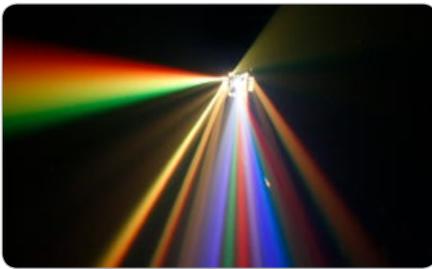

## SPECIFICATIONS

Product Number:	CLSERUM
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGB
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	white
Number Of LEDs Strobe:	36
LED Type Strobe:	5 mm
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 7-Channel
DMX Functions:	Auto Programs, Derby, Flower, Sound Programs Strobe

Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	110 V AC - 240 V AC / 50 – 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	245 x 240 x 240 mm
Weight:	3.205 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



# VOODOO

## 2-IN-1 DERBY AND STROBE EFFECT LIGHT

- ▶ 2-in-1 LED Hybrid Effect Light
- ▶ Derby effect with 20 x 3W RGBA LEDs and single pixel control
- ▶ Strobe effect with 12 x 1W LEDs
- ▶ Individual DMX, automated or sound control of each effect
- ▶ 3 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote



### SPECIFICATIONS

Product Number:	CLV00D00
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Effects
Colour Spectrum Derby Effect:	RGBA
Number Of LEDs Derby Effect:	20
LED Type Derby Effect:	3 W
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	12
LED Type Strobe:	1 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 8-Channel
DMX Functions:	Derby, Auto Programs, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	275 x 290 x 280 mm
Weight:	4.214 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



## ARA DERBY MATRIX BEAM LIGHT

- ▶ 24 x 3W RGBA Derby Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote



### SPECIFICATIONS

Product Number:	CLARA
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBA
Number Of LEDs:	24
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 8-Channel
DMX Functions:	Auto Programs, Sound Programs, Matrix Beam
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	210 x 360 x 310 mm
Weight:	4.05 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



# EYE-EYE

## DERBY MATRIX BEAM LIGHT

- ▶ 24 x 3W RGBA Derby Matrix Effect
- ▶ Individual DMX control of all 24 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation



### SPECIFICATIONS

Product Number:	CLEYEEYE
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBA
Number Of LEDs:	24
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 4, 8-Channel
DMX Functions:	Derby, Auto Programs, Sound Programs, Strobe
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	90 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Dimensions (W x H x L):	265 x 185 x 165 mm
Weight:	3.635 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot



## WAYFARER FOUR EYES DERBY MATRIX BEAM LIGHT


- ▶ 16 x 3W RGBA Four Eyes Derby Matrix Effect
- ▶ Individual DMX control of all 16 LEDs
- ▶ 4 DMX Modes plus master, slave and standalone operation
- ▶ Sound activation and built-in automated programs
- ▶ Rugged metal enclosure with efficient convection cooling
- ▶ Bright 4-button display for easy menu navigation
- ▶ Adjustable mounting bracket and safety eye for secure installation
- ▶ Includes handheld infrared remote



## SPECIFICATIONS

Product Number:	CLWAYFARER
Product Type:	LED Lighting Effects
Type:	LED Effect Lights
Colour Spectrum:	RGBA
Number Of LEDs:	16
LED Type:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	2, 3, 4, 6-Channel
DMX Functions:	Auto Programs, Sound Programs, Matrix Beam
Standalone Modes:	Auto Programs, Sound Programs

Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	75 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Dimensions (W x H x L):	400 x 135 x 165 mm
Weight:	2.88 kg
Features:	Adjustable Mounting Bracket Included, Security Lock Slot

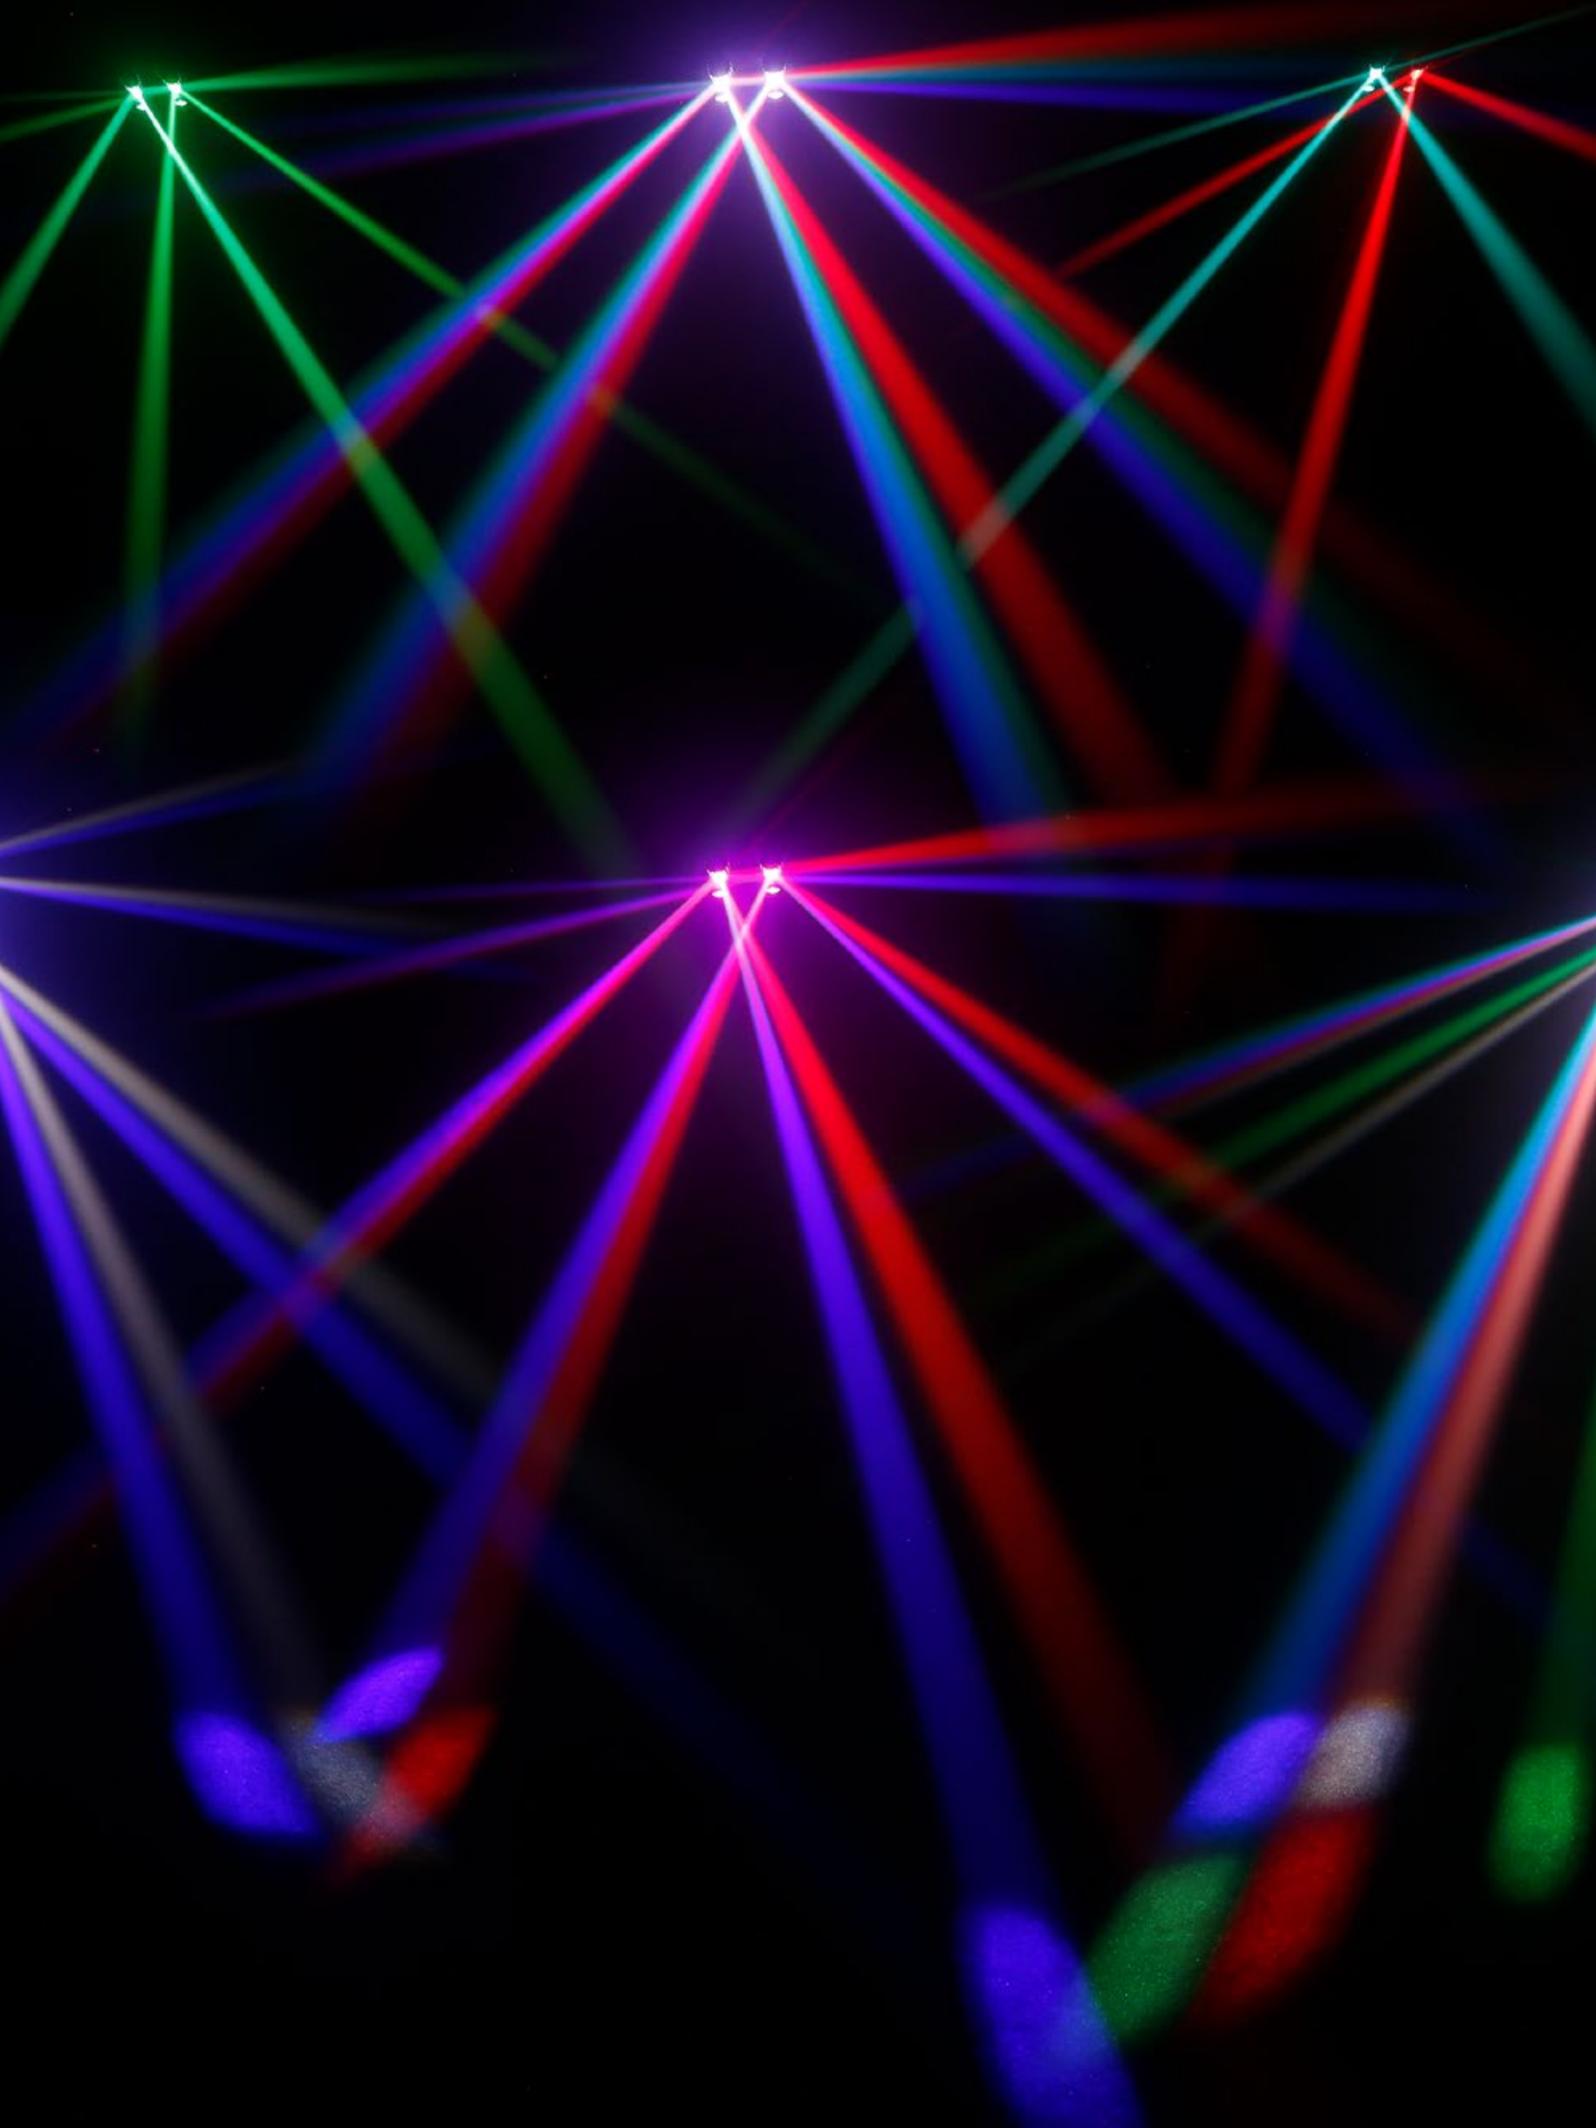

# LED SCANNERS

Light every corner of the room and start your own creation of brightness. An LED scanner makes it possible. This is a multifunctional headlight which shatters light beams over the room by reflecting it onto a moveable mirror. Generous tilting angles as well as a very flexible use of the mirrors support a variety of lighting creations – manually and automatically. Gobos, which are attachments, enlarge these varieties even further. They can add patterns, words or pictures. A strong performance, low energy consumption and very lively, intensive colour impressions – these are the distinct features of the LED scanner. LED scanners are an essential part of Modern lighting, especially in discoteques. Professional and creative lighting needs professional and creative tools.

NEW



# NANO ROLL 100

## BARREL SCANNER WITH 7 GOBOS

- ▶ Miniature barrel scanner with gobo wheel
- ▶ Single high-power 10W Cree LED
- ▶ Precision high-speed rotation and pan for vibrant effects
- ▶ Gobo wheel with 7 gobos + open
- ▶ Colour wheel with red, orange, yellow, green, cyan, magenta and blue filters + open
- ▶ Gobo and colour wheels individually controllable
- ▶ Dimming, high-speed strobe, shutter and gobo shake functions
- ▶ 3 DMX modes plus master and slave operation
- ▶ 17 auto run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual



### SPECIFICATIONS

Product Number:	CLNROLL100
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	8-channel multi colour
Number Of LEDs:	1
LED Type:	10 W
Number of gobos:	7 + open
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 8, 10-Channel
DMX Functions:	Adjustable audio sensitivity, Auto programs, Colour wheel, Dimmer, Gobo wheel, PAN, Pan speed, Reset, Roll, Sound control, Speed, Strobe
PAN Movement:	180°
TILT Movement:	Unlimited

High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto run, Show, Sound control
Controls:	-, +, Enter, mode, Value Down, Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	3 A
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Max. Ambient Temperature:	32 °F - 40°
Dimensions (W x H x L):	130 x 339 x 129 mm
Weight:	2.3 kg



## NANO ROLL 200

### DOUBLE LED MINI BARREL SCANNER 2 x 10 W RGBW

- ▶ Miniature Double Barrel Scanner with 2 high-power 10W RGBW LEDs
- ▶ 2 independently controllable stepper motors for accurate positioning
- ▶ Extremely fast 180° pan and Unlimited tilt
- ▶ 5 DMX Modes plus Standalone, Master and Slave operation
- ▶ Sound Activation and Auto Mode with amazing built-in programs
- ▶ High-speed Strobe and dimmer functions
- ▶ Convection Cooling
- ▶ 4-button LED Display for easy configuration



## SPECIFICATIONS

Product Number:	CLNROLL200
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	RGBW
Number Of LEDs:	2
LED Type:	10 W
Dispersion:	4°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 4, 11, 16, 19-Channel
DMX Functions:	Dimmer, Auto Programs, Sound Programs, Strobe, PAN, TILT
Wireless DMX:	No
PAN Movement:	180°
TILT Movement:	Unlimited

High Speed Strobe:	1 - 20 Hz
Standalone Modes:	Auto Programs, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	40 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	4 A
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Max. Ambient Temperature:	0° - 40°
Dimensions (W x H x L):	275 x 300 x 143 mm
Weight:	3.7 kg

NEW



# NANO SCAN 100

## LED MINI GOBO SCANNER 10W

- ▶ Miniature Gobo Scanner with single high-power 10W LED
- ▶ Precise high-speed pan and tilt for vibrant beam movement
- ▶ Colour Wheel with red, orange, yellow, green, cyan, magenta and blue filters + open
- ▶ Gobo wheel with 7 gobos + open
- ▶ Gobo and Colour Wheels independently controllable
- ▶ Dimmer, high-speed Strobe, shutter and gobo shake functions
- ▶ 3 DMX Modes plus master and slave operation
- ▶ 17 Auto Run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual



## SPECIFICATIONS

Product Number:	CLNSCAN100
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	8-Channel Multi Colour
Number Of LEDs:	1
LED Type:	10 W
Dispersion:	12°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 8, 10-Channel
DMX Functions:	Adjustable Audio Sensitivity, Auto Programs, Colour Wheel, Dimmer, duration, Gobo Wheel, PAN, Reset, Pan speed, Sound Control, Strobe, TILT, Tilt Speed
Wireless DMX:	No
PAN Movement:	160°
TILT Movement:	90°
High Speed Strobe:	1 - 20 Hz

Standalone Modes:	Auto Run, Show, Sound Control
Controls:	Enter , Mode , Value Down , Value Up
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	25 W
Power Connector:	IEC Power Input And Output
Max. Output Current:	3 A
Housing Material:	ABS Plastic , Metal
Cabinet Colour:	Black
Protection Class IP:	IP20
Cooling:	Convection
Illuminance:	4,600 lx @ 1m
Max. Ambient Temperature:	0° - 40°
Dimensions (W x H x L):	130 x 293 x 119 mm
Weight:	2.3 kg



## QUAD ROLL 40 4-HEAD BARREL SCANNER

- ▶ 4-head barrel scanner with four 10W Cree RGBW LEDs
- ▶ Quiet, high-quality stepper motors
- ▶ Adjustable barrel rotation speed
- ▶ 4 Modes of DMX control plus sound activation
- ▶ Master, slave and standalone operation
- ▶ 16 automated light shows
- ▶ Dimmer and high-speed Strobe functions
- ▶ 4-button display for easy operation
- ▶ Universal mounting bracket



### SPECIFICATIONS

Product Number:	CLQR40
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	RGBW
Number Of LEDs:	4
LED Type:	10 W Cree
Dispersion:	4.5°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
Protocols:	USITT DMX 512 Protocol
DMX Mode:	2, 4, 12, 18-Channel
DMX Functions:	Auto 1-16, Barrel Movement, Colour Macro, Dimmer, Sound Control, Strobe
High Speed Strobe:	1 - 20 Hz

Standalone Modes:	Auto 1-16, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	100 W
Power Connector:	IEC Power Connector Male / Female
Housing Material:	ABS Plastic, Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	Blue 6,000lx @ 1m, Green 23,500lx @ 1m, Red 17,300lx @ 1m, White 41,300lx @ 1m
Dimensions (W x H x L):	462 x 221 x 137 mm
Weight:	5 kg

Featuring


**CREE**   
LEDs

# TWIN SCAN 20

## DUAL 10W CREE LED GOBO SCANNER



- ▶ 2 individually controllable gobo scanners in a single enclosure
- ▶ Powerful white 10 watt Cree LEDs
- ▶ Each scanner with 9 brilliant colour/gobo combinations + open/white
- ▶ Manual focus adjustment
- ▶ 4 Modes of DMX control
- ▶ Master, slave or standalone operation
- ▶ Automated programs and sound control
- ▶ LED Display with 4 function keys for easy menu navigation
- ▶ Black metal enclosure with hanging bracket and safety eye

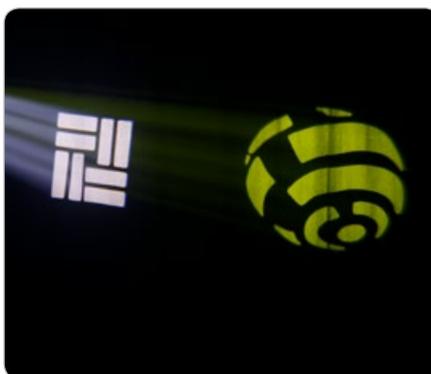

## SPECIFICATIONS

Product Number:	CLTWINSKAN20
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	9 colours + white
Number Of LEDs:	2
LED Type:	10 W
Dispersion:	12°
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female
DMX Mode:	1, 3, 4, 8-Channel
DMX Functions:	Auto 1-16, Barrel Movement, Colour Macro, Dimmer, Sound Control, Strobe
PAN Movement:	55
High Speed Strobe:	1 - 20 Hz

Standalone Modes:	Auto 1-9, Sound Control
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	LED Display
Operating Voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power Consumption:	35 W
Power Connector:	IEC Power Connector Male
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Convection
Illuminance:	2,400 lx @ 1m
Dimensions (W x H x L):	545 x 151 x 180 mm
Weight:	5 kg




## G SCAN 80

NEW

### LED GOBO SCANNER 80 W

- ▶ State-of-the-art LED technology for ultra bright 40,000 lx illuminance
- ▶ Extra smooth pan and tilt with 16-bit precision resolution
- ▶ Colour wheel with Warm Yellow, Lavender, Lime, Cyan, Amber, Yellow, Blue, Green
- ▶ Gobo wheel with 9 gobos + open spot
- ▶ Gobo and colour wheels independently controllable
- ▶ 9-channel and 12-channel DMX control
- ▶ Dimming, high-speed strobe, shutter and gobo shake effects
- ▶ 12 auto-run programs and built-in microphone for sound activation
- ▶ 4-button display for easy configuration and manual control

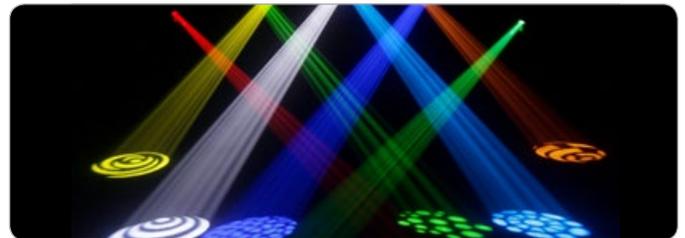

## SPECIFICATIONS

Product Number:	CLSCAN80W
Product Type:	LED Moving Lights
Type:	LED Scanners
Colour Spectrum:	9 Channel Multi Colour Wheel
Number Of LEDs:	1
Colour temperature:	24000 K
Rated avg. life span LED:	50000 hrs.
LED type:	80 W
Refresh rate:	6,000 Hz
Dispersion:	12 °
Number of gobos:	9 + open
DMX Input / Output	XLR 3-pin male / female
RDM:	no
Protocols:	USITT DMX-512
DMX Mode:	9, 12-channel
DMX Functions:	Colour wheel, Continuous operation, Device settings, Dimmer, Gobo Wheel, PAN, PAN FINE, Pan/Tilt Macros, Pan/Tilt Speed, Strobe, TILT, TILT FINE
Wireless DMX:	no
PAN movement:	180°

TILT movement:	90°
High Speed Strobe:	no Hz
Standalone modes:	Auto run ,Sound control
Controls:	Enter, Mode, Value Down, Value Up
Indicators:	4-digit LED display
Operating voltage:	100 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	130 W
When 110V/ 240, how many pcs can be connected:	5 / 5
Fuse:	F3AL
Power Connector:	IEC Power Connector Male
Power through connector:	IEC power connector female
Max. output current:	6 A
Housing Material:	ABS plastic , metal
Cabinet Colour:	Black
Protection class IP:	IP20
Cooling:	temperature-controlled fan
Illuminance:	40,000lx @ 1m
Luminous flux:	1,000 lm
Humidity Range:	not condensing
Dimensions (W x H x L):	190 x 450 x 150 mm
Weight:	4.9 kg





# **LED LIGHT SETS**

It is the ideal lighting solution for clubs, live performers and DJs: the LED PAR set. Usually, four headlights are fixed to a strong bar and form a lighting system. It is an especially popular device for events because of its advantages. An LED PAR set is built up fast with a tripod. It can also be part of a bigger lighting system by clipping it to a rail.



Stand is not included.



# MULTI FX BAR

ALL-IN-ONE SOLUTION WITH 5 LIGHTING EFFECTS  
FOR MOBILE DJS, ENTERTAINERS AND BANDS

## FEATURES

- ▶ All-in-one lighting system with 5 intense effects including 2 brilliant LED PAR cans, 2 rotating LED derbies, 4 Strobe LEDs, a grating laser and UV light
- ▶ Pre-mounted to a bar with Pole insert for instant set-up and use
- ▶ Includes a convenient carry bag, wireless footswitch, infrared remote control and truss Mounting Brackets
- ▶ 46 built-in programs for mesmerizing light shows that include all 5 effects
- ▶ Multiple control options including a 4-button display, DMX, infrared remote, wireless footswitch, sound activation and automatic operation
- ▶ All effects usable individually and in combinations



## SPECIFICATIONS

Product Number:	CLMFXBAR
Product Type:	LED Lighting Effects
Type:	LED / Strobe / Laser Effects
Spot Colour Spectrum:	RGB+UV 12 W
Number Of Spot LEDs:	12
Colour Spectrum Derby Effect:	RGB
Number Of LEDs Derby Effect:	6
LED Type Derby Effect:	3 W
Colour Spectrum Laser Effect:	Green (532 nm), Red (650 nm)
Number Of Diodes Laser Effect:	1 x Green, 1 x Red
Type of Diodes Laser Effect:	red 150 mW, Green 50 mW (DPSS Laser)
Laser Class:	3R
Laser Shutdown (Safety Function):	Connection For External Emergency Stop Switch, Lock Switch
Colour Spectrum Strobe:	White
Number Of LEDs Strobe:	4
LED Type Strobe:	3 W
DMX Input / Output:	XLR 3-Pin Male / XLR 3-Pin Female

DMX Functions:	Auto Programs, Derby, Laser, Sound Sensitivity, Strobe
DMX Mode:	2, 5, 29-Channel
Standalone Modes:	Auto Programs, Colour, Slave Mode, Sound Programs
Controls:	Enter, Mode, Value Up, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	IEC Power Input And Output
Power Consumption:	120 W
Fuse:	T 3.15 A
Max. Ambient Temperature:	120 W
Power Connector:	IEC Power Input And Output
Housing Material:	Metal
Cabinet Colour:	Black
Cooling:	Fan
Dimensions (W x H x L):	1100 x 60 x 60 mm
Weight:	6.3 kg
Features:	IR Remote, Key Switch With 2 Keys, Mounting Brackets, Truss Mounting Angles And Interlock Connector For Optional Emergency Stop Switch, Wireless Footswitch With 12V 23AE Battery



CLMPARCOB1 SET2  
with stand and footswitch



# MULTI PAR COB 1 / SET 2

COMPACT 4 x 30 W RGB COB LED LIGHTING SYSTEM  
INCL. TRANSPORT CASE OR IN A SET WITH  
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

## FEATURES

- ▶ 4 x 30W ultra-bright RGB LEDs
- ▶ COB Technology for smooth colour mixing
- ▶ Professional 28-mm TV adapter for mounting
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode, standalone Mode, IR-Remote or foot switch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Heavy duty aluminium housing
- ▶ Installation points and switchable power plugs for 2 additional lights
- ▶ transport case included



## SPECIFICATIONS

Product Number:	CLMPARCOB1 / CLMPARCOB1SET2
Product Type:	LED Lighting Systems
Spot Colour Spectrum:	RGB
Number Of LEDs:	4 x 1
LED type:	30 W COB
Dispersion:	50°, (with the supplied lens set) 25°
DMX input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	5-channel, 7-channel, 12-channel, 8-channel, 17-channel, 4-channel, 3-channel, 6-channel
DMX Functions:	strobe, sound control, master dimmer, 13 Programs, switchable power sockets 1/2, RGB
Standalone modes:	slave mode, Auto run, static colour, sound control, strobe, 13 Programs
Remote connection:	XLR 5-pin female

Controls:	Enter, mode, Value Up, Value Down
Indicators:	multifunction LC display
Operating voltage:	90 V AC - 240 V AC, 50 - 60 Hz
Power consumption:	120 W
Power connector:	Neutrik PowerCon
Housing material:	Metal
Cabinet colour:	Black
TV spigot:	28 mm
Dimensions (W x H x L):	1005 x 285 x 80 mm
Weight:	9 kg, 18,45 kg (Set)
Features:	IR Remote, Installation points for 2 additional lights, Neutrik PowerCON output
Accessories (included):	Power cord 3m (Neutrik PowerCON), IR-Remote, transport case



CLMPAR2 SET 3  
with stand and footswitch



# MULTI PAR 2 / SET 3

COMPACT 28 x 3 W TRI COLOUR LED LIGHTING SYSTEM  
INCL. TRANSPORT CASE OR IN A SET WITH  
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

## FEATURES

- ▶ 4 x 7 ultra-bright 3 W TRI RGB LEDs
- ▶ Professional 28-mm TV spigot for mounting
- ▶ Operated via DMX, in master/slave Mode, standalone Mode or via footswitch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Sturdy metal housing
- ▶ transport case included



## SPECIFICATIONS

Product Number:	CLMPAR2 / CLMPAR2SET3	Controls:	Mode, Enter, Value Up, Value Down
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods	Indicators:	Multifunction LC display, static colour, sound control, Program selection
Type:	Indoor, Lighting Stands	Operating voltage:	100 V AC - 250 V AC
Colour Spectrum:	RGB	Power consumption:	100 W
Number of LEDs:	4 x 7	Power connector:	IEC power connector female, IEC power connector male
LED type:	3 W TRI Colour	Housing material:	Metal
Dispersion:	25°	Cabinet colour:	Black
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female	Illuminance:	5,450lx @ 1m
DMX mode:	9-channel, 6-channel, 15-channel	TV spigot:	28 mm
DMX Functions:	Master dimmer, colour jump, strobe, sound control, RGB, colour fade	Dimensions (W x H x L):	1030 x 290 x 100 mm
Standalone modes:	Colour change, colour fade, slave mode, sound control, static colour, Auto run	Weight:	8 kg, 17,45 kg (Set)
Remote connection:	XLR 5-pin female	Accessories (included):	Transport case



CLMPAR3 SET 3  
with stand and footswitch



# MULTI PAR 3 / SET 3

COMPACT 28 x 8 W QUAD COLOUR LED LIGHTING SYSTEM INCL. TRANSPORT CASE OR IN A SET WITH TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

## FEATURES

- ▶ 4 x 7 ultra-bright 8 W QUAD RGBW LEDs
- ▶ RGBW for perfect mixing of solid and pastel colours
- ▶ Professional 28-mm TV adapter for mounting
- ▶ Optional footswitch for easy on stage controlling
- ▶ IR-Remote included
- ▶ Operated via DMX, in master/slave Mode or standalone Mode
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Heavy duty aluminium housing
- ▶ Practical transport case included



## SPECIFICATIONS

Product Number:	CLMPAR3 / CLMPAR3SET3
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods
Type:	Indoor, Lighting Stands
Colour Spectrum:	RGBW
Number of LEDs:	4 x 7
LED type:	8 W QUAD Colour
Dispersion:	25°
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	9-channel, 4-channel 1, 21-channel, 16-channel, 4-channel 2, 6-channel, 8-channel
DMX Functions:	RGBW, Program, master dimmer, strobe, sound control, switchable power sockets 1/2
Standalone modes:	static colour, sound control, Auto run, slave mode, colour change, colour fade, Dimmer Mode

Remote connection:	XLR 5-pin female
Controls:	Mode, Enter, Value Up, Value Down
Indicators:	multifunction LC display, sound control, Program selection, static colour
Operating voltage:	90 V AC - 250 V AC, 50 - 60 Hz
Power consumption:	210 W
Power connector:	Neutrik PowerCon
Housing material:	Metal
Cabinet colour:	Black
TV spigot:	28 mm
Dimensions (W x H x L):	1030 x 290 x 100 mm
Weight:	9 kg, 18,45 kg (Set)
Features:	Installation points for 2 additional lights, IR Remote, Neutrik PowerCON output, transport case



CLMPAR1 SET 3  
with stand and footswitch



# MULTI PAR 1 / SET 3

COMPACT 432 x 10 MM LED LIGHTING SYSTEM  
INCL. TRANSPORT CASE OR IN A SET WITH  
TRANSPORT CASE, 4 PEDAL FOOT SWITCH AND STAND

## FEATURES

- ▶ 4 x 108 powerful, long-life 10 mm RGB LEDs
- ▶ Professional 28-mm TV spigot for mounting
- ▶ Operated via DMX, in master/slave Mode, standalone Mode or via footswitch (optional or included in Set)
- ▶ Integrated microphone for sound control
- ▶ Simple to operate using the four buttons and LC-Display
- ▶ Sturdy metal housing
- ▶ transport case included



## SPECIFICATIONS

Product Number:	CLMPAR1 / CLMPAR1SET3
Product Type:	LED Lighting Systems, LED Lighting Systems, LED Lighting System Accessories, Stands and Tripods
Type:	Indoor, Lighting Stands
Colour Spectrum:	RGB
Number of LEDs:	4 x 108
LED type:	10 mm
Dispersion:	25°
DMX Input / Output:	XLR 3-pin male / XLR 3-pin female
DMX mode:	15-channel, 9-channel, 6-channel
DMX Functions:	Master dimmer, strobe, colour fade, colour jump, sound control, RGB
Standalone modes:	Sound control, static colour, colour change, Auto run, slave mode, colour fade
Remote connection:	XLR 5-pin female

Controls:	Mode, Enter, Value Up, Value Down
Indicators:	multifunction LC display, Program selection, sound control, static colour
Operating voltage:	100 V AC - 250 V AC
Power consumption:	50 W
Power connector:	IEC power connector male, IEC power connector female
Housing material:	Metal
Cabinet colour:	Black
TV spigot:	28 mm
Dimensions (W x H x L):	1030 x 290 x 100 mm
Weight:	7 kg, 16,45 kg (Set)
Accessories (included):	Transport case



## MULTI PAR FOOT + 4-SWITCH FOOT PEDAL FOR ALL CLMPAR LIGHT SETS

### FEATURES

- ▶ Easy on stage control for CLMPAR1, CLMPAR2, CLMPAR3 & CLMPARCOB1
- ▶ Functions: black out, full on, sound control, static colours, light 1/2, Auto Run
- ▶ Rugged metal housing
- ▶ 10 m 5-Pin XLR connection cable included

### SPECIFICATIONS

Product Number:	CLMPARFOOTPLUS
Product Type:	LED Lighting System Accessories
Controls:	Blackout, CD / USB / SD, Down, Mode, Up, Microphone sensitivity
Indicators:	Program Selection, Sound Control, Static Colour
Connectors:	5-Pole XLR Socket Male
Dimensions (W x H x L):	291 x 65 x 103 mm
Weight:	1 kg

Suitable for:



CLMPAR1 SET2



CLMPAR2 SET3



CLMPAR3 SET3



CLMPARCOB1 SET2



# **FOG MACHINES**

Sporting an arrangement of 12 colourful RGBA LEDs, Cameo's Steam Wizard 2000 blasts illuminated jets of fog to complement your light show. With top or bottom fluid tank placement and horizontal or vertical mounting options, the powerful fog machine is a stunning performer.



# STEAM WIZARD 2000

FOG MACHINE WITH RGBA LEDS FOR COLOURED FOG EFFECTS

## FEATURES

- ▶ 1,200 W heating element and high-performance pump for powerful blasts of fog
- ▶ 12 x 10W RGBA 4-in-1 LEDs for uniform fog illumination
- ▶ Vertical or horizontal mounting
- ▶ Top or bottom fluid tank placement options
- ▶ Bottom tank placement enables easy overhead installation for downward jets
- ▶ Automatic shutdown prevents pump damage when fluid tank is empty
- ▶ LED indicators for fluid tank and operating status
- ▶ 4-Channel DMX control
- ▶ Includes handheld remote with illuminated buttons and controls for Continuous Timer, Manual, Fog Output, LED Brightness and Colour plus 10m cable



## SPECIFICATIONS

Product Number:	CLSW2000
Product Type:	Fog and Wind Machines
Type:	Fog machine with LEDs
Power:	1200 W
Output volume:	Approx. 500 m³/min
Range Of Fog Output:	Approx. 7 m
Warm-up time:	Approx. 3 min
Fog Duration:	Approx. 10 sec.
Reheating time:	Approx. 8 sec.
Fluid Tank Capacity:	2,5 l
Fluid Consumption:	Approx. 50 ml/min
Number Of LEDs:	12
LED Type:	10 W 4 in 1 LED
Remote Connection:	XLR 5-Pin Male
Remote Cable Length:	10 m

Remote functions:	Duration, Interval, Manual Control, Colour Change, Continuous operation, LED brightness, Output Level
DMX Input / Output:	XLR 3-Pin Male / Female
DMX Mode:	4-Channel
DMX Functions:	Colour Change, Output Level, Colour Fade, Colour Jump, Dimmer, Strobe
Controls:	Mode, Value Up, Enter, Value Down
Indicators:	4-Digit LED Display
Operating Voltage:	230 V AC, 50 Hz
Fuse:	F8AL / 250 V
Power Consumption:	1200 W
Power Connector:	IEC Power Connector Female
Housing Material:	Metal
Cabinet Colour:	Black
Dimensions (W x H x L):	300 x 140 x 420 mm
Weight:	9 kg





## **SNOW FLUID 5L / 15L**

SPECIAL FLUID FOR SNOW MACHINES  
FOR THE PRODUCTION OF FOAM  
**CLFSNOW5L**  
**CLFSNOW15L**



## **BUBBLE FLUID 5L**

SPECIAL FLUID  
FOR GENERATING SOAP BUBBLES  
**CLFBUBBLE5L**



## **XTRA HEAVY FLUID 5L**

FOG FLUID WITH VERY HIGH DENSITY  
AND EXTREME LONG STANDING TIME  
**CLFXHEAVY5L**



## **XTRA HEAVY FLUID 10L**

FOG FLUID WITH VERY HIGH DENSITY  
AND EXTREME LONG STANDING TIME  
**CLFXHEAVY10L**



## **DJ FLUID 5L**

FOG FLUID WITH MEDIUM DENSITY  
AND MEDIUM STANDING TIME  
**CLFDJ5L**



## **DJ FLUID 10L**

FOG FLUID WITH MEDIUM DENSITY  
AND MEDIUM STANDING TIME  
**CLFDJ10L**



## **FINE FLUID 5L**

HAZE EFFECT FOG FLUID WITH  
VERY LOW DENSITY AND VERY  
LONG STANDING TIME  
**CLFFINE5L**



## **FAST FLUID 5L**

FOG FLUID WITH VERY HIGH DENSITY  
AND VERY SHORT STANDING TIME  
**CLFFAST5L**



**HAZE FLUID 5L**

HAZE FLUID FOR FINE FOG DENSITY AND LONG STANDING TIME, OIL-FREE  
**CLFHAZE5L**



**HAZE FLUID 10L**

HAZE FLUID FOR FINE FOG DENSITY AND LONG STANDING TIME, OIL-FREE  
**CLFHAZE10L**



**HEAVY FLUID 5L**

FOG FLUID WITH VERY HIGH DENSITY AND VERY LONG STANDING TIME  
**CLFHEAVY5L**



**HEAVY FLUID 10L**

FOG FLUID WITH VERY HIGH DENSITY AND VERY LONG STANDING TIME  
**CLFHEAVY10L**



**INSTANT HAZE FLUID 5L**

SPECIAL OIL FREE FLUID FOR CAMEO INSTANT HAZE MACHINES  
**CLFIH5L**



**CLEANING FLUID 0.25L**

SPECIAL FLUID FOR CLEANING FOG MACHINES  
**CLFCLEANER250**



**MADE IN GERMANY!**



**BIODEGRADABLE  
BIOLOGISCH ABBAUBAR**

READY FOR USE / GEBRAUCHSFERTIG



 **cameo**<sup>®</sup>  
colours of light

# **ACCESSORIES**

With a selection of rugged, high-quality gear bags for convenient transport, IP65 rated cables and a DMX splitter and booster Cameo covers your needs for lighting fixture accessories.



# SB 6 DUAL / SB 8.3

## 6 OR 8-CHANNEL DMX SPLITTER / BOOSTER (3/5-PIN)

### FEATURES

- ▶ Professional 6-way DMX Splitter / Booster
- ▶ Chassis 1U 19" rack-mount enclosure
- ▶ 6 electrically isolated XLR (3-Pin / 5-Pin) outputs
- ▶ DMX status indicator per channel
- ▶ Power status indicator
- ▶ Switchable 120 Ohm terminating resistor for the DMX THRU output jack
- ▶ Front and rear rack-mount angle attachment options

### SPECIFICATIONS

Product Number:	CLSB6D	CLSB83
Product Type:	Other Lighting Accessories	Other Lighting Accessories
Type:	DMX Splitter / Booster	DMX Splitter / Booster
DMX Inputs:	2 (Parallel)	2 (Parallel)
DMX Input Connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Male
DMX Thru Outputs:	2 (Parallel)	2 (Parallel)
DMX Thru Output Connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Female
DMX Outputs:	6	8 (Electrically Isolated)
DMX Output connectors:	XLR 3-Pin Male, XLR 5-Pin Male	3-Pin XLR Female
Controls:	DMX Thru Terminator, Power On/Off	DMX Thru Terminator, Power On/Off
Indicators:	6 x Power LED, 6 x Signal LED	8 x Power LED, 8 x Signal LED
Mains Connector:	IEC Power Connector	IEC Socket
Power Supply:	Transformer	Transformer
Operating Voltage:	230 V AC, 50 Hz	230 V AC, 50 Hz
Power Consumption:	15 W	15 W
Dimensions (W x H x D):	483 x 44 x 160 mm (Excl. Mntg. Bracket)	483 x 44 x 160 mm (Excl. Mntg. Bracket)
Accessories (Included):	Power Cord	Power Cord



## GEARBAG 100 S

UNIVERSAL EQUIPMENT BAG 230 X  
230 X 310 MM  
**CGB100S**



## GEARBAG 100 M

UNIVERSAL EQUIPMENT BAG  
330 X 330 X 355 MM  
**CGB100M**



## GEARBAG 200 S

UNIVERSAL EQUIPMENT BAG  
330 X 330 X 240 MM  
**CGB200S**



## GEARBAG 200 M

UNIVERSAL EQUIPMENT BAG  
470 X 410 X 270 MM  
**CGB200M**



**GEARBAG 300 S**

UNIVERSAL EQUIPMENT BAG  
460 X 220 X 220 MM  
**CGB300S**



**GEARBAG 300 M**

UNIVERSAL EQUIPMENT BAG  
580 X 250 X 250 MM  
**CGB300M**



**GEARBAG 300 L**

UNIVERSAL EQUIPMENT BAG  
630 X 350 X 350 MM  
**CGB300L**



**GEARBAG 400 S**

UNIVERSAL EQUIPMENT BAG  
1120 X 180 X 115 MM  
**CGB400S**



# DMX ADAPTER OUT

ADAPTER CABLE FOR IP65 OUTDOOR PROJECTOR IP65 PLUG TO XLR FEMALE 3-PIN



## SPECIFICATIONS

Product Number:	CLDMXADAPTEROUT
Product Type:	LED PAR Lighting Accessories
Type:	DMX Adapter
Protection Class IP:	65
Length:	1 m
Weight:	0.12 kg



# DMX EX

## DMX EXTENSION CABLE



### SPECIFICATIONS

Product Number:	CLDMXEX001	CLDMXEX003	CLDMXEX005	CLDMXEX010	CLDMXEX020
Product Type:	LED PAR Lighting Accessories				
Type:	Extension Cable				
Protection Class IP:	65	65	65	65	65
Length:	1 m	3 m	5 m	10 m	20 m
Weight:	0.1 kg	0.12 kg	0.12 kg	0.73 kg	1.3 kg



# P EX

## POWER EXTENSION CABLE



### SPECIFICATIONS

Product Number:	CLPEX001	CLPEX003	CLPEX005	CLPEX010	CLPEX020
Product Type:	LED PAR Lighting Accessories				
Type:	Extension Cable				
Protection Class IP:	65	65	65	65	65
Length:	1 m	3 m	5 m	10 m	20 m
Weight:	0.14 kg	0.22 kg	0.27 kg	0.86 kg	2 kg



# **LASER ACCESSORIES**

To complement your laser fixtures, the Cameo product line includes dedicated accessories.



## EKS 20 M

### EMERGENCY STOP SWITCH WITH KEY CONTROL AND 20 M CABLE

- ▶ Remote emergency stop for laser lights
- ▶ Push-to-stop, twist-to-release red palm button
- ▶ Key control prevents unauthorized operation
- ▶ Fixed 20 m double shielded cable
- ▶ Metal interlock connector

## SPECIFICATIONS

Product Number:	CLLEKS20M
Product Type:	Laser Accessories
Switching function:	Opener (Contact B red) & Shutter (Contact A Green)
Type:	Emergency Stop Switch
Dimensions (W x H x D):	72 x 65 x 110 mm
Weight:	1.1 kg



# ILDA

ILDA EXTENSION CABLE  
INCL. SCREW LOCK

## SPECIFICATIONS

Product Number:	CLLILDA3M	CLLILDA5M	CLLILDA10M	CLLILDA25M
Product Type:	Laser Accessories	Laser Accessories	Laser Accessories	Laser Accessories
Type:	ILDA Signal Cable	ILDA Signal Cable	ILDA Signal Cable	ILDA Signal Cable
Colour:	Black	Black	Black	Black
Length:	3 m	5 m	10 m	25 m
Weight:	0.24 kg	0.36 kg	0.6 kg	2 kg
Features:	Incl. Screw Lock	Incl. Screw Lock	Incl. Screw Lock	Incl. Screw Lock



### Tri-Colour RGB LEDs

Also called 3-in-1, RGB LEDs have red, green and blue emitters to produce the RGB additive Colour Spectrum and white.



### LED Technology

LEDs are extremely advantageous for the use in lighting systems: they are bright, emit very little heat, have a very long lifetime and low energy consumption. Also, LED fixtures often weigh less than conventional fixtures.



### Eco-Friendly

With highly efficient energy use, a very long LED lifetime and low heat emission, this fixture is environmentally friendly.



### DMX512

Created in 1986, DMX512 is a communications standard for lighting equipment. Up to 32 DMX fixtures can be daisy-chained and controlled by a dedicated source, e.g. a lighting console. In a DMX512 daisy chain “network”, the controller is called “master” while the daisy-chained fixtures are the “slaves.”



### “Master” and “Slave”

Simply put, this fixture is able to control or be controlled by other fixtures. In “master” Mode and first in a chain, the fixture acts as a controller for fixtures (“slaves”) that are connected to its output. In “slave” Mode, the input of the fixture is connected to the output of a lighting console or “master.” Fixtures that are daisy-chained to a slave’s output also act as slaves.



### Sound Control

In “sound to light” Mode, the fixture is controlled by a built-in microphone capturing sounds to activate colour changes, e.g. the beat of the music.



### Standalone Mode

In “standalone” Mode, this fixture uses built-in programmes to control its functions. There is no need for a lighting console or “master” controller.



### Strobe Lighting

Strobe lights emit a large number of periodic flashes per second seemingly freezing the movement of objects thus creating the illusion of slow motion.



### Single Pixel Control

This device features single pixel control. With individual LED pixel on/off status and colour control this fixture is capable of creating animated patterns and video panel style pixel-mapping effects.



### Dust Proof Housing

This laser fixture features a dust proof enclosure. The dust proof housing provides effective sealing against the intrusion of dust and particles. This improves performance and minimizes maintenance.



### Quad Colour RGBA/RGBW LEDs

Also called 4-in-1, quad colour LEDs add amber to the RGB spectrum for increased saturation, or white for improved contrast and definition.



### Scan Fail System

This laser fixture features a scan fail system. To provide safe audience scanning and prevent eye damage, the scan fail circuit shuts the laser down when a malfunction or scanner failure is detected, e.g. the display of a single dot beam.



### Analog Modulation

This laser fixture features analog beam modulation. Analog modulation allows you to continuously and smoothly vary the beam intensity. An RGB laser is capable of generating 16.7 million colors with analog modulation while TTL modulated lasers provide only 7 colours and no color fading.



### RGB Additive Colour System

Additive colour mixes use varying amounts of red, green and blue to produce other colours and white. The RGB system is used in television, computer monitors and digital cameras to name a few.



### RGB Additive Colour System Plus Amber LEDs

Amber is a pure colour outside the RGB spectrum. Adding amber LEDs to the RGB system produces deeper, warmer, more saturated colours.



### RGB Additive Colour System Plus White LEDs

Adding white LEDs to the RGB system produces more contrast and definition and enhances the RGB generated white and pastel colours.



### RGBWA

RGB additive colour system plus white and amber LEDs.



### COB LED Technology

The “chip-on-board” multi-LED array is a recent technology that produces a high-density large-area light source with high brightness and uniform diffusion for a rich wash of colours.



### Ingress Protection Rating of 65

The IP code rates the degree of protection against the intrusion of solid objects, water and access to hazardous parts. This fixture is completely protected against hazardous contact, water jets and ingress of dust.



### UV

UV or black lights are employed for decorative and artistic lighting effects.



### ILDA

This laser fixture can be controlled with any ILDA-compatible controller.



### 5-in-1 LED

These fixtures add amber and white to the RGB spectrum for increased saturation, and white for improved contrast and definition.



### 6-in-1 LED

These fixtures add amber, white and UV to the RGB spectrum for increased saturation, and white for improved contrast and definition. UV or black lights are employed for decorative and artistic lighting effects.



### Infrared Remote Control

Featuring an IR sensor, this fixture allows control with a handheld IR remote.



### Remote Foot Controller

This fixture allows control with a remote foot controller.



### Cable Remote

This fixture allows control with a cable remote controller.



### Cold White

“Cold white” is a clean, very bright light in the 5,000 - 10,000 K range with a somewhat artificial touch that goes well with deeply saturated primary colours. Measured in Degrees of Kelvin (K), Colour Temperature indicates the properties of light sources.



### Warm White

“Warm White” is in the 2,000 - 4,000 K range providing a soft light with a slight touch of yellow that is natural and pleasing to the eye. Measured in Degrees of Kelvin (K), Colour Temperature indicates the properties of light sources.



### RDM-Enabled

This fixture is RDM-enabled. The Remote Device Management protocol extension to DMX allows bi-directional communication over a standard DMX network for the convenient configuration, management and monitoring of RDM devices connected to a dedicated RDM controller.



### Unlimited Rotation

This moving head fixture features two high-speed high-torque motors for infinite horizontal and vertical rotation (pan and tilt).



### Pan & Tilt

This moving head fixture features two high-speed high-torque motors for horizontal and vertical rotation (pan and tilt) which are controllable independently.



### Laser Light

Due to its remarkable directional quality laser light maintains brightness and visibility over long distances. Producing tightly focused, narrow beams that are perfect for impressive lighting effects, Laser Sources are extremely energy-efficient.



### Android Compatible

This fixture is delivered with a software allowing control via Android devices.



### Mac OS and iOS Compatible

This fixture is delivered with a software allowing control via Mac OS X and iOS.



### Windows Compatible

This fixture is delivered with a software allowing control via computers running on Windows.



### Zoom Function

This fixture features a motorized or manual zoom to vary its Beam Angle.



### Multiple Angles

This fixture provides multiple beam angles and shapes using the included or optional light shaping diffusers.



*quick release fasteners  
fast, flexible, safe*

*foldable in seconds  
compact and easy to use*

*all aluminium construction  
lightweight, extremely stable*

*smooth and continuous angle adjustment  
independent for top and bottom*

*patented design and function  
unique and revolutionary*

*rubber protectors  
no scratches, no slipping*

*additional height adjustable tray  
for interfaces and accessories*

*foot detachable  
for space saving installation  
table mounting clamp included*


# LAST NIGHT WE SAVED A DJ's LIFE.

## LTS 01 B THE ALL-NEW GRAVITY LAPTOP AND CONTROLLER STAND

table clamp



additional tray



folded



**Gravity**<sup>®</sup>  
stand your ground.



DESIGNED & ENGINEERED IN GERMANY  
[gravitystands.com/LTS01B](http://gravitystands.com/LTS01B)

Article no.	Page
CGB100M	158
CGB100S	158
CGB200M	158
CGB200S	158
CGB300L	158
CGB300M	159
CGB300S	159
CGB400S	159
CLARA	123
CLBARL10RGBA	87
CLBARL10RGBAWH	87
CLBARL10RGBIR	89
CLBARL10RGBIRWH	89
CLCONTROL54	10
CLCONTROL6	11
CLDMXADAPTEROUT	160
CLDMXEX001	161
CLDMXEX003	161
CLDMXEX005	161
CLDMXEX010	161
CLDMXEX020	161
CLDVC4	8
CLEYEYE	124
CLFB150	105
CLFBUBBLE5L	152
CLFCLEANER250	153
CLFDJ10L	152
CLFDJ5L	152
CLFFAST5L	152
CLFFINE5L	152
CLFHAZE10L	153
CLFHAZE5L	153
CLFHEAVY10L	153
CLFHEAVY5L	153
CLFIH5L	153
CLFLATMOON	113
CLFLATSTORM	112
CLFLOWERHP	116
CLFM250	104
CLFSNOW5L	152
CLFXHEAVY10L	152
CLFXHEAVY5L	152
CLHB100RGBW	18
CLHB300RGBW	19
CLHB300W	19
CLHB4000RGBW	20
CLHB400RGBW	22
CLHB400W	20
CLLEKS20M	164

Article no.	Page
CLLILDA10M	165
CLLILDA25M	165
CLLILDA3M	165
CLLILDA5M	165
CLLIODA1000RGB	92
CLLLUKE1000RGB	94
CLLLUKE700RGB	94
CLLWOOKIE150G	96
CLLWOOKIE200R	96
CLLWOOKIE200RGY	96
CLLWOOKIE400RGB	96
CLLWOOKIE600B	96
CLMB100	14
CLMBZ100	16
CLMFXBAR	136
CLMOVER1	117
CLMP3WW	28
CLMPAR1	144
CLMPAR1SET3	144
CLMPAR2	140
CLMPAR2SET3	140
CLMPAR3	142
CLMPAR3SET3	142
CLMPARCOB1	138
CLMPARCOB1SET2	138
CLMPARFOOTPLUS	146
CLNB300	23
CLNROLL100	128
CLNROLL200	129
CLNS300	26
CLNSCAN100	130
CLOFXS	108
CLP56Q8WBS	40
CLP56Q8WPS	40
CLP56RGB05BS	47
CLP56RGB05PS	47
CLP56RGB10BS	46
CLP56RGB10PS	46
CLP56TRI3WBS	43
CLP56TRI3WPS	43
CLP64Q8WBS	39
CLP64Q8WPS	39
CLP64RGB10BS	45
CLP64RGB10PS	45
CLP64RGB3WBS	41
CLP64RGB3WPS	41
CLP64RGBA10BS	44
CLP64RGBA10PS	44
CLP64RGBWAU10WBS	38

Article no.	Page
CLP64RGBWAU10WPS	38
CLP64TRI3WBS	42
CLP64TRI3WPS	42
CLPEX001	161
CLPEX003	161
CLPEX005	161
CLPEX010	161
CLPEX020	161
CLPFLAT1REMOTE	54
CLPFLAT1RGB10IR	54
CLPFLAT1RGB10IRSET1	54
CLPFLAT1RGB10IRWH	54
CLPFLAT1RGBWIR	50
CLPFLAT1RGBWIRWH	50
CLPFLAT1TRI3WIR	52
CLPFLAT1TRI3WIRWH	52
CLPFLAT1TWIR	58
CLPFLAT1TWIRWH	58
CLPFLAT1UVIR	56
CLPFLAT1UVIRWH	56
CLPST64Q8W	70
CLPST64RGBAQ8W	71
CLPST64RGBWAU12W	68
CLPST64RGBWAU12WWH	68
CLPST64TRI3W	72
CLPSTBARND00R1B	77
CLPSTBARND00R1WH	77
CLPSTBARND00R2B	77
CLPSTBARND00R2WH	77
CLPSTMINICOB30W	74
CLPSTMINICOB30WWH	74
CLPSTMINIQ4WW	75
CLPSTMINIQ4WWWH	75
CLPSTMINIQ8W	73
CLPSTMINIQ8WWH	73
CLPSTMINITRI3W	76
CLPSTMINITRI3WWH	76
CLPSTTRI12IP	80
CLQR40	131
CLQS15RGBW	62
CLQS15RGBWWH	62
CLQS15W	64
CLQS15WWH	64
CLQS40RGBW	66
CLQS40RGBWWH	66
CLSB6D	156
CLSB83	156
CLSCAN80W	133
CLSERUM	121

Article no.	Page
CLSTORM	111
CLSTORMFX	114
CLSUPERFLYFX	120
CLSUPERFLYHP	118
CLSUPERFLYXS	119
CLSW2000	150
CLTRIBAR200IR	84
CLTRIBAR200IRWH	84
CLTRIBAR400IR	85
CLTS40WW	32
CLTS40WWWH	32
CLTS60WRGBW	34
CLTS60WRGBWWH	34
CLTW100RGB	103
CLTW100W	102
CLTW600RGB	101
CLTW600W	100
CLTWINSCAN20	132
CLUVBAR200IR	86
CLUVO	110
CLVODOO	122
CLWAYFARER	125



# PRODUCT CATALOGUE

MI/DJ

YOUR CAMEO® DEALER:



**cameolight.com**



facebook.com/cameolightandsound  
youtube.com/cameolightandsound  
blog.adamhall.com

EDITION **2018**



LED Luminaires  
and Retrofit Bulbs  
Licensing Program

Member  
Cameo® is a  
registered brand  
of the Adam Hall  
Group.



The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.