

VLCAM75 Video Conference Camera

Perfect for

Video Conferencing

Gaming & Streaming

Distance Leaning

Home Woking

1-to-1 Video Conferencing

Stand-up Video Conferencing

The Vivolink VLCAM75 video conference camera provides a high-quality video with Full HD 1080p/30fps for a personal video conference experience. In addition, the 80° wide field-of-view angle and outstanding image quality in low-light provides an excellent visual collaboration experience. Thanks to its two built-in omni-directional microphones, it can capture crystal-clear voice up to a distance of 3.6 meters. The USB plug-and-play connectivity and tripod-ready universal clips make it effortless to enrich the online meeting experience.



Key Features

- Full HD 1080p premium video quality
- 80° wide field-of-view angle can capture people with ease
- Dual microphones capture voice from every angle
- Quick and easy USB connecting
- Compatible with Zoom, Skype, Microsoft Teams, Google Meet, etc.

Compatible with




























Product Specifications

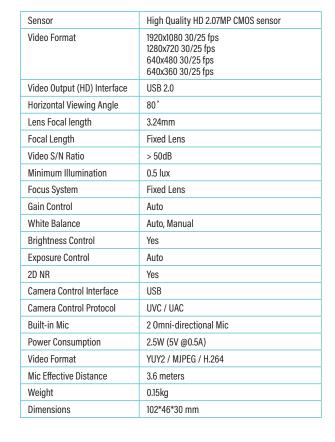





VLCAM100 Ultra-HD ePTZ





USB 3.0 Plug & Play

The VLCAM100 uses standard UVC drivers. There is no need to install special USB drivers. USB 3.0 is 10 times faster than the USB 2.0 standard and it features low latency and non-compress output.



Ultra-View Angle

The VLCAM100 has a panoramic ultra-wide 120° viewing angle that helps users achieve a wider viewing area.



Excellent 4K Image

The VLCAM100 has a professional 8.28 megapixel image sensor that features high resolution, and Vivid color reproduction and presents an excellent image quality even under insufficient light conditions.



With Auto Framing

The VLCAM100 auto framing can auto zoom on people when enter or leave people during the video conferencing



Easy control

The VLCAM100 easy control like Pan, Tilt, Zoom and settings by IR remote controller. Supports Windows, Mac OS, Android system.



255 Preset Positions

The VLCAM100 has 255 presets settings via USB, and 10 preset via remote control for pan, tilt, zoom, focus, and white balance modes for more effective and efficient video recording.









The Vivolink VLCAM100 is a high-definition ePTZ camera specifically designed for small meetings, classrooms and distance learning. It supports USB 3.0 and is plug-and-play with just one USB cable. Thanks to its built-in TV mount, it is easy to install on the TV or on the screen. With the 120° wide viewing angle and 4 time magnification, attendees appear clear. In addition, it has a built-in microphone and is an excellent choice and best suited for distance learning or video conferencing.

Key Features

- Supports USB 3.0 / 2.0 plug & play
- With Auto Framing function
- 4K image sensor with 8.28 Megapixel
- Output resolution up to 3840 x 2160
- Panoramic 120° viewing angle
- 4x digital zoom
- ePTZ, Remote control
- Built-in microphone

Compatible with



















I/O Connections





Sensor	1/2.5" 8.28 MP CMOS
Video Output	Main stream: 3840×2160@30fps 1920×1080P@30fps/25fps 1280×720P@30fps/25fps, etc. Sub-stream: 1280×720P@30fps/25fps 640×480P@30fps/25fps 320×172P@30fps/25fps
Auto Framing Function	Yes
View Angle	126° (Diagonal), 120° (Horizontal)
Minimum Object Distance	50 cm
Remote Control	Yes
Operation Systems	Windows, MacOS™, Linux
Digital Zoom	4x
Camera Control Interface	IR remote control / USB
Driver	UVC/UAC
ePTZ	Support
Preset Positions	IR: 10 Sets USB: 255 sets
Video Format	YUV / MJPEG/ H.264/ H.265
Video Output (HD) Interface	USB 3.0 (USB 2.0 Compatible)
Microphone	Build in 2 microphones
White Balance	Manual / Auto
Exposure Control	Auto
Brightness Control	Yes
Audio Over USB3.0	Yes
Focus System	Fixed Focus
Noise Reduction	2D & 3D DNR
Size	222mm×93.25mm×56.5mm
Weight	Main Unit : 0.53kg

VLCAM200 Conference Kit



The Vivolink VLCAM200 Conference Camera is an indispensable video collaboration tool for businesses that use web- or cloud-based conferencing. Suitable for meeting rooms of all sizes, from huddle rooms all the way up to large conference rooms, the VLCAM200 boasts a powerful pan-tilt-zoom camera and an advanced speakerphone, providing delicate, detailed images and vivid sound quality that more than meet the needs of most businesses. Especially well-suited for laptops, the VLCAM200 's plug-and-play design puts high-quality video communication just a USB connection away.



Powerful 10X Optical Zoom PTZ Camera

Boasting pan-tilt-zoom (PTZ) and 10X optical zoom, the VLCAM200 will meet your video collaboration needs in conference rooms large or small alike, regardless of whether you want detailed views of small objects or wide views of all participants. Moreover, its quick auto-focus, fast lens, subtle pan/tilt grading and wide angle ensure an unbeatably smooth and lifelike conferencing experience.



Simply Plug and Play

The VLCAM200 is incredibly easy to use- simply plug its USB connector into a desktop or laptop and you're ready to go! With no need for device drivers, the VLCAM200 is able to provide top-quality conferencing at a moment's notice, on nearly any computer.



Up to 10 Camera Presets

With the VLCAM200 there's no need to waste time panning and zooming manually during meetings – simply program its presets ahead of time, and then during the meeting you can shift the camera from a wide view of the room to a close-up of an object with just the press a button. With not just 1, but 10 of these presets available, you can prepare yourself for nearly any situation in any environment.



Full HD 1080p Output Resolution

Full HD 1080p has never felt more lifelike! Even in poor lighting you can enjoy detailed, crystal-clear views of people and objects at the far site, and motion blur is nonexistent. With quality like this, you'll forget that everyone isn't even in the same room.



1080







REMOTE CONTROL

PACKAGE CONTENTS

Speakerphone

Camera

Hub

Remote Control

5m camera cable (mini DIN6)

5m speakerphone cable (mini DIN6)

3m USB cable to PC (USB2.0 to PC)

Power supply

Quick-start guide

wall/ceiling mount

CAMERA

10X optical zoom

Pan: 0.1~65°/sec, Tilt:0.1~35°/sec

f/1.6 to f/3.0 (fast lens, perfect picture even in low light)

Full HD 1080p

250° pan; 60° tilt

60.9° FOV

Multi-element, multi-coating

Auto-focus optics

Standard mount screw

Flip horizontal/vertical, capable for reverse ceiling mount

SPEAKERPHONE

Full duplex microphone array up

Touch controls for volume down, up, mute phone input

Max output 95dBSPL

Microphones supporting 360° pick up in 6m diameter range, add extension mic up to 10m

Echo cancellation

Noise suppression

PHYSICAL CHARACTERISTICS

Camera: 151.64×131.25×154.5mm / 1.4kg

Speakerphone: 200×200×52mm/ 1.5kg

Hub: 100×62×27mm / 0.16kg

COMPLIANCE AND TOOLS

YUV, MJPEG, H.264

USB 2.0 compatible

UVC compatible video and audio for broad application compatibility

REMOTE CONTROL

Zoom in/out

Pan up/down left/right

10 camera presets

HUB/CABLES

Mountable hub for connection of all components incl. adhesive for under table mounting

2 x 5m cables for connection between hub and camera/speakerphone

1 x 3m USB cable for connection to PC/Mac

AC Power adapter

HARDWARE REQUIREMENTS*

USB 2.0 port

SYSTEM REQUIREMENTS*

Windows

Mac OS

Linux

COMPATIBLE APPLICATIONS

Skype™, Microsoft® Lync, Google Hangouts™, FaceTime®, Cisco Webex®, GoToMeeting®, Adobe® Connect™, BlueJeans, Zoom, Vidyo®, Fuze, WebRTC

POWER SUPPLY

AC 110V ~ 220V

Consumption: DC12/4A

Compatible with
























VLCAM230 PTZ Pro Camera

The VLCAM230 camera is the perfect choice for a professional conference solution.

Suitable for meeting rooms of all sizes, from huddle rooms all the way up to large conference rooms, the VLCAM230 has a powerful pan-tilt-zoom camera The advanced Image Signal Processing algorithms ensure vivid images with clear brightness and impressive colour reproduction and meet the needs of most businesses. Especially well-suited for laptops, the VLCAM230 's plug-and-play design makes high-quality video communication easy.



Simply Plug and Play

The VLCAM230 is incredibly easy to use-simply plug its USB connector into a desktop or laptop and you're ready to go! With no need for device drivers, the VLCAM230 is able to provide top-quality conferencing at a moment's notice, on nearly any computer.

1080

Full HD 1080P 60fps Output Resolution

Full HD 1080p 60fps has never felt more lifelike! Even in poor lighting you can enjoy detailed, crystal-clear views of people and objects at the far site, and motion blur is nonexistent. With quality like this, you'll forget that everyone isn't even in the same room.

12x Powerful 12X Optical Zoom PTZ Camera

Boasting pan-tilt-zoom (PTZ) and 12X optical zoom, the VLCAM230 will meet your video collaboration needs in conference rooms large or small alike, regardless of whether you want detailed views of small objects or wide views of all participants. Moreover, its quick auto-focus, fast lens, subtle pan/tilt grading and wide angle ensure an unbeatably smooth and lifelike conferencing experience.



72.5° Ultra Wide Angle View

The VLCAM230's ultra-wide angle for 72.5, resulting in top-quality crystal image performance. Enhanced pan/tilt and zoom motor performance make moving from preset to preset smoother. The wide field of view makes it easy to see everyone clearly.



Up to 255 Camera Presets

With the VLCAM230 there's no need to waste time panning and zooming manually during meetings – simply program its presets ahead of time, and then during the meeting you can shift the camera from a wide view of the room to a close-up of an object with just the press a button. With not just 1, but 10 of these presets available by remote control, 255 presets by web you can prepare yourself for nearly any situation in any environment.



8.9 min. F4.



Auto focus optics







PACKAGE CONTENTS

Camera

Remote Control

1.5m USB3.0 cable to PC

Power supply

User Manual

CAMERA

12X optical zoom

USB3.0 video output

Pan: 60°/sec, Tilt: 30°/sec

f/1.8 to f/2.4 (fast lens, perfect picture even in low light)

Full HD 1080p 60fps

340° pan; 120° tilt

72.5° FOV

Multi-element, multi-coating

Auto-focus optics

Standard mount screw

Flip horizontal/vertical, capable for reverse ceiling mount

0.5Lux Minimum Illumination

2D & 3D DNR

White Balance: Auto / Manual/ One Push/ 3000K/ 4000K/5000K/6500K

SNR>55dB

REMOTE CONTROL

Zoom in/out

Pan up/down left/right

10 camera presets

INTERFACE

Double streams outputs simultaneously and camera/speakerphone

3.5mm linear audio input

RS-232 Ring through RS232 output,

Network Protocol: RTSP/RTMP,ONVIF

SYSTEM REQUIREMENTS*

Windows

Mac OS

Linux

HARDWARE REQUIREMENTS*

USB 3.0 port

POWER SUPPLY

AC 110V ~ 220V

Consumption: DC12/4A

USB 3.0

PHYSICAL CHARACTERISTICS

Dimension: 150×150×167.5mm

Weight: 1.4kg

OPTIONAL ACCESSORIES

Wall Mounting/Ceiling Mounting

COMPLIANCE AND TOOLS

YUV, MJPEG, H.264

USB 3.0 & USB 2.0 compatible

UVC compatible

COMPATIBLE APPLICATIONS

Skype™, Zoom, Microsoft® Teams / Lync, Google Hangouts™, FaceTime®, Cisco Webex®, GoToMeeting®, Adobe® Connect™, BlueJeans, Vidyo®, Fuze, WebRTC



* For Full HD support, please check with your software application provider for system/hardware requirements.

Compatible with






















Dimensions







Accessories

Wall or Ceiling mount



	PART NO.
Wall/Ceiling mount	VLMCAM3

Wall mount PTZ camera



	PART NO.
Wall mount PTZ camera	VLMCAM2



USB 3.0 Cable Extension

PART NO.

5m USB3.0 cable extension	PROUSB3AAF5
10m USB3.0 cable extension	PROUSB3AAF10
20m USB3.0 cable extension	PROUSB3AAF20
30m USB3.0 cable extension	PROUSB3AAF30



Mobile stand

Great choice for installing camera and screen for educational purposes and video conference equipment. Mobile and flexible. PART NO. Mobile stand VLFS3266C Typical screen size 42"-90" Camera shelf on top Laptop shelf below screen Easy to assemble Free-tilting and swiveling design Locking rotary knob: ensures a secure position at any height and angle setting Heavy duty casters with locking mechanism Maximum loading capacity: 35kg



EET DANMARK

Phone: +45 45 82 19 19

Phone: +358 09 47 850 900

Phone: +39 02 49 82 756

EET NEDERLAND

Phone: +31 030 219 20 40

www.eetgroup.nl

info@eetgroup.nl

EET ROMÂNIA

www.eetgroup.ro

info@eetgroup.ro

Phone: +40 312 294 520

www.eet.dk

info@eet.dk

www.eet.fi

info@eet.fi

EET ITALIA

www.eet.it

info@eet.it

EET FINLAND

EET BELGIË

EET EESTI

www.eetgroup.ee

info@eetgroup.ee

EET HRVATSKA

www.eetgroup.hr

info@eetgroup.hr

EET LIETUVA

www.eetgroup.lt

info@eetgroup.lt

Phone: +370 52 078 136

Phone: +45 89 88 30 18

Phone: +372 6 093 484

www.eetgroup.be Phone: +32 (0)2 88 88 901 info@eetgroup.be

www.eet.es Phone: +34 902 902 377 info@eet.es

www.eet.ie Phone: +353 (0) 1 4509544

www.eetgroup.hu Phone: +36 1 445 36 27

EET POLSKA

www.eet.pl Phone: +48 58 320 06 60 info@eet.pl

EET SVERIGE

www.eet.se Phone: +46 8 507 510 00 info@eet.se

EET ČESKÁ REPUBLIKA

www.eetgroup.cz Phone: +420 226 259 750 info@eetgroup.cz

EET ESPAÑA

EET IRELAND

info@eet.ie

EET MAGYARORSZÁG

info@eetgroup.hu

EET PORTUGAL

www.eet.pt Phone: +351 308 802 467 info@eet.pt

EET UNITED KINGDOM

www.eet.co.uk Phone: +44 (0) 333 241 9 251 info@eet.co.uk

EET ÖSTERREICH

www.eet.at Phone: +43 (0) 2236 374 014 info@eet.at

EET is not responsible for any typographical errors in this catalogue. All products included in the catalogue are subject to availa-

All trademarks or registered trademarks used in this publication are the properties of their respective owners and are used here

bility. EET reserves the right to alter product offerings and specifications at any time, without notice.

for purposes of identification only.

Some products may not be available in your country.

EET DEUTSCHLAND

www.eet.de Phone: +49 2173 200 41 0 info@eet.de

EET FRANCE

www.eet.fr Phone: +33 (0)1 41 27 21 00 info@eet.fr

EET LATVIJA

www.eetgroup.lv Phone: +371 67 881 258 info@eetgroup.lv

EET NORGE

www.eet.no Phone: +47 22 91 95 00 info@eet.no

www.eetgroup.ch Phone: +41 41 785 13 13 info@eetgroup.ch

OTHER COUNTRIES

www.eet.eu Phone: +45 89 88 30 18 info@eet.eu

[CAT-VIVOLINK-CAM2020]

